1	INTERNET-DRAFT
2	draft-ietf-ipp-model-v11-00.txt
3	R. deBry
4	IBM Corporation
5	T. Hastings (editor)
6	Xerox Corporation
7	R. Herriot
8	Xerox Corporation S. Isaacson
9 10	Novell, Inc.
11	P. Powell
12	Astart Technologies
13	February 17, 1998
14	
15	Internet Printing Protocol/1.1: Model and Semantics
16	Copyright (C) The Internet Society (1999). All Rights Reserved.
17	Status of this Memo
18	This document is an Internet-Draft and is in full conformance with all provisions of Section 10 of
19	[RFC2026]. Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its
20	areas, and its working groups. Note that other groups may also distribute working documents as
21	Internet-Drafts.
22	Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or
23	obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material
24	or to cite them other than as "work in progress".
25	The list of current Internet-Drafts can be accessed at http://www.ietf.org/ietf/1id-abstracts.txt
26	The list of Internet-Draft Shadow Directories can be accessed as http://www.ietf.org/shadow.html.
27	Abstract
28	This document is one of a set of documents, which together describe all aspects of a new Internet
29	Printing Protocol (IPP). IPP is an application level protocol that can be used for distributed printing
30	using Internet tools and technologies. This document describes a simplified model consisting of abstract
31	objects, their attributes, and their operations that is independent of encoding and transport. The model
32	consists of a Printer and a Job object. A Job optionally supports multiple documents. IPP 1.1 semantics
33	allow end-users and operators to query printer capabilities, submit print jobs, inquire about the status of
34	print jobs and printers, cancel, hold, release, and restart print jobs. IPP 1.1 semantics allow operators to
35	pause, resume, and purge (jobs from) Printer objects. This document also addresses security,
36	internationalization, and directory issues.
37	The full set of IPP documents includes:
38	Design Goals for an Internet Printing Protocol [IPP-REQ]
	deBry, Hastings, Herriot, Isaacson, Powell [Page 1]
	Expires August 17, 1999

- Rationale for the Structure and Model and Protocol for the Internet Printing Protocol [IPP-RAT]
- Internet Printing Protocol/1.1: Model and Semantics (this document)
- Internet Printing Protocol/1.1: Encoding and Transport [IPP-PRO]
- Internet Printing Protocol/1.1: Implementer's Guide [IPP-IIG]
- 43 Mapping between LPD and IPP Protocols [IPP LPD]

- The "Design Goals for an Internet Printing Protocol" document takes a broad look at distributed printing
- functionality, and it enumerates real-life scenarios that help to clarify the features that need to be
- included in a printing protocol for the Internet. It identifies requirements for three types of users: end
- users, operators, and administrators. It calls out a subset of end user requirements that are satisfied in
- 49 IPP/1.0. Operator and administrator requirements are out of scope for version 1.0. A few OPTIONAL
- operator operations have been added to IPP/1.1.
- The "Rationale for the Structure and Model and Protocol for the Internet Printing Protocol" document
- describes IPP from a high level view, defines a roadmap for the various documents that form the suite of
- 53 IPP specifications, and gives background and rationale for the IETF working group's major decisions.
- The "Internet Printing Protocol/1.1: Encoding and Transport" document is a formal mapping of the
- abstract operations and attributes defined in the model document onto HTTP/1.1. It defines the encoding
- rules for a new Internet MIME media type called "application/ipp". This document also defines the rules
- for transporting over HTTP a message body whose Content-Type is "application/ipp". This document
- defines a new scheme named 'ipp' for identifying IPP printers and jobs. Finally, this document defines
- rules for supporting IPP/1.0 clients.
- The "Internet Printing Protocol/1.1: Implementer's Guide" document gives insight and advice to
- 61 implementers of IPP clients and IPP objects. It is intended to help them understand IPP/1.1 and some of
- the considerations that may assist them in the design of their client and/or IPP object implementations.
- For example, a typical order of processing requests is given, including error checking. Motivation for
- some of the specification decisions is also included.
- The "Mapping between LPD and IPP Protocols" document gives some advice to implementers of
- gateways between IPP and LPD (Line Printer Daemon) implementations.

# **Table of Contents**

68	1. Introduction	10
69	1.1 Simplified Printing Model	11
70	2. IPP Objects	13
71	2.1 Printer Object	
72	2.2 Job Object	
73	2.3 Object Relationships	
74	2.4 Object Identity	
75	3. IPP Operations	19
76	3.1 Common Semantics	
77	3.1.1 Required Parameters	20
78	3.1.2 Operation IDs and Request IDs	
79	3.1.3 Attributes	21
80	3.1.4 Character Set and Natural Language Operation Attributes	
81	3.1.4.1 Request Operation Attributes	23
82	3.1.4.2 Response Operation Attributes	
83	3.1.5 Operation Targets	26
84	3.1.6 Operation Status Codes and Messages	28
85	3.1.7 Versions	28
86	3.1.8 Job Creation Operations	30
87	3.2 Printer Operations	31
88	3.2.1 Print-Job Operation	31
89	3.2.1.1 Print-Job Request	31
90	3.2.1.2 Print-Job Response	
91	3.2.2 Print-URI Operation	
92	3.2.3 Validate-Job Operation	
93	3.2.4 Create-Job Operation	
94	3.2.5 Get-Printer-Attributes Operation	
95	3.2.5.1 Get-Printer-Attributes Request	
96	3.2.5.2 Get-Printer-Attributes Response	41
97	3.2.6 Get-Jobs Operation	
98	3.2.6.1 Get-Jobs Request	
99	3.2.6.2 Get-Jobs Response	
00	3.2.7 Pause-Printer Operation	44
101	3.2.7.1 Pause-Printer Request	
102	3.2.7.2 Pause-Printer Response	46
103	3.2.8 Resume-Printer Operation	46
04	3.2.9 Purge-Jobs Operation	47
105	3.3 Job Operations	
06	3.3.1 Send-Document Operation	
107	3.3.1.1 Send-Document Request	49
801	3.3.1.2 Send-Document Response	50

109	3.3.2	Send-URI Operation	51
110	3.3.3	Cancel-Job Operation	51
111	3.3.3.1	1 Cancel-Job Request	51
112	3.3.3.2	2 Cancel-Job Response	52
113	3.3.4	Get-Job-Attributes Operation	53
114	3.3.4.1	1 Get-Job-Attributes Request	53
115	3.3.4.2	2 Get-Job-Attributes Response	54
116	3.3.5	Hold-Job Operation	55
117	3.3.5.1	1 Hold-Job Request	55
118	3.3.5.2	2 Hold-Job Response	56
119	3.3.6	Release-Job Operation	56
120	3.3.7	Restart-Job Operation	57
121	3.3.7.1	1 Restart-Job Request	58
122	3.3.7.2	2 Restart-Job Response	59
123	4. Objec	t Attributes	59
124	4.1 Att	ribute Syntaxes	59
125	4.1.1	'text' 60	
126	4.1.1.1	1 'textWithoutLanguage'	61
127	4.1.1.2	2 'textWithLanguage'	61
128	4.1.2	'name' 62	
129	4.1.2.1	1 'nameWithoutLanguage'	62
130	4.1.2.2		
131	4.1.2.3	Matching 'name' attribute values	63
132	4.1.3	'keyword'	63
133	4.1.4	'enum' 64	
134	4.1.5	'uri' 65	
135	4.1.6	'uriScheme'	65
136	4.1.7	'charset'	65
137	4.1.8	'naturalLanguage'	
138	4.1.9	'mimeMediaType'	66
139	4.1.10	'octetString'	67
140	4.1.11	'boolean'	67
141	4.1.12	'integer'	68
142	4.1.13	'rangeOfInteger'	68
143	4.1.14	'dateTime'	68
144	4.1.15	'resolution'	68
145	4.1.16	'1setOf X'	68
146	4.2 Job	Template Attributes	69
147	4.2.1	job-priority (integer(1:100))	
148	4.2.2	job-hold-until (type3 keyword   name (MAX))	
149	4.2.3	job-sheets (type3 keyword   name(MAX))	73
150	4.2.4	multiple-document-handling (type2 keyword)	74
151	4.2.5	copies (integer(1:MAX))	75
152	4.2.6	finishings (1setOf type2 enum)	75

February 17, 1999

153	4.2.7	page-ranges (1setOf rangeOfInteger (1:MAX))	77
154	4.2.8	sides (type2 keyword)	78
155	4.2.9	number-up (integer(1:MAX))	78
156	4.2.10	orientation-requested (type2 enum)	79
157	4.2.11	media (type3 keyword   name(MAX))	80
158	4.2.12	printer-resolution (resolution)	80
159	4.2.13	print-quality (type2 enum)	80
160	4.3 Job	Description Attributes	81
161	4.3.1	job-uri (uri)	83
162	4.3.2	job-id (integer(1:MAX))	83
163	4.3.3	job-printer-uri (uri)	83
164	4.3.4	job-more-info (uri)	83
165	4.3.5	job-name (name(MAX))	84
166	4.3.6	job-originating-user-name (name(MAX))	84
167	4.3.7	job-state (type1 enum)	84
168	4.3.7.	1 Partitioning of Job States	87
169	4.3.8	job-state-reasons (1setOf type2 keyword)	87
170	4.3.9	job-state-message (text(MAX))	
171	4.3.10	number-of-documents (integer(0:MAX))	90
172	4.3.11	output-device-assigned (name(127))	90
173	4.3.12	time-at-creation (integer(0:MAX))	90
174	4.3.13	time-at-processing (integer(0:MAX))	90
175	4.3.14	time-at-completed (integer(0:MAX))	90
176	4.3.15	number-of-intervening-jobs (integer(0:MAX))	90
177	4.3.16	job-message-from-operator (text(127))	90
178	4.3.17	job-k-octets (integer(0:MAX))	91
179	4.3.18	job-impressions (integer(0:MAX))	91
180	4.3.19	job-media-sheets (integer(0:MAX))	
181	4.3.20	job-k-octets-processed (integer(0:MAX))	92
182	4.3.21	job-impressions-completed (integer(0:MAX))	
183	4.3.22	job-media-sheets-completed (integer(0:MAX))	92
184	4.3.23	attributes-charset (charset)	93
185	4.3.24	attributes-natural-language (naturalLanguage)	
186	4.4 Pri	nter Description Attributes	
187	4.4.1	printer-uri-supported (1setOf uri)	
188	4.4.2	uri-security-supported (1setOf type2 keyword)	95
189	4.4.3	printer-name (name(127))	
190	4.4.4	printer-location (text(127))	
191	4.4.5	printer-info (text(127))	
192	4.4.6	printer-more-info (uri)	
193	4.4.7	printer-driver-installer (uri)	
194	4.4.8	printer-make-and-model (text(127))	
195	4.4.9	printer-more-info-manufacturer (uri)	
196	4.4.10	printer-state (type1 enum)	
197	4.4.11	printer-state-reasons (1setOf type2 keyword)	99

198	4.4.12	printer-state-message (text(MAX))	101
199	4.4.13	operations-supported (1setOf type2 enum)	101
200	4.4.14	charset-configured (charset)	
201	4.4.15	charset-supported (1setOf charset)	102
202	4.4.16	natural-language-configured (naturalLanguage)	102
203	4.4.17	generated-natural-language-supported (1setOf naturalLanguage)	
204	4.4.18	document-format-default (mimeMediaType)	
205	4.4.19	document-format-supported (1setOf mimeMediaType)	103
206	4.4.20	printer-is-accepting-jobs (boolean)	
207	4.4.21	queued-job-count (integer(0:MAX))	103
208	4.4.22	printer-message-from-operator (text(127))	103
209	4.4.23	color-supported (boolean)	104
210	4.4.24	reference-uri-schemes-supported (1setOf uriScheme)	104
211	4.4.25	pdl-override-supported (type2 keyword)	
212	4.4.26	printer-up-time (integer(1:MAX))	
213	4.4.27	printer-current-time (dateTime)	
214	4.4.28	multiple-operation-time-out (integer(1:MAX))	
215	4.4.29	compression-supported (1setOf type3 keyword)	
216	4.4.30	job-k-octets-supported (rangeOfInteger(0:MAX))	
217	4.4.31	job-impressions-supported (rangeOfInteger(0:MAX))	
218	4.4.32	job-media-sheets-supported (rangeOfInteger(0:MAX))	
219	4.4.33	pages-per-minute (integer(0:MAX))	
220	4.4.34	pages-per-minute-color (integer(0:MAX))	
221	5. Confo	ormance	107
222		ent Conformance Requirements	
223		Object Conformance Requirements	
224	5.2.1	Objects	
225	5.2.2	Operations.	
226	5.2.3	IPP Object Attributes	
227	5.2.4	Versions	
228	5.2.5	Extensions	
229	5.2.6	Attribute Syntaxes	109
230		arset and Natural Language Requirements	
231		curity Conformance Requirements	
232	6. IANA	Considerations (registered and private extensions)	110
233		ped 'keyword' and 'enum' Extensions	
234	• .	ribute Extensibility	
235		ribute Syntax Extensibility	
236		eration Extensibility	
237	-	ribute Groups	
238		itus Code Extensibility	
239		gistration of MIME types/sub-types for document-formats	
240		gistration of chargets for use in 'charget' attribute values	

241	7. Internationalization Considerations	115
242	8. Security Considerations	117
243	8.1 Security Scenarios.	
244	8.1.1 Client and Server in the Same Security Domain	
245	8.1.2 Client and Server in Different Security Domains	
246	8.1.3 Print by Reference	
247	8.2 URIs for TLS and non-TLS Access	
248	8.3 The "requesting-user-name" (name(MAX)) Operation Attribute	
249	8.4 Restricted Queries	
250	8.5 Operations performed by operators and system administrators	
251	8.6 Queries on jobs submitted using non-IPP protocols	
252	8.7 IPP Security Application Profile for TLS	
253	9. References	122
254	10. Notices	125
255	11. Author's Address	126
256	12. Formats for IPP Registration Proposals	129
257	12.1 Type2 keyword attribute values registration	
258	12.2 Type3 keyword attribute values registration	
259	12.3 Type2 enum attribute values registration	
260	12.4 Type3 enum attribute values registration	
261	12.5 Attribute registration	
262	12.6 Attribute Syntax registration	
263	12.7 Operation registration	
264	12.8 Attribute Group registration	
265	12.9 Status code registration	
266	13. APPENDIX A: Terminology	132
267	13.1 Conformance Terminology	
268	13.1.1 NEED NOT	
269	13.2 Model Terminology	
270	13.2.1 Keyword	
271	13.2.2 Attributes	132
272	13.2.2.1 Attribute Name	133
273	13.2.2.2 Attribute Group Name	133
274	13.2.2.3 Attribute Value	133
275	13.2.2.4 Attribute Syntax	133
276	13.2.3 Supports	133
277	13.2.4 print-stream page	135
278	13.2.5 impression	
279	14. APPENDIX B: Status Codes and Suggested Status Code Messages	135

280	14.1 Status Codes	136
281	14.1.1 Informational	136
282	14.1.2 Successful Status Codes	136
283	14.1.2.1 successful-ok (0x0000)	136
284	14.1.2.2 successful-ok-ignored-or-substituted-attributes (0x0001)	137
285	14.1.2.3 successful-ok-conflicting-attributes (0x0002)	
286	14.1.3 Redirection Status Codes	
287	14.1.4 Client Error Status Codes	
288	14.1.4.1 client-error-bad-request (0x0400)	137
289	14.1.4.2 client-error-forbidden (0x0401)	
290	14.1.4.3 client-error-not-authenticated (0x0402)	
291	14.1.4.4 client-error-not-authorized (0x0403)	
292	14.1.4.5 client-error-not-possible (0x0404)	
293	14.1.4.6 client-error-timeout (0x0405)	
294	14.1.4.7 client-error-not-found (0x0406)	
295	14.1.4.8 client-error-gone (0x0407)	
296	14.1.4.9 client-error-request-entity-too-large (0x0408)	
297	14.1.4.10 client-error-request-value-too-long (0x0409)	
298	14.1.4.11 client-error-document-format-not-supported (0x040A)	
299	14.1.4.12 client-error-attributes-or-values-not-supported (0x040B)	
300	14.1.4.13 client-error-uri-scheme-not-supported (0x040C)	
301	14.1.4.14 client-error-charset-not-supported (0x040D)	
302	14.1.4.15 client-error-conflicting-attributes (0x040E)	
303	14.1.5 Server Error Status Codes	
304	14.1.5.1 server-error-internal-error (0x0500)	
305	14.1.5.2 server-error-operation-not-supported (0x0501)	
306	14.1.5.3 server-error-service-unavailable (0x0502)	
307	14.1.5.4 server-error-version-not-supported (0x0503)	
308	14.1.5.5 server-error-device-error (0x0504)	
309	14.1.5.6 server-error-temporary-error (0x0505)	
310	14.1.5.7 server-error-not-accepting-jobs (0x0506)	
311	14.1.5.8 server-error-busy (0x0507)	
312	14.1.5.9 server-error-job-canceled (0x0508)	
313	14.2 Status Codes for IPP Operations	
314	15. APPENDIX C: "media" keyword values	144
315	16. APPENDIX D: Processing IPP Attributes	148
316	16.1 Fidelity	
317	16.2 Page Description Language (PDL) Override	
318	16.3 Using Job Template Attributes During Document Processing	
319	17. APPENDIX E: Generic Directory Schema	152
320	18. APPENDIX F: Differences between the IPP/1.0 and IPP/1.1 "Model and Seman	ntics" Specifications
321		•

#### 1. Introduction

324

335

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

- The Internet Printing Protocol (IPP) is an application level protocol that can be used for distributed
- printing using Internet tools and technologies. IPP version 1.1 (IPP/1.1) focuses only on end user
- functionality. This document is just one of a suite of documents that fully define IPP. The full set of
- 328 IPP documents includes:
- Design Goals for an Internet Printing Protocol [IPP-REQ]
- Rationale for the Structure and Model and Protocol for the Internet Printing Protocol [IPP-RAT]
- Internet Printing Protocol/1.1: Model and Semantics (this document)
- Internet Printing Protocol/1.1: Encoding and Transport [IPP-PRO]
- Internet Printing Protocol/1.1: Implementer's Guide [IPP-IIG]
- Mapping between LPD and IPP Protocols [IPP-LPD]

Anyone reading these documents for the first time is strongly encouraged to read the IPP documents in the above order.

- This document is laid out as follows:
  - The rest of Section 1 is an introduction to the IPP simplified model for distributed printing.
  - Section 2 introduces the object types covered in the model with their basic behaviors, attributes, and interactions.
  - Section 3 defines the operations included in IPP/1.1. IPP operations are synchronous, therefore, for each operation, there is a both request and a response.
  - Section 4 defines the attributes (and their syntaxes) that are used in the model.
  - Sections 5 6 summarizes the implementation conformance requirements for objects that support the protocol and IANA considerations, respectively.
  - Sections 7 12 cover the Internationalization and Security considerations as well as References, Intellectual Property Notice, Copyright Notice, Author contact information, and Formats for Registration Proposals.
  - Sections 13 15 are appendices that cover Terminology, Status Codes and Messages, and "media" keyword values.

Note: This document uses terms such as "attributes", "keywords", and "support". These terms have special meaning and are defined in the model terminology section 13.2. Capitalized terms, such as MUST, MUST NOT, REQUIRED, SHOULD, SHOULD NOT, MAY, NEED NOT, and OPTIONAL, have special meaning relating to conformance. These terms are defined in section 13.1 on conformance terminology, most of which is taken from RFC 2119 [RFC2119].

- Section 16 is an appendix that helps to clarify the effects of interactions between related attributes and their values.
- Section 17 is an appendix that enumerates the subset of Printer attributes that form a generic directory schema. These attributes are useful when registering a Printer so that a client can find the Printer not just by name, but by filtered searches as well.

February 17, 1999

- Section 18 is an appendix summarizing the additions and changes from the IPP/1.0 "Model and Semantics" specification [IPP-MOD1.0] to make this IPP/1.1 document.

### 1.1 Simplified Printing Model

363

364

365

380

383


In order to achieve its goal of realizing a workable printing protocol for the Internet, the Internet Printing 366 Protocol (IPP) is based on a simplified printing model that abstracts the many components of real world 367 printing solutions. The Internet is a distributed computing environment where requesters of print 368 services (clients, applications, printer drivers, etc.) cooperate and interact with print service providers. 369 This model and semantics document describes a simple, abstract model for IPP even though the 370 underlying configurations may be complex "n-tier" client/server systems. An important simplifying step 371 in the IPP model is to expose only the key objects and interfaces required for printing. The model 372 described in this model document does not include features, interfaces, and relationships that are beyond 373 the scope of the first version of IPP (IPP/1.1). IPP/1.1 incorporates many of the relevant ideas and 374 lessons learned from other specification and development efforts [HTPP] [ISO10175] [LDPA] 375 [P1387.4] [PSIS] [RFC1179] [SWP]. IPP is heavily influenced by the printing model introduced in the 376 Document Printing Application (DPA) [ISO10175] standard. Although DPA specifies both end user and 377 administrative features, IPP version 1.1 (IPP/1.1) focuses primarily on end user functionality with a few 378 additional OPTIONAL operator operations. 379

The IPP/1.1 model encapsulates the important components of distributed printing into two object types:

- Printer (Section 2.1)
- 382 Job (Section 2.2)

Each object type has an associated set of operations (see section 3) and attributes (see section 3.3.5).

It is important, however, to understand that in real system implementations (which lie underneath the abstracted IPP/1.1 model), there are other components of a print service which are not explicitly defined in the IPP/1.1 model. The following figure illustrates where IPP/1.1 fits with respect to these other components.

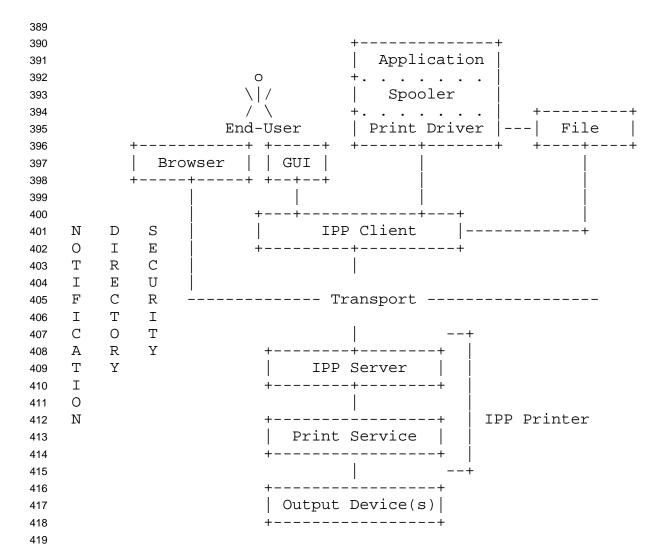

An IPP Printer object encapsulates the functions normally associated with physical output devices along with the spooling, scheduling and multiple device management functions often associated with a print server. Printer objects are optionally registered as entries in a directory where end users find and select them based on some sort of filtered and context based searching mechanism (see section 17). The directory is used to store relatively static information about the Printer, allowing end users to search for and find Printers that match their search criteria, for example: name, context, printer capabilities, etc. The more dynamic information, such as state, currently loaded and ready media, number of jobs at the Printer, errors, warnings, and so forth, is directly associated with the Printer object itself rather than with the entry in the directory which only represents the Printer object.

IPP clients implement the IPP protocol on the client side and give end users (or programs running on behalf of end users) the ability to query Printer objects and submit and manage print jobs. An IPP server is just that part of the Printer object that implements the server-side protocol. The rest of the Printer object implements (or gateways into) the application semantics of the print service itself. The Printer objects may be embedded in an output device or may be implemented on a host on the network that communicates with an output device.

- When a job is submitted to the Printer object and the Printer object validates the attributes in the
- submission request, the Printer object creates a new Job object. The end user then interacts with this
- new Job object to query its status and monitor the progress of the job. An end user can also cancel their
- print jobs by using the Job object's Cancel-Job operation. An end-user can also hold, release, and restart
- their print jobs using the Job object's OPTIONAL Hold-Job, Release-Job, and Restart-Job operations, if
- implemented.
- A privileged operator or administrator of a Printer object can cancel, hold, release, and restart any user's
- job using the REQUIRED Cancel-Job and the OPTIONAL Hold-Job, Release-Job, and Restart-Job
- operations. In additional privileged operator or administrator of a Printer object can pause, resume, or
- purge (jobs from) a Printer object using the OPTIONAL Pause-Printer, Resume-Printer, and Purge-Jobs
- operations, if implemented.
- The notification service is out of scope for this IPP/1.1 specification, but using such a notification
- service, the end user is able to register for and receive Printer specific and Job specific events. An end
- user can query the status of Printer objects and can follow the progress of Job objects by polling using
- the Get-Printer-Attributes, Get-Jobs, and Get-Job-Attributes operations.

### 450 2. IPP Objects

- The IPP/1.1 model introduces objects of type Printer and Job. Each type of object models relevant
- aspects of a real-world entity such as a real printer or real print job. Each object type is defined as a set
- of possible attributes that may be supported by instances of that object type. For each object (instance),
- the actual set of supported attributes and values describe a specific implementation. The object's
- attributes and values describe its state, capabilities, realizable features, job processing functions, and
- default behaviors and characteristics. For example, the Printer object type is defined as a set of attributes
- that each Printer object potentially supports. In the same manner, the Job object type is defined as a set
- of attributes that are potentially supported by each Job object.
- Each attribute included in the set of attributes defining an object type is labeled as:
- "REQUIRED": each object MUST support the attribute.
- "OPTIONAL": each object MAY support the attribute.

462

465

- There is no such similar labeling of attribute values. However, if an implementation supports an
- attribute, it MUST support at least one of the possible values for that attribute.

### 2.1 Printer Object

- The major component of the IPP/1.1 model is the Printer object. A Printer object implements the server-
- side of the IPP/1.1 protocol. Using the protocol, end users may query the attributes of the Printer object
- and submit print jobs to the Printer object. The actual implementation components behind the Printer
- abstraction may take on different forms and different configurations. However, the model abstraction

475

476

477 478

483

484

485

486

487 488

- allows the details of the configuration of real components to remain opaque to the end user. Section 3 describes each of the Printer operations in detail.
- The capabilities and state of a Printer object are described by its attributes. Printer attributes are divided into two groups:
  - "job-template" attributes: These attributes describe supported job processing capabilities and defaults for the Printer object. (See section 4.2)
  - "printer-description" attributes: These attributes describe the Printer object's identification, state, location, references to other sources of information about the Printer object, etc. (see section 4.4)
- Since a Printer object is an abstraction of a generic document output device and print service provider, a
  Printer object could be used to represent any real or virtual device with semantics consistent with the
  Printer object, such as a fax device, an imager, or even a CD writer.
- Some examples of configurations supporting a Printer object include:
  - 1) An output device with no spooling capabilities
  - 2) An output device with a built-in spooler
  - 3) A print server supporting IPP with one or more associated output devices
    - 3a) The associated output devices may or may not be capable of spooling jobs
  - 3b) The associated output devices may or may not support IPP

The following figures show some examples of how Printer objects can be realized on top of various distributed printing configurations. The embedded case below represents configurations 1 and 2. The hosted and fan-out figures below represent configurations 3a and 3b.

```
Legend:
492
493
    ##### indicates a Printer object which is
494
         either embedded in an output device or is
495
         hosted in a server. The Printer object
496
         might or might not be capable of queuing/spooling.
497
498
         indicates any network protocol or direct
499
         connect, including IPP
500
501
502
   embedded printer:
503
                                        output device
504
505
                                       ##########
506
    507
                                       | # Object #
508
509
510
511
512
   hosted printer:
513
514
    O +----+ ##########
515
    /|\ | client |--IPP--># Printer #-any->| output device |
516
    517
                      ##########
518
519
520
521
522
   fan out:
523
                                    +-->| output device |
524
525
    O +----+ ######### /
526
    /|\ | client |-IPP-># Printer #--*
527
    528
529
                                    +-->| output device |
530
531
532
533
534
535
```

2.2 Job Object

A Job object is used to model a print job. A Job object contains documents. The information required to create a Job object is sent in a create request from the end user via an IPP Client to the Printer object.

- The Printer object validates the create request, and if the Printer object accepts the request, the Printer object creates the new Job object. Section 3 describes each of the Job operations in detail.
- The characteristics and state of a Job object are described by its attributes. Job attributes are grouped into two groups as follows:
  - "job-template" attributes: These attributes can be supplied by the client or end user and include job processing instructions which are intended to override any Printer object defaults and/or instructions embedded within the document data. (See section 4.2)
  - "job-description" attributes: These attributes describe the Job object's identification, state, size, etc. The client supplies some of these attributes, and the Printer object generates others. (See section 4.3)

549

550

551

552

542

543

544

545

546

- An implementation MUST support at least one document per Job object. An implementation MAY support multiple documents per Job object. A document is either:
  - a stream of document data in a format supported by the Printer object (typically a Page Description Language PDL), or
  - a reference to such a stream of document data

553554

- In IPP/1.1, a document is not modeled as an IPP object, therefore it has no object identifier or associated attributes. All job processing instructions are modeled as Job object attributes. These attributes are called Job Template attributes and they apply equally to all documents within a Job object.
  - 2.3 Object Relationships
- IPP objects have relationships that are maintained persistently along with the persistent storage of the object attributes.
- A Printer object can represent either one or more physical output devices or a logical device which
  "processes" jobs but never actually uses a physical output device to put marks on paper. Examples of
  logical devices include a Web page publisher or a gateway into an online document archive or
- repository. A Printer object contains zero or more Job objects.
- A Job object is contained by exactly one Printer object, however the identical document data associated with a Job object could be sent to either the same or a different Printer object. In this case, a second Job object would be created which would be almost identical to the first Job object, however it would have new (different) Job object identifiers (see section 2.4).
- A Job object is either empty (before any documents have been added) or contains one or more documents. If the contained document is a stream of document data, that stream can be contained in only one document. However, there can be identical copies of the stream in other documents in the same or different Job objects. If the contained document is just a reference to a stream of document data, other documents (in the same or different Job object(s)) may contain the same reference.

## 574 2.4 Object Identity

- All Printer and Job objects are identified by a Uniform Resource Identifier (URI) [RFC2396] so that they
- can be persistently and unambiguously referenced. The notion of a URI is a useful concept, however,
- until the notion of URI is more stable (i.e., defined more completely and deployed more widely), it is
- expected that the URIs used for IPP objects will actually be URLs [RFC2396]. Since every URL is a
- specialized form of a URI, even though the more generic term URI is used throughout the rest of this
- document, its usage is intended to cover the more specific notion of URL as well.
- An administrator configures Printer objects to either support or not support authentication and/or
- message privacy using TLS [TLS] (the mechanism for security configuration is outside the scope of this
- 583 IPP/1.1 document). In some situations, both types of connections (both authenticated and
- unauthenticated) can be established using a single communication channel that has some sort of
- negotiation mechanism. In other situations, multiple communication channels are used, one for each
- type of security configuration. Section 8 provides a full description of all security considerations and
- 587 configurations.
- If a Printer object supports more than one communication channel, some or all of those channels might
- support and/or require different security mechanisms. In such cases, an administrator could expose the
- simultaneous support for these multiple communication channels as multiple URIs for a single Printer
- object where each URI represents one of the communication channels to the Printer object. To support
- this flexibility, the IPP Printer object type defines a multi-valued identification attribute called the
- "printer-uri-supported" attribute. It MUST contain at least one URI. It MAY contain more than one
- URI. That is, every Printer object will have at least one URI that identifies at least one communication
- channel to the Printer object, but it may have more than one URI where each URI identifies a different
- communication channel to the Printer object. The "printer-uri-supported" attribute has a companion
- attribute, the "uri-security-supported" attribute, that has the same cardinality as "printer-uri-supported".
- The purpose of the "uri-security-supported" attribute is to indicate the security mechanisms (if any) used
- for each URI listed in "printer-uri-supported". These two attributes are fully described in sections 4.4.1
- and 4.4.2.
- When a job is submitted to the Printer object via a create request, the client supplies only a single Printer
- object URI. The client supplied Printer object URI MUST be one of the values in the "printer-uri-
- supported" Printer attribute.
- Note: IPP/1.1 does not specify how the client obtains the client supplied URI, but it is
- RECOMMENDED that a Printer object be registered as an entry in a directory service. End-users and
- programs can then interrogate the directory searching for Printers. Section 17 defines a generic schema
- for Printer object entries in the directory service and describes how the entry acts as a bridge to the actual
- 608 IPP Printer object. The entry in the directory that represents the IPP Printer object includes the possibly
- many URIs for that Printer object as values in one its attributes.
- When a client submits a create request to the Printer object, the Printer object validates the request and
- creates a new Job object. The Printer object assigns the new Job object a URI which is stored in the
- "job-uri" Job attribute. This URI is then used by clients as the target for subsequent Job operations. The

- Printer object generates a Job URI based on its configured security policy and the URI used by the client
- in the create request.
- For example, consider a Printer object that supports both a communication channel secured by the use of
- SSL3 (using HTTP over SSL3 with an "https" schemed URI) and another open communication channel
- that is not secured with SSL3 (using a simple "http" schemed URI). If a client were to submit a job
- using the secure URI, the Printer object would assign the new Job object a secure URI as well. If a client
- were to submit a job using the open-channel URI, the Printer would assign the new Job object an open-
- 620 channel URI.
- In addition, the Printer object also populates the Job object's "job-printer-uri" attribute. This is a
- reference back to the Printer object that created the Job object. If a client only has access to a Job
- object's "job-uri" identifier, the client can query the Job's "job-printer-uri" attribute in order to determine
- which Printer object created the Job object. If the Printer object supports more than one URI, the Printer
- object picks the one URI supplied by the client when creating the job to build the value for and to
- populate the Job's "job-printer-uri" attribute.
- Allowing Job objects to have URIs allows for flexibility and scalability. For example, in some
- 628 implementations, the Printer object might create Jobs that are processed in the same local environment
- as the Printer object itself. In this case, the Job URI might just be a composition of the Printer's URI and
- some unique component for the Job object, such as the unique 32-bit positive integer mentioned later in
- this paragraph. In other implementations, the Printer object might be a central clearing-house for
- validating all Job object creation requests, but the Job object itself might be created in some environment
- that is remote from the Printer object. In this case, the Job object's URI may have no physical-location
- relationship at all to the Printer object's URI. Again, the fact that Job objects have URIs allows for
- flexibility and scalability, however, many existing printing systems have local models or interface
- constraints that force print jobs to be identified using only a 32-bit positive integer rather than an
- 637 independent URI. This numeric Job ID is only unique within the context of the Printer object to which
- the create request was originally submitted. Therefore, in order to allow both types of client access to
- 639 IPP Job objects (either by Job URI or by numeric Job ID), when the Printer object successfully processes
- a create request and creates a new Job object, the Printer object MUST generate both a Job URI and a
- Job ID. The Job ID (stored in the "job-id" attribute) only has meaning in the context of the Printer object
- to which the create request was originally submitted. This requirement to support both Job URIs and Job
- IDs allows all types of clients to access Printer objects and Job objects no matter the local constraints
- imposed on the client implementation.
- In addition to identifiers, Printer objects and Job objects have names ("printer-name" and "job-name").
- An object name NEED NOT be unique across all instances of all objects. A Printer object's name is
- chosen and set by an administrator through some mechanism outside the scope of this IPP/1.1 document.
- A Job object's name is optionally chosen and supplied by the IPP client submitting the job. If the client
- does not supply a Job object name, the Printer object generates a name for the new Job object. In all
- cases, the name only has local meaning.

#### To summarize:

651

652

653

- Each Printer object is identified with one or more URIs. The Printer's "printer-uri-supported" attribute contains the URI(s).

- The Printer object's "uri-security-supported" attribute identifies the communication channel security protocols that may or may not have been configured for the various Printer object URIs (e.g., 'tls' or 'none').
  - Each Job object is identified with a Job URI. The Job's "job-uri" attribute contains the URI.
  - Each Job object is also identified with Job ID which is a 32-bit, positive integer. The Job's "job-id" attribute contains the Job ID. The Job ID is only unique within the context of the Printer object which created the Job object.
  - Each Job object has a "job-printer-uri" attribute which contains the URI of the Printer object that was used to create the Job object. This attribute is used to determine the Printer object that created a Job object when given only the URI for the Job object. This linkage is necessary to determine the languages, charsets, and operations which are supported on that Job (the basis for such support comes from the creating Printer object).
  - Each Printer object has a name (which is not necessarily unique). The administrator chooses and sets this name through some mechanism outside the scope of this IPP/1.1 document. The Printer object's "printer-name" attribute contains the name.
  - Each Job object has a name (which is not necessarily unique). The client optionally supplies this name in the create request. If the client does not supply this name, the Printer object generates a name for the Job object. The Job object's "job-name" attribute contains the name.

#### 3. IPP Operations

654

655

656

657

658

659

660

661

662

663

664

665

666

667

668

669

670

671

672

- IPP objects support operations. An operation consists of a request and a response. When a client 673 communicates with an IPP object, the client issues an operation request to the URI for that object. 674 Operation requests and responses have parameters that identify the operation. Operations also have 675 attributes that affect the run-time characteristics of the operation (the intended target, localization 676 information, etc.). These operation-specific attributes are called operation attributes (as compared to 677 object attributes such as Printer object attributes or Job object attributes). Each request carries along 678 with it any operation attributes, object attributes, and/or document data required to perform the 679 operation. Each request requires a response from the object. Each response indicates success or failure 680 of the operation with a status code as a response parameter. The response contains any operation 681 attributes, object attributes, and/or status messages generated during the execution of the operation 682 request. 683
- This section describes the semantics of the IPP operations, both requests and responses, in terms of the parameters, attributes, and other data associated with each operation.

### The IPP/1.1 Printer operations are:

```
Print-Job (section 3.2.1)
Print-URI (section 3.2.2)
Validate-Job (section 3.2.3)
Create-Job (section 3.2.4)
Get-Printer-Attributes (section 3.2.5)
Get-Jobs (section 3.2.6)
Pause-Printer (section 3.3.5)
```

February 17, 1999

```
Resume-Printer (section 3.3.6)
694
          Purge-Jobs (section 3.3.7)
695
696
      The Job operations are:
697
          Send-Document (section 3.3.1)
698
          Send-URI (section 3.3.2)
699
          Cancel-Job (section 3.3.3)
700
          Get-Job-Attributes (section 3.3.4)
701
          Hold-Job (section 3.3.5)
702
          Release-Job (section 3.3.6)
703
          Restart-Job (section 3.3.7)
704
```

The Send-Document and Send-URI Job operations are used to add a new document to an existing multidocument Job object created using the Create-Job operation.

#### 708 3.1 Common Semantics

All IPP operations require some common parameters and operation attributes. These common elements and their semantic characteristics are defined and described in more detail in the following sections.

### 3.1.1 Required Parameters

Every operation request contains the following REQUIRED parameters:

```
- a "version-number",
- an "operation-id",
- a "request-id", and
```

- the attributes that are REQUIRED for that type of request.

717

716

705

Every operation response contains the following REQUIRED parameters:

```
- a "version-number",
- a "status-code",
```

- the "request-id" that was supplied in the corresponding request, and
- the attributes that are REQUIRED for that type of response.

723

727

The "Encoding and Transport document [IPP-PRO] defines special rules for the encoding of these parameters. All other operation elements are represented using the more generic encoding rules for attributes and groups of attributes.

#### 3.1.2 Operation IDs and Request IDs

Each IPP operation request includes an identifying "operation-id" value. Valid values are defined in the "operations-supported" Printer attribute section (see section 4.4.13). The client specifies which operation is being requested by supplying the correct "operation-id" value.

- In addition, every invocation of an operation is identified by a "request-id" value. For each request, the client chooses the "request-id" which MUST be an integer (possibly unique depending on client requirements) in the range from 1 to 2\*\*31 1 (inclusive). This "request-id" allows clients to manage multiple outstanding requests. The receiving IPP object copies all 32-bits of the client-supplied "request-id" attribute into the response so that the client can match the response with the correct outstanding request, even if the "request-id" is out of range. If the request is terminated before the complete "request-id" is received, the IPP object rejects the request and returns a response with a "request-id" of 0.
- Note: In some cases, the transport protocol underneath IPP might be a connection oriented protocol that would make it impossible for a client to receive responses in any order other than the order in which the corresponding requests were sent. In such cases, the "request-id" attribute would not be essential for correct protocol operation. However, in other mappings, the operation responses can come back in any order. In these cases, the "request-id" would be essential.

#### 3.1.3 Attributes

Operation requests and responses are both composed of groups of attributes and/or document data. The attributes groups are:

- Operation Attributes: These attributes are passed in the operation and affect the IPP object's behavior while processing the operation request and may affect other attributes or groups of attributes. Some operation attributes describe the document data associated with the print job and are associated with new Job objects, however most operation attributes do not persist beyond the life of the operation. The description of each operation attribute includes conformance statements indicating which operation attributes are REQUIRED and which are OPTIONAL for an IPP object to support and which attributes a client MUST supply in a request and an IPP object MUST supply in a response.
- Job Template Attributes: These attributes affect the processing of a job. A client OPTIONALLY supplies Job Template Attributes in a create request, and the receiving object MUST be prepared to receive all supported attributes. The Job object can later be queried to find out what Job Template attributes were originally requested in the create request, and such attributes are returned in the response as Job Object Attributes. The Printer object can be queried about its Job Template attributes to find out what type of job processing capabilities are supported and/or what the default job processing behaviors are, though such attributes are returned in the response as Printer Object Attributes. The "ipp-attribute-fidelity" operation attribute affects processing of all client-supplied Job Template attributes (see sections 3.2.1.2 and 16 for a full description of "ipp-attribute-fidelity" and its relationship to other attributes).
- Job Object Attributes: These attributes are returned in response to a query operation directed at a Job object.
- Printer Object Attributes: These attributes are returned in response to a query operation directed at a Printer object.
- Unsupported Attributes: In a create request, the client supplies a set of Operation and Job Template attributes. If any of these attributes or their values is unsupported by the Printer object, the Printer object returns the set of unsupported attributes in the response. Sections 3.2.1.2 and 16 give a full description of how Job Template attributes supplied by the client in a create request are processed by the Printer object and how unsupported attributes are returned to the client.

Because of extensibility, any IPP object might receive a request that contains new or unknown attributes or values for which it has no support. In such cases, the IPP object processes what it can and returns the unsupported attributes in the response.

775 776

773

774

- 777 Later in this section, each operation is formally defined by identifying the allowed and expected groups of attributes for each request and response. The model identifies a specific order for each group in each 778 request or response, but the attributes within each group may be in any order, unless specified otherwise. 779
- Each attribute specification includes the attribute's name followed by the name of its attribute syntax(es) 780 in parenthesizes. In addition, each 'integer' attribute is followed by the allowed range in parentheses, 781 (m:n), for values of that attribute. Each 'text' or 'name' attribute is followed by the maximum size in 782
- octets in parentheses, (size), for values of that attribute. For more details on attribute syntax notation, see 783
- the descriptions of these attributes syntaxes in section 4.1. 784
- Note: Document data included in the operation is not strictly an attribute, but it is treated as a special 785 attribute group for ordering purposes. The only operations that support supplying the document data 786 within an operation request are Print-Job and Send-Document. There are no operation responses that 787
- include document data. 788
- Note: Some operations are REQUIRED for IPP objects to support; the others are OPTIONAL (see 789
- section 5.2.2). Therefore, before using an OPTIONAL operation, a client SHOULD first use the 790
- REQUIRED Get-Printer-Attributes operation to query the Printer's "operations-supported" attribute in 791
- order to determine which OPTIONAL Printer and Job operations are actually supported. The client 792
- SHOULD NOT use an OPTIONAL operation that is not supported. When an IPP object receives a 793
- request to perform an operation it does not support, it returns the 'server-error-operation-not-supported' 794
- status code (see section 14.1.5.2). An IPP object is non-conformant if it does not support a REQUIRED 795
- operation. 796

- 3.1.4 Character Set and Natural Language Operation Attributes
- Some Job and Printer attributes have values that are text strings and names intended for human 798
- understanding rather than machine understanding (see the 'text' and 'name' attribute syntax descriptions 799
- in section 4.1). The following sections describe two special Operation Attributes called "attributes-800
- charset" and "attributes-natural-language". These attributes are always part of the Operation Attributes 801
- group. For most attribute groups, the order of the attributes within the group is not important. However, 802
- for these two attributes within the Operation Attributes group, the order is critical. The "attributes-803
- charset" attribute MUST be the first attribute in the group and the "attributes-natural-language" attribute 804
- MUST be the second attribute in the group. In other words, these attributes MUST be supplied in every 805
- IPP request and response, they MUST come first in the group, and MUST come in the specified order. 806
- For job creation operations, the IPP Printer implementation saves these two attributes with the new Job 807
- object as Job Description attributes. For the sake of brevity in this document, these operation attribute 808
- descriptions are not repeated with every operation request and response, but have a reference back to this 809
- section instead. 810

### 3.1.4.1 Request Operation Attributes

The client MUST supply and the Printer object MUST support the following REQUIRED operation attributes in every IPP/1.1 operation request:

"attributes-charset" (charset):

This operation attribute identifies the charset (coded character set and encoding method) used by any 'text' and 'name' attributes that the client is supplying in this request. It also identifies the charset that the Printer object MUST use (if supported) for all 'text' and 'name' attributes and status messages that the Printer object returns in the response to this request. See Sections 4.1.1 and 4.1.2 for the specification of the 'text' and 'name' attribute syntaxes.

All clients and IPP objects MUST support the 'utf-8' charset [RFC2279] and MAY support additional charsets provided that they are registered with IANA [IANA-CS]. If the Printer object does not support the client supplied charset value, the Printer object MUST reject the request, set the "attributes-charset" to 'utf-8' in the response, and return the 'client-error-charset-not-supported' status code and any 'text' or 'name' attributes using the 'utf-8' charset. The Printer object MUST indicate the charset(s) supported as the values of the "charset-supported" Printer attribute (see Section 4.4.15), so that the client can query to determine which charset(s) are supported.

Note to client implementers: Since IPP objects are only required to support the 'utf-8' charset, in order to maximize interoperability with multiple IPP object implementations, a client may want to supply 'utf-8' in the "attributes-charset" operation attribute, even though the client is only passing and able to present a simpler charset, such as US-ASCII or ISO-8859-1. Then the client will have to filter out (or charset convert) those characters that are returned in the response that it cannot present to its user. On the other hand, if both the client and the IPP objects also support a charset in common besides utf-8, the client may want to use that charset in order to avoid charset conversion or data loss.

See the 'charset' attribute syntax description in Section 4.1.7 for the syntax and semantic interpretation of the values of this attribute and for example values.

"attributes-natural-language" (naturalLanguage):

This operation attribute identifies the natural language used by any 'text' and 'name' attributes that the client is supplying in this request. This attribute also identifies the natural language that the Printer object SHOULD use for all 'text' and 'name' attributes and status messages that the Printer object returns in the response to this request.

There are no REQUIRED natural languages required for the Printer object to support. However, the Printer object's "generated-natural-language-supported" attribute identifies the natural languages supported by the Printer object and any contained Job objects for all text strings generated by the IPP object. A client MAY query this attribute to determine which natural language(s) are supported for generated messages.

For any of the attributes for which the Printer object generates text, i.e., for the "job-state-message", "printer-state-message", and status messages (see Section 3.1.6), the Printer object MUST be able to generate these text strings in any of its supported natural languages. If the client requests a natural language that is not supported, the Printer object MUST return these generated messages in the Printer's configured natural language as specified by the Printer's "natural-language-configured" attribute" (see Section 4.4.16).

For other 'text' and 'name' attributes supplied by the client, authentication system, operator, system administrator, or manufacturer (i.e., for "job-originating-user-name", "printer-name" (name), "printer-location" (text), "printer-info" (text), and "printer-make-and-model" (text)), the Printer object is only required to support the configured natural language of the Printer identified by the Printer object's "natural-language-configured" attribute, though support of additional natural languages for these attributes is permitted.

For any 'text' or 'name' attribute in the request that is in a different natural language than the value supplied in the "attributes-natural-language" operation attribute, the client MUST use the Natural Language Override mechanism (see sections 4.1.1.2 and 4.1.2.2) for each such attribute value supplied. The client MAY use the Natural Language Override mechanism redundantly, i.e., use it even when the value is in the same natural language as the value supplied in the "attributes-natural-language" operation attribute of the request.

The IPP object MUST accept any natural language and any Natural Language Override, whether the IPP object supports that natural language or not (and independent of the value of the "ippattribute-fidelity" Operation attribute). That is the IPP object accepts all client supplied values no matter what the values are in the Printer object's "generated-natural-language-supported" attribute. That attribute, "generated-natural-language-supported", only applies to generated messages, not client supplied messages. The IPP object MUST remember that natural language for all client-supplied attributes, and when returning those attributes in response to a query, the IPP object MUST indicate that natural language.

Each value whose attribute syntax type is 'text' or 'name' (see sections 4.1.1 and 4.1.2) has an Associated Natural-Language. This document does not specify how this association is stored in a Printer or Job object. When such a value is encoded in a request or response, the natural language is either implicit or explicit:

- In the implicit case, the value contains only the text/name value, and the language is specified by the "attributes-natural-language" operation attribute in the request or response (see sections 4.1.1.1 textWithoutLanguage and 4.1.2.1 nameWithoutLanguage).
- In the explicit case (also known as the Natural-Language Override case), the value contains both the language and the text/name value (see sections 4.1.1.2 textWithLanguage and 4.1.2.2 nameWithLanguage).

For example, the "job-name" attribute MAY be supplied by the client in a create request. The text value for this attribute will be in the natural language identified by the "attribute-natural-language" attribute, or if different, as identified by the Natural Language Override mechanism. If supplied, the IPP object will use the value of the "job-name" attribute to populate the Job object's "job-name" attribute. Whenever any client queries the Job object's "job-name" attribute, the IPP object returns the attribute as stored and uses the Natural Language Override mechanism to specify the natural language, if it is different from that reported in the "attributes-natural-language" operation attribute of the response. The IPP object MAY use the Natural Language Override mechanism redundantly, i.e., use it even when the value is in the same natural language as the value supplied in the "attributes-natural-language" operation attribute of the response.

An IPP object MUST NOT reject a request based on a supplied natural language in an "attributes-natural-language" Operation attribute or in any attribute that uses the Natural Language Override.

See the 'naturalLanguage' attribute syntax description in section 4.1.8 for the syntax and semantic interpretation of the values of this attribute and for example values.

Clients SHOULD NOT supply 'text' or 'name' attributes that use an illegal combination of natural language and charset. For example, suppose a Printer object supports charsets 'utf-8', 'iso-8859-1', and 'iso-8859-7'. Suppose also, that it supports natural languages 'en' (English), 'fr' (French), and 'el' (Greek). Although the Printer object supports the charset 'iso-8859-1' and natural language 'el', it probably does not support the combination of Greek text strings using the 'iso-8859-1' charset. The Printer object handles this apparent incompatibility differently depending on the context in which it occurs:

- In a create request: If the client supplies a text or name attribute (for example, the "job-name" operation attribute) that uses an apparently incompatible combination, it is a client choice that does not affect the Printer object or its correct operation. Therefore, the Printer object simply accepts the client supplied value, stores it with the Job object, and responds back with the same combination whenever the client (or any client) queries for that attribute.

-In a query-type operation, like Get-Printer-Attributes: If the client requests an apparently incompatible combination, the Printer object responds (as described in section 3.1.4.2) using the Printer's configured natural language rather than the natural language requested by the client.

In either case, the Printer object does not reject the request because of the apparent incompatibility. The potential incompatible combination of charset and natural language can occur either at the global operation level or at the Natural Language Override attribute-by-attribute level. In addition, since the response always includes explicit charset and natural language information, there is never any question or ambiguity in how the client interprets the response.

936 3.1.4.2 Response Operation Attributes

The Printer object MUST supply and the client MUST support the following REQUIRED operation attributes in every IPP/1.1 operation response:

"attributes-charset" (charset):

This operation attribute identifies the charset used by any 'text' and 'name' attributes that the Printer object is returning in this response. The value in this response MUST be the same value as the "attributes-charset" operation attribute supplied by the client in the request. If this is not possible (i.e., the charset requested is not supported), the request would have been rejected. See "attributes-charset" described in Section 3.1.4.1 above.

If the Printer object supports more than just the 'utf-8' charset, the Printer object MUST be able to code convert between each of the charsets supported on a highest fidelity possible basis in order to return the 'text' and 'name' attributes in the charset requested by the client. However, some information loss MAY occur during the charset conversion depending on the charsets involved. For example, the Printer object may convert from a UTF-8 'a' to a US-ASCII 'a' (with no loss of information), from an ISO Latin 1 CAPITAL LETTER A WITH ACUTE ACCENT to US-ASCII 'A' (losing the accent), or from a UTF-8 Japanese Kanji character to some ISO Latin 1 error character indication such as '?', decimal code equivalent, or to the absence of a character, depending on implementation.

Note: Whether an implementation that supports more than one charset stores the data in the charset supplied by the client or code converts to one of the other supported charsets, depends on implementation. The strategy should try to minimize loss of information during code conversion. On each response, such an implementation converts from its internal charset to that requested.

"attributes-natural-language" (naturalLanguage):

This operation attribute identifies the natural language used by any 'text' and 'name' attributes that the IPP object is returning in this response. Unlike the "attributes-charset" operation attribute, the IPP object NEED NOT return the same value as that supplied by the client in the request. The IPP object MAY return the natural language of the Job object or the Printer's configured natural language as identified by the Printer object's "natural-language-configured" attribute, rather than the natural language supplied by the client. For any 'text' or 'name' attribute or status message in the response that is in a different natural language than the value returned in the "attributes-natural-language" operation attribute, the IPP object MUST use the Natural Language Override mechanism (see sections 4.1.1.2 and 4.1.2.2) on each attribute value returned. The IPP object MAY use the Natural Language Override mechanism redundantly, i.e., use it even when the value is in the same natural language as the value supplied in the "attributes-natural-language" operation attribute of the response.

#### 3.1.5 Operation Targets

All IPP operations are directed at IPP objects. For Printer operations, the operation is always directed at a Printer object using one of its URIs (i.e., one of the values in the Printer object's "printer-uri-supported" attribute). Even if the Printer object supports more than one URI, the client supplies only one URI as the target of the operation. The client identifies the target object by supplying the correct URI in the "printer-uri (uri)" operation attribute.

For Job operations, the operation is directed at either:

- The Job object itself using the Job object's URI. In this case, the client identifies the target object by supplying the correct URI in the "job-uri (uri)" operation attribute.
- The Printer object that created the Job object using both the Printer objects URI and the Job object's Job ID. Since the Printer object that created the Job object generated the Job ID, it MUST be able to correctly associate the client supplied Job ID with the correct Job object. The client supplies the Printer object's URI in the "printer-uri (uri)" operation attribute and the Job object's Job ID in the "job-id (integer(1:MAX))" operation attribute.

If the operation is directed at the Job object directly using the Job object's URI, the client MUST NOT include the redundant "job-id" operation attribute.

The operation target attributes are REQUIRED operation attributes that MUST be included in every operation request. Like the charset and natural language attributes (see section 3.1.4), the operation target attributes are specially ordered operation attributes. In all cases, the operation target attributes immediately follow the "attributes-charset" and "attributes-natural-language" attributes within the operation attribute group, however the specific ordering rules are:

- In the case where there is only one operation target attribute (i.e., either only the "printer-uri" attribute or only the "job-uri" attribute), that attribute MUST be the third attribute in the operation attributes group.
- In the case where Job operations use two operation target attributes (i.e., the "printer-uri" and "jobid" attributes), the "printer-uri" attribute MUST be the third attribute and the "job-id" attribute MUST be the fourth attribute.

In all cases, the target URIs contained within the body of IPP operation requests and responses must be in absolute format rather than relative format (a relative URL identifies a resource with the scope of the HTTP server, but does not include scheme, host or port).

The following rules apply to the use of port numbers in URIs that identify IPP objects:

- 1. If the URI scheme allows the port number to be explicitly included in the URI string, and a port number is specified within the URI, then that port number MUST be used by the client to contact the IPP object.
- 2. If the URI scheme allows the port number to be explicitly included in the URI string, and a port number is not specified within the URI, then default port number implied by that URI scheme MUST be used by the client to contact the IPP object.
- 3. If the URI scheme does not allow an explicit port number to be specified within the URI, then the default port number implied by that URI MUST be used by the client to contact the IPP object.

Note: The IPP "Encoding and Transport document [IPP-PRO] shows a mapping of IPP onto HTTP/1.1 and defines a new default port number for using IPP over HTTP/1.1.

### 3.1.6 Operation Status Codes and Messages

- 1021 Every operation response includes a REQUIRED "status-code" parameter and an OPTIONAL "status-
- message" operation attribute. The "status-code" provides information on the processing of a request. A
- "status-message" attribute provides a short textual description of the status of the operation. The status
- code is intended for use by automata, and the status message is intended for the human end user. If a
- response does include a "status-message" attribute, an IPP client NEED NOT examine or display the
- message, however it SHOULD do so in some implementation specific manner.
- The "status-code" value is a numeric value that has semantic meaning. The "status-code" syntax is
- similar to a "type2 enum" (see section 4.1 on "Attribute Syntaxes") except that values can range only
- from 0x0000 to 0x7FFF. Section 14 describes the status codes, assigns the numeric values, and suggests
- a corresponding status message for each status code. The "status-message" attribute's syntax is
- "text(255)". A client implementation of IPP SHOULD convert status code values into any localized
- message that has semantic meaning to the end user.
- 1033 If the Printer object supports the "status-message" operation attribute, the Printer object MUST be able
- to generate this message in any of the natural languages identified by the Printer object's "generated-
- natural-language-supported" attribute (see the "attributes-natural-language" operation attribute specified
- in section 3.1.4.1). As described in section 3.1.4.1 for any returned 'text' attribute, if there is a choice for
- generating this message, the Printer object uses the natural language indicated by the value of the
- "attributes-natural-language" in the client request if supported, otherwise the Printer object uses the
- value in the Printer object's own "natural-language-configured" attribute. If the Printer object supports
- the "status-message" operation attribute, it SHOULD use the REQUIRED 'utf-8' charset to return a status
- message for the following error status codes (see section 14): 'client-error-bad-request', 'client-error-
- charset-not-supported', 'server-error-internal-error', 'server-error-operation-not-supported', and 'server-
- error-version-not-supported'. In this case, it MUST set the value of the "attributes-charset" operation
- attribute to 'utf-8' in the error response.

#### 1045 3.1.7 Versions

- Each operation request and response carries with it a "version-number" parameter. Each value of the
- "version-number" is in the form "X.Y" where X is the major version number and Y is the minor version
- number. By including a version number in the client request, it allows the client to identify which
- version of IPP it is interested in using. If the IPP object does not support that version, the object
- responds with a status code of 'server-error-version-not-supported' along with the closest version number
- that is supported (see section 14.1.5.4).
- There is no version negotiation per se. However, if after receiving a 'server-error-version-not-supported'
- status code from an IPP object, there is nothing that prevents a client from trying again with a different
- version number. In order to conform to IPP/1.1, an IPP object implementations MUST support versions
- 1055 '1.1' and 1.0.
- There is only one notion of "version number" that covers both IPP Model and IPP Protocol changes.
- Thus the version number MUST change when introducing a new version of the Model and Semantics
- document [IPP-MOD] or a new version of the "Encoding and Transport" document [IPP-PRO].

Changes to the major version number indicate structural or syntactic changes that make it impossible for older version of IPP clients and Printer objects to correctly parse and process the new or changed attributes, operations and responses. If the major version number changes, the minor version numbers is set to zero. As an example, adding the "ipp-attribute-fidelity" attribute (if it had not been part of version '1.1'), would have required a change to the major version number. Items that might affect the changing of the major version number include any changes to the Model and Semantics document [IPP-MOD] or the "Encoding and Transport" document [IPP-PRO] itself, such as:

- reordering of ordered attributes or attribute sets
- changes to the syntax of existing attributes
- changing Operation or Job Template attributes from OPTIONAL to REQUIRED and vice versa
- adding REQUIRED (for an IPP object to support) operation attributes
- adding REQUIRED (for an IPP object to support) operation attribute groups
- adding values to existing operation attributes
  - adding REQUIRED operations

10721073

1074

1075

1076

1077

1078

1079

1080

1081

1082

1083

1084

1085

1086

1087

1088

1066

1067

1068

1069

1070

1071

Changes to the minor version number indicate the addition of new features, attributes and attribute values that may not be understood by all IPP objects, but which can be ignored if not understood. Items that might affect the changing of the minor version number include any changes to the model objects and attributes but not the encoding and transport rules [IPP-PRO] (except adding attribute syntaxes).

Examples of such changes are:

- grouping all extensions not included in a previous version into a new version
- adding new attribute values
- adding new object attributes
- adding OPTIONAL (for an IPP object to support) operation attributes (i.e., those attributes that an IPP object can ignore without confusing clients)
- adding OPTIONAL (for an IPP object to support) operation attribute groups (i.e., those attributes that an IPP object can ignore without confusing clients)
- adding new attribute syntaxes
- adding OPTIONAL operations
- changing Job Description attributes or Printer Description attributes from OPTIONAL to REQUIRED or vice versa.

1089 1090

1091

1092

1093

1094

1095

The encoding of the "version-number" MUST NOT change over any version number (either major or minor). This rule guarantees that all future versions will be backwards compatible with all previous versions (at least for checking the "version-number"). In addition, any protocol elements (attributes, error codes, tags, etc.) that are not carried forward from one version to the next are deprecated so that they can never be reused with new semantics.

Implementations that support a certain major version NEED NOT support ALL previous versions. As each new major version is defined (through the release of a new specification), that major version will specify which previous major versions MUST be supported in compliant implementations.

### 3.1.8 Job Creation Operations

1099

1102

1103

1104 1105

1106

1107

1108

1109 1110

1111

1112

1113

1114

1115

1116

1117

1118 1119

1134

1136

In order to "submit a print job" and create a new Job object, a client issues a create request. A create request is any one of following three operation requests:

- The Print-Job Request: A client that wants to submit a print job with only a single document uses the Print-Job operation. The operation allows for the client to "push" the document data to the Printer object by including the document data in the request itself.
- The Print-URI Request: A client that wants to submit a print job with only a single document (where the Printer object "pulls" the document data instead of the client "pushing" the data to the Printer object) uses the Print-URI operation. In this case, the client includes in the request only a URI reference to the document data (not the document data itself).
- The Create-Job Request: A client that wants to submit a print job with multiple documents uses the Create-Job operation. This operation is followed by an arbitrary number of Send-Document and/or Send-URI operations (each creating another document for the newly create Job object). The Send-Document operation includes the document data in the request (the client "pushes" the document data to the printer), and the Send-URI operation includes only a URI reference to the document data in the request (the Printer "pulls" the document data from the referenced location). The last Send-Document or Send-URI request for a given Job object includes a "last-document" operation attribute set to 'true' indicating that this is the last request.
- Throughout this model specification, the term "create request" is used to refer to any of these three operation requests.
- A Create-Job operation followed by only one Send-Document operation is semantically equivalent to a Print-Job operation, however, for performance reasons, the client SHOULD use the Print-Job operation for all single document jobs. Also, Print-Job is a REQUIRED operation (all implementations MUST support it) whereas Create-Job is an OPTIONAL operation, hence some implementations might not support it.
- Job submission time is the point in time when a client issues a create request. The initial state of every Job object is the 'pending' or 'pending-held' state. Later, the Printer object begins processing the print job. At this point in time, the Job object's state moves to 'processing'. This is known as job processing time. There are validation checks that must be done at job submission time and others that must be performed at job processing time.
- At job submission time and at the time a Validate-Job operation is received, the Printer MUST do the following:
  - 1. Process the client supplied attributes and either accept or reject the request
- 2. Validate the syntax of and support for the scheme of any client supplied URI

At job submission time the Printer object MUST validate whether or not the supplied attributes, attribute syntaxes, and values are supported by matching them with the Printer object's corresponding "xxx-

supported" attributes. See section 3.2.1.2 for details. [IPP-IIG] presents suggested steps for an IPP object to either accept or reject any request and additional steps for processing create requests.

- At job submission time the Printer object NEED NOT perform the validation checks reserved for job processing time such as:
  - 1. Validating the document data
    - 2. Validating the actual contents of any client supplied URI (resolve the reference and follow the link to the document data)

11451146

1147

1148

1149

1150

1151

1152

1154

1155

1143

1144

At job submission time, these additional job processing time validation checks are essentially useless, since they require actually parsing and interpreting the document data, are not guaranteed to be 100% accurate, and MUST be done, yet again, at job processing time. Also, in the case of a URI, checking for availability at job submission time does not guarantee availability at job processing time. In addition, at job processing time, the Printer object might discover any of the following conditions that were not detectable at job submission time:

- runtime errors in the document data,
  - nested document data that is in an unsupported format,
  - the URI reference is no longer valid (i.e., the server hosting the document might be down), or
  - any other job processing error

- At job processing time, since the Printer object has already responded with a successful status code in the response to the create request, if the Printer object detects an error, the Printer object is unable to inform the end user of the error with an operation status code. In this case, the Printer, depending on the error, can set the "job-state", "job-state-reasons", or "job-state-message" attributes to the appropriate value(s) so that later queries can report the correct job status.
- Note: Asynchronous notification of events is outside the scope of this IPP/1.1 document.
- 1164 3.2 Printer Operations
- All Printer operations are directed at Printer objects. A client MUST always supply the "printer-uri" operation attribute in order to identify the correct target of the operation.
- 3.2.1 Print-Job Operation
- This REQUIRED operation allows a client to submit a print job with only one document and supply the document data (rather than just a reference to the data). See Section 16 for the suggested steps for processing create operations and their Operation and Job Template attributes.
- 1171 3.2.1.1 Print-Job Request
- The following groups of attributes are supplied as part of the Print-Job Request:

#### Group 1: Operation Attributes

### Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.1. The Printer object MUST copy these values to the corresponding Job Description attributes described in sections 4.3.23 and 4.3.24.

#### 1179 Target:

 The "printer-uri" (uri) operation attribute which is the target for this operation as described in section 3.1.5.

### Requesting User Name:

The "requesting-user-name" (name(MAX)) attribute SHOULD be supplied by the client as described in section 8.3.

### "job-name" (name(MAX)):

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. It contains the client supplied Job name. If this attribute is supplied by the client, its value is used for the "job-name" attribute of the newly created Job object. The client MAY automatically include any information that will help the end-user distinguish amongst his/her jobs, such as the name of the application program along with information from the document, such as the document name, document subject, or source file name. If this attribute is not supplied by the client, the Printer generates a name to use in the "job-name" attribute of the newly created Job object (see Section 4.3.5).

#### "ipp-attribute-fidelity" (boolean):

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. The value 'true' indicates that total fidelity to client supplied Job Template attributes and values is required, else the Printer object MUST reject the Print-Job request. The value 'false' indicates that a reasonable attempt to print the Job object is acceptable and the Printer object MUST accept the Print-job request. If not supplied, the Printer object assumes the value is 'false'. All Printer objects MUST support both types of job processing. See section 16 for a full description of "ipp-attribute-fidelity" and its relationship to other attributes, especially the Printer object's "pdl-override-supported" attribute.

#### "document-name" (name(MAX)):

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. It contains the client supplied document name. The document name MAY be different than the Job name. Typically, the client software automatically supplies the document name on behalf of the end user by using a file name or an application generated name. If this attribute is supplied, its value can be used in a manner defined by each implementation. Examples include: printed along with the Job (job start sheet, page adornments, etc.), used by accounting or resource tracking management tools, or even stored along with the document as a document level attribute. IPP/1.1 does not support the concept of document level attributes.

February 17, 1999

"document-format" (mimeMediaType):

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. The value of this attribute identifies the format of the supplied document data. If the client does not supply this attribute, the Printer object assumes that the document data is in the format defined by the Printer object's "document-format-default" attribute. If the client supplies this attribute, but the value is not supported by the Printer object, i.e., the value is not one of the values of the Printer object's "document-format-supported" attribute, the Printer object MUST reject the request and return the 'client-error-document-format-not-supported' status code.

122412251226

1227

1228

1229

1217

1218

1219

1220

1221

1222

1223

### "document-natural-language" (naturalLanguage):

The client OPTIONALLY supplies this attribute. The Printer object OPTIONALLY supports this attribute. This attribute specifies the natural language of the document for those document-formats that require a specification of the natural language in order to image the document unambiguously. There are no particular values required for the Printer object to support.

1230 1231 1232

1233

1234

1235

1236

1237

1238

1239

1240

1241

1242

1243

1244

1245

1246

1247

## "compression" (type3 keyword)

The client OPTIONALLY supplies this attribute. The Printer object OPTIONALLY supports this attribute and the "compression-supported" attribute (see section 4.4.29). The client supplied "compression" operation attribute identifies the compression algorithm used on the document data. If the client omits this attribute, the Printer object MUST assume that the data is not compressed. If the client supplies the attribute and the Printer object supports the attribute, the Printer object uses the corresponding decompression algorithm on the document data. If the client supplies this attribute, but the value is not supported by the Printer object, i.e., the value is not one of the values of the Printer object's "compression-supported" attribute, the Printer object MUST copy the attribute and its value to the Unsupported Attributes response group, reject the request, and return the 'client-error-attributes-or-values-not-supported' status code. If the client supplies this attribute, but this attribute is not supported by the Printer object, i.e., the "compression-supported" attribute is not one of the Printer's Printer Description attributes, the Printer object MUST copy the attribute to the Unsupported Attributes response group changing the value to the out-of-band 'unsupported' value (see section 4.1), reject the request, and return the 'client-error-attributes-or-values-not-supported' status code. See section 3.2.1.2 for returning unsupported attributes and values.

1248 1249 1250

1251

1252

1253

1254

1255

## "job-k-octets" (integer(0:MAX))

The client OPTIONALLY supplies this attribute. The Printer object OPTIONALLY supports this attribute and the "job-k-octets-supported" attribute (see section 4.4.30). The client supplied "job-k-octets" operation attribute identifies the total size of the document(s) in K octets being submitted (see section 4.3.17 for the complete semantics). If the client supplies the attribute and the Printer object supports the attribute, the value of the attribute is used to populate the Job object's "job-k-octets" Job Description attribute.

1256 1257 1258

1259

1260

1261

Note: For this attribute and the following two attributes ("job-impressions", and "job-media-sheets"), if the client supplies the attribute, but the Printer object does not support the attribute, the Printer object ignores the client-supplied value. If the client supplies the attribute and the Printer supports the attribute, and the value is within the range of the corresponding Printer

object's "xxx-supported" attribute, the Printer object MUST use the value to populate the Job object's "xxx" attribute. If the client supplies the attribute and the Printer supports the attribute, but the value is outside the range of the corresponding Printer object's "xxx-supported" attribute, the Printer object MUST copy the attribute and its value to the Unsupported Attributes response group, reject the request, and return the 'client-error-attributes-or-values-not-supported' status code. If the client does not supply the attribute, the Printer object MAY choose to populate the corresponding Job object attribute depending on whether the Printer object supports the attribute and is able to calculate or discern the correct value.

### "job-impressions" (integer(0:MAX))

The client OPTIONALLY supplies this attribute. The Printer object OPTIONALLY supports this attribute and the "job-impressions-supported" attribute (see section 4.4.31). The client supplied "job-impressions" operation attribute identifies the total size in number of impressions of the document(s) being submitted (see section 4.3.18 for the complete semantics).

See note under "job-k-octets".

### "job-media-sheets" (integer(0:MAX))

The client OPTIONALLY supplies this attribute. The Printer object OPTIONALLY supports this attribute and the "job-media-sheets-supported" attribute (see section 4.4.32). The client supplied "job-media-sheets" operation attribute identifies the total number of media sheets to be produced for this job (see section 4.3.19 for the complete semantics).

See note under "job-k-octets".

#### Group 2: Job Template Attributes

The client OPTIONALLY supplies a set of Job Template attributes as defined in section 4.2. If the client is not supplying any Job Template attributes in the request, the client SHOULD omit Group 2 rather than sending an empty group. However, a Printer object MUST be able to accept an empty group.

#### Group 3: Document Content

The client MUST supply the document data to be processed.

Note: In addition to the MANDATORY parameters required for every operation request, the simplest Print-Job Request consists of just the "attributes-charset" and "attributes-natural-language" operation attributes; the "printer-uri" target operation attribute; the Document Content and nothing else. In this simple case, the Printer object:

- creates a new Job object (the Job object contains a single document),
- stores a generated Job name in the "job-name" attribute in the natural language and charset requested (see Section 3.1.4.1) (if those are supported, otherwise using the Printer object's default natural language and charset), and

- at job processing time, uses its corresponding default value attributes for the supported Job
Template attributes that were not supplied by the client as IPP attribute or embedded instructions in the document data.

#### 3.2.1.2 Print-Job Response

The Printer object MUST return to the client the following sets of attributes as part of the Print-Job Response:

\_

### Group 1: Operation Attributes

### Status Message:

In addition to the REQUIRED status code returned in every response, the response OPTIONALLY includes a "status-message" (text) operation attribute as described in sections 14 and 3.1.6. If the client supplies unsupported or conflicting Job Template attributes or values, the Printer object MUST reject or accept the Print-Job request depending on the whether the client supplied a 'true' or 'false' value for the "ipp-attribute-fidelity" operation attribute. See the Implementer's Guide [IPP-IIG] for a complete description of the suggested steps for processing a create request.

### Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.2.

#### Group 2: Unsupported Attributes

This is a set of Operation and Job Template attributes supplied by the client (in the request) that are not supported by the Printer object or that conflict with one another (see the Implementer's Guide [IPP-IIG]). If the Printer object is not returning any Unsupported Attributes in the response, the Printer object SHOULD omit Group 2 rather than sending an empty group. However, a client MUST be able to accept an empty group.

Unsupported attributes fall into three categories:

- 1. The Printer object does not support the supplied attribute (no matter what the attribute syntax or value).
- 2. The Printer object does support the attribute, but does not support some or all of the particular attribute syntaxes or values supplied by the client (i.e., the Printer object does not have those attribute syntaxes or values in its corresponding "xxx-supported" attribute).
- 3. The Printer object does support the attributes and values supplied, but the particular values are in conflict with one another, because they violate a constraint, such as not being able to staple transparencies.

In the case of an unsupported attribute name, the Printer object returns the client-supplied attribute with a substituted "out-of-band" value of 'unsupported' indicating no support for the attribute itself (see the beginning of section 4.1).

In the case of a supported attribute with one or more unsupported attribute syntaxes or values, the Printer object simply returns the client-supplied attribute with the unsupported attribute syntaxes or values as supplied by the client. This indicates support for the attribute, but no support for that particular attribute syntax or value. If the client supplies a multi-valued attribute with more than one value and the Printer object supports the attribute but only supports a subset of the client-supplied attribute syntaxes or values, the Printer object MUST return only those attribute syntaxes or values that are unsupported.

In the case of two (or more) supported attribute values that are in conflict with one another (although each is supported independently, the values conflict when requested together within the same job), the Printer object MUST return all the values that it ignores or substitutes to resolve the conflict, but not any of the values that it is still using. The choice for exactly how to resolve the conflict is implementation dependent. See The Implementer's Guide [IPP-IIG] for an example.

In these three cases, the value of the "ipp-attribute-fidelity" supplied by the client does not affect what the Printer object returns. The value of "ipp-attribute-fidelity" only affects whether the Print-Job operation is accepted or rejected. If the job is accepted, the client may query the job using the Get-Job-Attributes operation requesting the unsupported attributes that were returned in the create response to see which attributes were ignored (not stored on the Job object) and which attributes were stored with other (substituted) values.

#### Group 3: Job Object Attributes

"job-uri" (uri):

The Printer object MUST return the Job object's URI by returning the contents of the REQUIRED "job-uri" Job object attribute. The client uses the Job object's URI when directing operations at the Job object. The Printer object always uses its configured security policy when creating the new URI. However, if the Printer object supports more than one URI, the Printer object also uses information about which URI was used in the Print-Job Request to generated the new URI so that the new URI references the correct access channel. In other words, if the Print-Job Request comes in over a secure channel, the Printer object MUST generate a Job URI that uses the secure channel as well.

#### "job-id" (integer(1:MAX)):

The Printer object MUST return the Job object's Job ID by returning the REQUIRED "job-id" Job object attribute. The client uses this "job-id" attribute in conjunction with the "printer-uri" attribute used in the Print-Job Request when directing Job operations at the Printer object.

"job-state":

The Printer object MUST return the Job object's REQUIRED "job-state" attribute. The value of this attribute (along with the value of the next attribute "job-state-reasons") is taken from a "snapshot" of the new Job object at some meaningful point in time (implementation defined) between when the Printer object receives the Print-Job Request and when the Printer object returns the response.

1391 "job-state-reasons":

The Printer object OPTIONALLY returns the Job object's OPTIONAL "job-state-reasons" attribute. If the Printer object supports this attribute then it MUST be returned in the response. If this attribute is not returned in the response, the client can assume that the "job-state-reasons" attribute is not supported and will not be returned in a subsequent Job object query.

"job-state-message":

The Printer object OPTIONALLY returns the Job object's OPTIONAL "job-state-message" attribute. If the Printer object supports this attribute then it MUST be returned in the response. If this attribute is not returned in the response, the client can assume that the "job-state-message" attribute is not supported and will not be returned in a subsequent Job object query.

"number-of-intervening-jobs":

The Printer object OPTIONALLY returns the Job object's OPTIONAL "number-of-intervening-jobs" attribute. If the Printer object supports this attribute then it MUST be returned in the response. If this attribute is not returned in the response, the client can assume that the "number-of-intervening-jobs" attribute is not supported and will not be returned in a subsequent Job object query.

Note: Since any printer state information which affects a job's state is reflected in the "job-state" and "job-state-reasons" attributes, it is sufficient to return only these attributes and no specific printer status attributes.

Note: In addition to the MANDATORY parameters required for every operation response, the simplest response consists of the just the "attributes-charset" and "attributes-natural-language" operation attributes and the "job-uri", "job-id", and "job-state" Job Object Attributes. In this simplest case, the status code is "successful-ok" and there is no "status-message" operation attribute.

### 3.2.2 Print-URI Operation

This OPTIONAL operation is identical to the Print-Job operation (section 3.2.1) except that a client supplies a URI reference to the document data using the "document-uri" (uri) operation attribute (in Group 1) rather than including the document data itself. Before returning the response, the Printer MUST validate that the Printer supports the retrieval method (e.g., http, ftp, etc.) implied by the URI, and MUST check for valid URI syntax. If the client-supplied URI scheme is not supported, i.e. the value is not in the Printer object's "referenced-uri-scheme-supported" attribute, the Printer object MUST reject the request and return the 'client-error-uri-scheme-not-supported' status code. See The Implementer's

February 17, 1999

- Guide [IPP-IIG] for suggested additional checks. The Printer NEED NOT follow the reference and
- validate the contents of the reference.
- 1429 If the Printer object supports this operation, it MUST support the "reference-uri-schemes-supported"
- 1430 Printer attribute (see section 4.4.24).
- 1431 It is up to the IPP object to interpret the URI and subsequently "pull" the document from the source
- referenced by the URI string.
- 1433 3.2.3 Validate-Job Operation
- This REQUIRED operation is similar to the Print-Job operation (section 3.2.1) except that a client
- supplies no document data and the Printer allocates no resources (i.e., it does not create a new Job
- object). This operation is used only to verify capabilities of a printer object against whatever attributes
- are supplied by the client in the Validate-Job request. By using the Validate-Job operation a client can
- validate that an identical Print-Job operation (with the document data) would be accepted. The Validate-
- Job operation also performs the same security negotiation as the Print-Job operation (see section 8), so
- that a client can check that the client and Printer object security requirements can be met before
- performing a Print-Job operation.
- Note: The Validate-Job operation does not accept a "document-uri" attribute in order to allow a client to
- check that the same Print-URI operation will be accepted, since the client doesn't send the data with the
- Print-URI operation. The client SHOULD just issue the Print-URI request.
- The Printer object returns the same status codes, Operation Attributes (Group 1) and Unsupported
- Attributes (Group 2) as the Print-Job operation. However, no Job Object Attributes (Group 3) are
- returned, since no Job object is created.
- 1448 3.2.4 Create-Job Operation
- This OPTIONAL operation is similar to the Print-Job operation (section 3.2.1) except that in the Create-
- Job request, a client does not supply document data or any reference to document data. Also, the client
- does not supply any of the "document-name", "document-format", "compression", or "document-natural-
- language" operation attributes. This operation is followed by one or more Send-Document or Send-URI
- operations. In each of those operation requests, the client OPTIONALLY supplies the "document-
- name", "document-format", and "document-natural-language" attributes for each document in the multi-
- document Job object.
- 1456 If a Printer object supports the Create-Job operation, it MUST also support the Send-Document
- operation and also MAY support the Send-URI operation.
- 1458 If the Printer object supports this operation, it MUST support the "multiple-operation-time-out" Printer
- attribute (see section 4.4.28).

# 3.2.5 Get-Printer-Attributes Operation

- This REQUIRED operation allows a client to request the values of the attributes of a Printer object. In
- the request, the client supplies the set of Printer attribute names and/or attribute group names in which
- the requester is interested. In the response, the Printer object returns a corresponding attribute set with
- the appropriate attribute values filled in.
- For Printer objects, the possible names of attribute groups are:
- 'job-template': all of the Job Template attributes that apply to a Printer object (the last two columns of the table in Section 4.2).
  - 'printer-description': the attributes specified in Section 4.4.
  - 'all': the special group 'all' that includes all supported attributes.

1469 1470

1468

- Since a client MAY request specific attributes or named groups, there is a potential that there is some
- overlap. For example, if a client requests, 'printer-name' and 'all', the client is actually requesting the
- "printer-name" attribute twice: once by naming it explicitly, and once by inclusion in the 'all' group. In
- such cases, the Printer object NEED NOT return each attribute only once in the response even if it is
- requested multiple times. The client SHOULD NOT request the same attribute in multiple ways.
- 1476 It is NOT REQUIRED that a Printer object support all attributes belonging to a group (since some
- attributes are OPTIONAL). However, it is REQUIRED that each Printer object support all group names.
- 1478 3.2.5.1 Get-Printer-Attributes Request
- The following sets of attributes are part of the Get-Printer-Attributes Request:
- 1480 Group 1: Operation Attributes
- Natural Language and Character Set:
  - The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.1.

1484 1485

1482

1483

The "printer-uri" (uri) operation attribute which is the target for this operation as described in section 3.1.5.

1488

1489 Requesting User Name:

Target:

The "requesting-user-name" (name(MAX)) attribute SHOULD be supplied by the client as described in section 8.3.

1491 1492 1493

1494

1495

1496

1497

1490

"requested-attributes" (1setOf keyword):

The client OPTIONALLY supplies a set of attribute names and/or attribute group names in whose values the requester is interested. The Printer object MUST support this attribute. If the client omits this attribute, the Printer MUST respond as if this attribute had been supplied with a value of 'all'.

"document-format" (mimeMediaType):

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. This attribute is useful for a Printer object to determine the set of supported attribute values that relate to the requested document format. The Printer object MUST return the attributes and values that it uses to validate a job on a create or Validate-Job operation in which this document format is supplied. The Printer object SHOULD return only (1) those attributes that are supported for the specified format and (2) the attribute values that are supported for the specified document format. By specifying the document format, the client can get the Printer object to eliminate the attributes and values that are not supported for a specific document format. For example, a Printer object might have multiple interpreters to support both 'application/postscript' (for PostScript) and 'text/plain' (for text) documents. However, for only one of those interpreters might the Printer object be able to support "number-up" with values of '1', '2', and '4'. For the other interpreter it might be able to only support "number-up" with a value of '1'. Thus a client can use the Get-Printer-Attributes operation to obtain the attributes and values that will be used to accept/reject a create job operation.

If the Printer object does not distinguish between different sets of supported values for each different document format when validating jobs in the create and Validate-Job operations, it MUST NOT distinguish between different document formats in the Get-Printer-Attributes operation. If the Printer object does distinguish between different sets of supported values for each different document format specified by the client, this specialization applies only to the following Printer object attributes:

- Printer attributes that are Job Template attributes ("xxx-default" "xxx-supported", and "xxx-ready" in the Table in Section 4.2),
- "pdl-override-supported",
- "compression-supported",
- "job-k-octets-supported",
- "job-impressions-supported,
- "job-media-sheets-supported"
- "printer-driver-installer",
- "color-supported", and
- "reference-uri-schemes-supported"

The values of all other Printer object attributes (including "document-format-supported") remain invariant with respect to the client supplied document format (except for new Printer description attribute as registered according to section 6.2).

If the client omits this "document-format" operation attribute, the Printer object MUST respond as if the attribute had been supplied with the value of the Printer object's "document-format-default" attribute. It is recommended that the client always supply a value for "document-format", since the Printer object's "document-format-default" may be 'application/octet-stream', in which case the returned attributes and values are for the union of the document formats that

the Printer can automatically sense. For more details, see the description of the 'mimeMediaType' attribute syntax in section 4.1.9.

If the client supplies a value for the "document-format" Operation attribute that is not supported by the Printer, i.e., is not among the values of the Printer object's "document-format-supported" attribute, the Printer object MUST reject the operation and return the 'client-error-document-format-not-supported' status code.

### 3.2.5.2 Get-Printer-Attributes Response

The Printer object returns the following sets of attributes as part of the Get-Printer-Attributes Response:

### 1552 Group 1: Operation Attributes

### Status Message:

In addition to the REQUIRED status code returned in every response, the response OPTIONALLY includes a "status-message" (text) operation attribute as described in section 3.1.6.

# Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.2.

# Group 2: Unsupported Attributes

This is a set of Operation attributes supplied by the client (in the request) that are not supported by the Printer object or that conflict with one another (see sections 3.2.1.2 and 16). The response NEED NOT contain the "requested-attributes" operation attribute with any supplied values (attribute keywords) that were requested by the client but are not supported by the IPP object. If the Printer object is not returning any Unsupported Attributes in the response, the Printer object SHOULD omit Group 2 rather than sending an empty group. However, a client MUST be able to accept an empty group.

# Group 3: Printer Object Attributes

This is the set of requested attributes and their current values. The Printer object ignores (does not respond with) any requested attribute which is not supported. The Printer object MAY respond with a subset of the supported attributes and values, depending on the security policy in force. However, the Printer object MUST respond with the 'unknown' value for any supported attribute (including all REQUIRED attributes) for which the Printer object does not know the value. Also the Printer object MUST respond with the 'no-value' for any supported attribute (including all REQUIRED attributes) for which the system administrator has not configured a value. See the description of the "out-of-band" values in the beginning of Section 4.1.

3.2.6 Get-Jobs Operation

- This REQUIRED operation allows a client to retrieve the list of Job objects belonging to the target
- Printer object. The client may also supply a list of Job attribute names and/or attribute group names. A
- group of Job object attributes will be returned for each Job object that is returned.
- This operation is similar to the Get-Job-Attributes operation, except that this Get-Jobs operation returns
- attributes from possibly more than one object (see the description of Job attribute group names in section
- 1587 3.3.4).
- 1588 3.2.6.1 Get-Jobs Request
- The client submits the Get-Jobs request to a Printer object.
- The following groups of attributes are part of the Get-Jobs Request:
- 1591 Group 1: Operation Attributes
- Natural Language and Character Set:
  - The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.1.
- 1596 Target:

1593

15941595

1597

1598 1599

1600

1601

1602 1603

1604

1605

1606

1607

1608

1609

1610 1611

1612

1613

1614

1615

1616

1617

The "printer-uri" (uri) operation attribute which is the target for this operation as described in section 3.1.5.

Requesting User Name:

The "requesting-user-name" (name(MAX)) attribute SHOULD be supplied by the client as described in section 8.3.

"limit" (integer(1:MAX)):

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. It is an integer value that indicates a limit to the number of Job objects returned. The limit is a "stateless limit" in that if the value supplied by the client is 'N', then only the first 'N' jobs are returned in the Get-Jobs Response. There is no mechanism to allow for the next 'M' jobs after the first 'N' jobs. If the client does not supply this attribute, the Printer object responds with all applicable jobs.

"requested-attributes" (1setOf keyword):

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. It is a set of Job attribute names and/or attribute groups names in whose values the requester is interested. This set of attributes is returned for each Job object that is returned. The allowed attribute group names are the same as those defined in the Get-Job-Attributes operation in section 3.3.4. If the client does not supply this attribute, the Printer MUST respond as if the client had supplied this attribute with two values: 'job-uri' and 'job-id'.

"which-jobs" (keyword):

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. It indicates which Job objects MUST be returned by the Printer object. The values for this attribute are:

162316241625

1621

1622

'completed': This includes any Job object whose state is 'completed', 'canceled', or 'aborted'. 'not-completed': This includes any Job object whose state is 'pending', 'processing', 'processing-stopped', or 'pending-held'.

1627 1628 1629

1626

A Printer object MUST support both values. However, if the implementation does not keep jobs in the 'completed', 'canceled', and 'aborted' states, then it returns no jobs when the 'completed' value is supplied.

163116321633

1630

If a client supplies some other value, the Printer object MUST copy the attribute and the unsupported value to the Unsupported Attributes response group, reject the request, and return the 'client-error-attributes-or-values-not-supported' status code.

1635 1636 1637

1634

If the client does not supply this attribute, the Printer object MUST respond as if the client had supplied the attribute with a value of 'not-completed'.

163816391640

1641

1642

1643

1644

"my-jobs" (boolean):

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. It indicates whether all jobs or just the jobs submitted by the requesting user of this request MUST be returned by the Printer object. If the client does not supply this attribute, the Printer object MUST respond as if the client had supplied the attribute with a value of 'false', i.e., all jobs. The means for authenticating the requesting user and matching the jobs is described in section 8.

1645 1646

1647

### 3.2.6.2 Get-Jobs Response

The Printer object returns all of the Job objects that match the criteria as defined by the attribute values supplied by the client in the request. It is possible that no Job objects are returned since there may literally be no Job objects at the Printer, or there may be no Job objects that match the criteria supplied by the client. If the client requests any Job attributes at all, there is a set of Job Object Attributes returned for each Job object.

1653 Group 1: Operation Attributes

Status Message:

In addition to the REQUIRED status code returned in every response, the response OPTIONALLY includes a "status-message" (text) operation attribute as described in sections 14 and 3.1.6.

165716581659

1660

1661

1654

1655

1656

Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.2.

# Group 2: Unsupported Attributes

This is a set of Operation attributes supplied by the client (in the request) that are not supported by the Printer object or that conflict with one another (see sections 3.2.1.2 and the Implementer's Guide [IPP-IIG]). The response NEED NOT contain the "requested-attributes" operation attribute with any supplied values (attribute keywords) that were requested by the client but are not supported by the IPP object. If the Printer object is not returning any Unsupported Attributes in the response, the Printer object SHOULD omit Group 2 rather than sending an empty group. However, a client MUST be able to accept an empty group.

# Groups 3 to N: Job Object Attributes

The Printer object responds with one set of Job Object Attributes for each returned Job object. The Printer object ignores (does not respond with) any requested attribute or value which is not supported or which is restricted by the security policy in force, including whether the requesting user is the user that submitted the job (job originating user) or not (see section 8). However, the Printer object MUST respond with the 'unknown' value for any supported attribute (including all REQUIRED attributes) for which the Printer object does not know the value, unless it would violate the security policy. See the description of the "out-of-band" values in the beginning of Section 4.1.

### Jobs are returned in the following order:

- If the client requests all 'completed' Jobs (Jobs in the 'completed', 'aborted', or 'canceled' states), then the Jobs are returned newest to oldest (with respect to actual completion time)
- If the client requests all 'not-completed' Jobs (Jobs in the 'pending', 'processing', 'pending-held', and 'processing-stopped' states), then Jobs are returned in relative chronological order of expected time to complete (based on whatever scheduling algorithm is configured for the Printer object).

### 3.2.7 Pause-Printer Operation

This OPTIONAL operation allows a client to stop the Printer object from scheduling jobs on all its devices. Depending on implementation, the Pause-Printer operation MAY also stop the Printer from processing the current job or jobs. Any job that is currently being printed is either stopped as soon as the implementation permits or is completed, depending on implementation. The Printer object MUST still accept create operations to create new jobs, but MUST prevent any jobs from entering the 'processing' state.

If the Pause-Printer operation is supported, then the Resume-Printer operation MUST be supported, and vice-versa.

- The IPP Printer stops the current job(s) on its device(s) that were in the 'processing' or 'processing-
- stopped' states as soon as the implementation permits. If the implementation supports the "printer-state-
- reasons" attribute and the devices will take appreciable time to stop, the IPP Printer adds the 'moving-to-
- paused' value to the Printer object's "printer-state-reasons" attribute (see section 4.4.11). When the
- device(s) have all stopped, the IPP Printer transitions the Printer object to the 'stopped' state, removes the
- 'moving-to-paused' value, if present, and adds the 'paused' value to the Printer object's "printer-state-
- 1706 reasons" attribute.
- When the current job(s) complete that were in the 'processing' state, the IPP Printer transitions them to
- the 'completed' state. When the current job(s) stop in mid processing that were in the 'processing' state,
- the IPP Printer transitions them to the 'processing-stopped' state and, if the "job-state-reasons" attribute is
- supported, adds the 'printer-stopped' value to the job's "job-state-reasons" attribute.
- Note: for any jobs that are 'pending' or 'pending-held', the 'printer-stopped' value of the jobs' "job-state-
- reasons" attribute also applies. However, the IPP Printer NEED NOT update those jobs' "job-state-
- reasons" attributes and only need return the 'printer-stopped' value when those jobs are queried (so-called
- "lazy evaluation").
- Whether the Pause-Printer operation affects jobs that were submitted to the device from other sources
- than the IPP Printer object in the same way that the Pause-Printer operation affects jobs that were
- submitted to the IPP Printer object using IPP, depends on implementation, i.e., on whether the IPP
- protocol is being used as a universal management protocol or just to manage IPP jobs, respectively.

The IPP Printer MUST accept the request in any state and transition the Printer to the indicated new "printer-state" before returning as follows:

Current "printer-state"	New "printer-state"	"printer- state- reasons"	IPP Printer's response status code and action:
'idle'	'stopped'	'paused'	'successful-ok'
'processing'	'processing'	'moving-to- paused'	OPTION 1: 'successful-ok'; Later, when all output has stopped, the "printer-state" becomes 'stopped', and the 'paused' value replaces the 'moving-to-paused' value in the "printer-state-reasons" attribute
'processing'	'stopped'	'paused'	OPTION 2: 'successful-ok'; all device output stopped immediately
'stopped'	'stopped'	'paused'	'successful-ok'

- 1721 Access Rights: The requesting user must be an operator or administrator of the Printer object.
- Otherwise, the IPP Printer MUST reject the operation and return: 'client-error-forbidden', 'client-error-
- not-authenticated', or 'client-error-not-authorized' as appropriate.
- 3.2.7.1 Pause-Printer Request
- The following groups of attributes are part of the Pause-Printer Request:

1726	Group 1: Operation Attributes
1727 1728 1729 1730	Natural Language and Character Set:  The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.1.
1731 1732 1733	Target:  The "printer-uri" (uri) operation attribute which is the target for this operation as described in section 3.1.5.
1734 1735 1736 1737	Requesting User Name:  The "requesting-user-name" (name(MAX)) attribute SHOULD be supplied by the client as described in section 8.3.
1738	3.2.7.2 Pause-Printer Response
1739	The following groups of attributes are part of the Pause-Printer Response:
1740	Group 1: Operation Attributes
1741 1742 1743 1744 1745	Status Message: In addition to the REQUIRED status code returned in every response, the response OPTIONALLY includes a "status-message" (text) operation attribute as described in section 3.1.6.
1745 1746 1747 1748 1749	Natural Language and Character Set:  The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.2.
1750	Group 2: Unsupported Attributes
1751 1752	This is a set of Operation attributes supplied by the client (in the request) that are not supported by the Printer object or that conflict with one another (see sections 3.2.1.2 and 16).
1753	3.2.8 Resume-Printer Operation
1754 1755 1756 1757 1758 1759	This operation allows a client to resume the Printer object scheduling jobs on all its devices. If the Printer object supports the "printer-state-reasons" attribute, it MUST remove the 'paused' and 'moving-to-paused' values from the Printer object's "printer-state-reasons" attribute, if present. If there are no other reasons to keep a device paused (such as media-jam), the IPP Printer transitions itself to the 'processing' or 'idle' states, depending on whether there are jobs to be processed or not, respectively, and the device(s) resume processing jobs.
1760 1761	If the Pause-Printer operation is supported, then the Resume-Printer operation MUST be supported, and vice-versa.
1762	The IPP Printer removes the 'printer-stopped' value from any job's "job-state-reasons" attributes

contained in that Printer.

The IPP Printer MUST accept the request in any state, transition the Printer object to the indicated new state as follows:

Current	New "printer-state"	IPP Printer's response status code and action:
"printer-state"		
'idle'	'idle'	'successful-ok'
'processing'	'processing'	'successful-ok'
'stopped'	'processing'	'successful-ok';
		when there are jobs to be processed
'stopped'	'idle'	'successful-ok';
		when there are no jobs to be processed.

- Access Rights: The requesting user must be an operator or administrator of the Printer object.
- Otherwise, the IPP Printer MUST reject the operation and return: 'client-error-forbidden', 'client-error-
- not-authenticated', or 'client-error-not-authorized' as appropriate.
- The Resume-Printer Request and Resume-Printer Response have the same attribute groups and attributes as the Pause-Printer operation (see sections 3.2.7.1 and 3.2.7.2).
- 3.2.9 Purge-Jobs Operation
- 1772 This OPTIONAL operation allows a client to remove all jobs from an IPP Printer object, regardless of
- their job states, including jobs in the Printer object's Job History (see Section 4.3.7.1). After a Purge-
- Jobs operation has been performed, a Printer object MUST return no jobs in subsequent Get-Job-
- 1775 Attributes and Get-Jobs responses (until new jobs are submitted).
- Whether the Purge-Jobs (and Get-Jobs) operation affects jobs that were submitted to the device from
- other sources than the IPP Printer object in the same way that the Purge-Jobs operation affects jobs that
- were submitted to the IPP Printer object using IPP, depends on implementation, i.e., on whether the IPP
- protocol is being used as a universal management protocol or just to manage IPP jobs, respectively.
- Note: if an operator wants to cancel all jobs without clearing out the Job History, the operator uses the
- 1781 Cancel-Job operation on each job instead of using the Purge-Job operation.
- The Printer object MUST accept this operation in any state and transition the Printer object to the 'idle'
- 1783 state.
- Access Rights: The requesting user must be an operator or administrator of the Printer object.
- Otherwise, the IPP object MUST reject the operation and return: client-error-forbidden, client-error-not-
- authenticated, and client-error-not-authorized as appropriate.
- The Purge-Jobs Request and Purge-Jobs Response have the same attribute groups and attributes as the
- Pause-Printer operation (see sections 3.2.7.1 and 3.2.7.2).

# 1789 3.3 Job Operations

- All Job operations are directed at Job objects. A client MUST always supply some means of identifying
- the Job object in order to identify the correct target of the operation. That job identification MAY either
- be a single Job URI or a combination of a Printer URI with a Job ID. The IPP object implementation
- MUST support both forms of identification for every job.

### 3.3.1 Send-Document Operation

- This OPTIONAL operation allows a client to create a multi-document Job object that is initially "empty"
- 1796 (contains no documents). In the Create-Job response, the Printer object returns the Job object's URI (the
- "job-uri" attribute) and the Job object's 32-bit identifier (the "job-id" attribute). For each new document
- that the client desires to add, the client uses a Send-Document operation. Each Send-Document Request
- contains the entire stream of document data for one document.
- Since the Create-Job and the send operations (Send-Document or Send-URI operations) that follow
- could occur over an arbitrarily long period of time for a particular job, a client MUST send another send
- operation within an IPP Printer defined minimum time interval after the receipt of the previous request
- for the job. If a Printer object supports multiple document jobs, the Printer object MUST support the
- "multiple-operation-time-out" attribute (see section 4.4.28). This attribute indicates the minimum
- number of seconds the Printer object will wait for the next send operation before taking some recovery
- 1806 action.

1807

1808

1809

1810

1811

1812

1813

1814

1815

1816

1817

1818

1819

1820

1821

1822

1823

1794

An IPP object MUST recover from an errant client that does not supply a send operation, sometime after the minimum time interval specified by the Printer object's "multiple-operation-time-out" attribute. Such recovery MAY include any of the following or other recovery actions:

- 1. Assume that the Job is an invalid job, start the process of changing the job state to 'aborted', add the 'aborted-by-system' value to the job's "job-state-reasons" attribute (see section 4.3.8), if supported, and clean up all resources associated with the Job. In this case, if another send operation is finally received, the Printer responds with an "client-error-not-possible" or "client-error-not-found" depending on whether or not the Job object is still around when the send operation finally arrives.
- 2. Assume that the last send operation received was in fact the last document (as if the "last-document" flag had been set to 'true'), close the Job object, and proceed to process it (i.e., move the Job's state to 'pending').
- 3. Assume that the last send operation received was in fact the last document, close the Job, but move it to the 'pending-held' and add the 'submission-interrupted' value to the job's "job-state-reasons" attribute (see section 4.3.8), if supported. This action allows the user or an operator to determine whether to continue processing the Job by moving it back to the 'pending' state using the Release-Job operation (see section 3.3.6) or to cancel the job using the Cancel-Job operation (see section 3.3.3).

1824 1825

1826

1827

Each implementation is free to decide the "best" action to take depending on local policy, whether any documents have been added, whether the implementation spools jobs or not, and/or any other piece of

information available to it. If the choice is to abort the Job object, it is possible that the Job object may already have been processed to the point that some media sheet pages have been printed.

# 3.3.1.1 Send-Document Request

The following attribute sets are part of the Send-Document Request:

# 1832 Group 1: Operation Attributes

### Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.1.

# Target:

 Either (1) the "printer-uri" (uri) plus "job-id" (integer(1:MAX))or (2) the "job-uri" (uri) operation attribute(s) which define the target for this operation as described in section 3.1.5.

# Requesting User Name:

The "requesting-user-name" (name(MAX)) attribute SHOULD be supplied by the client as described in section 8.3.

### "document-name" (name(MAX)):

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. It contains the client supplied document name. The document name MAY be different than the Job name. It might be helpful, but NEED NOT be unique across multiple documents in the same Job. Typically, the client software automatically supplies the document name on behalf of the end user by using a file name or an application generated name. See the description of the "document-name" operation attribute in the Print-Job Request (section 3.2.1.1) for more information about this attribute.

# "document-format" (mimeMediaType):

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. The value of this attribute identifies the format of the supplied document data. If the client does not supply this attribute, the Printer object assumes that the document data is in the format defined by the Printer object's "document-format-default" attribute. If the client supplies this attribute, but the value is not supported by the Printer object, i.e., the value is not one of the values of the Printer object's "document-format-supported" attribute, the Printer object MUST reject the request and return the 'client-error-document-format-not-supported' status code.

### "document-natural-language" (naturalLanguage):

The client OPTIONALLY supplies this attribute. The Printer object OPTIONALLY supports this attribute. This attribute specifies the natural language of the document for those document-formats that require a specification of the natural language in order to image the document unambiguously. There are no particular values required for the Printer object to support.

deBry, Hastings, Herriot, Isaacson, Powell

"compression" (type3 keyword)

The client OPTIONALLY supplies this attribute. The Printer object OPTIONALLY supports this attribute and the "compression-supported" attribute (see section 4.4.29). The client supplied "compression" operation attribute identifies the compression algorithm used on the document data. If the client omits this attribute, the Printer object MUST assume that the data is not compressed. If the client supplies the attribute and the Printer object supports the attribute, the Printer object MUST use the corresponding decompression algorithm on the document data. If the client supplies this attribute, but the value is not supported by the Printer object, i.e., the value is not one of the values of the Printer object's "compression-supported" attribute, the Printer object MUST copy the attribute and its value to the Unsupported Attributes response group, reject the request, and return the 'client-error-attributes-or-values-not-supported' status code.

"last-document" (boolean):

The client MUST supply this attribute. The Printer object MUST support this attribute. It is a boolean flag that is set to 'true' if this is the last document for the Job, 'false' otherwise.

# **Group 2: Document Content**

The client MUST supply the document data if the "last-document" flag is set to 'false'. However, since a client might not know that the previous document sent with a Send-Document (or Send-URI) operation was the last document (i.e., the "last-document" attribute was set to 'false'), it is legal to send a Send-Document request with no document data where the "last-document" flag is set to 'true'. Such a request MUST NOT increment the value of the Job object's "number-of-documents" attribute, since no real document was added to the job.

# 3.3.1.2 Send-Document Response

The following sets of attributes are part of the Send-Document Response:

## Group 1: Operation Attributes

Status Message:

In addition to the REQUIRED status code returned in every response, the response OPTIONALLY includes a "status-message" (text) operation attribute as described in sections 14 and 3.1.6.

Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.2.

### Group 2: Unsupported Attributes

This is a set of Operation attributes supplied by the client (in the request) that are not supported by the Printer object or that conflict with one another (see sections 3.2.1.2 and the Implementer's Guide [IPP-IIG]). If the Printer object is not returning any Unsupported Attributes in the response, the Printer object SHOULD omit Group 2 rather than sending an empty group. However, a client MUST be able to accept an empty group.

1310

- Group 3: Job Object Attributes
- This is the same set of attributes as described in the Print-Job response (see section 3.2.1.2).

1913

- 1914 3.3.2 Send-URI Operation
- This OPTIONAL operation is identical to the Send-Document operation (see section 3.3.1) except that a
- client MUST supply a URI reference ("document-uri" operation attribute) rather than the document data
- itself. If a Printer object supports this operation, clients can use both Send-URI or Send-Document
- operations to add new documents to an existing multi-document Job object. However, if a client needs
- to indicate that the previous Send-URI or Send-Document was the last document, the client MUST use
- the Send-Document operation with no document data and the "last-document" flag set to 'true' (rather
- than using a Send-URI operation with no "document-uri" operation attribute).
- 1922 If a Printer object supports this operation, it MUST also support the Print-URI operation (see section
- 1923 3.2.2).
- The Printer object MUST validate the syntax and URI scheme of the supplied URI before returning a
- response, just as in the Print-URI operation.
- 1926 3.3.3 Cancel-Job Operation
- This REQUIRED operation allows a client to cancel a Print Job from the time the job is created up to the
- time it is completed, canceled, or aborted. Since a Job might already be printing by the time a Cancel-
- Job is received, some media sheet pages might be printed before the job is actually terminated.
- 1930 3.3.3.1 Cancel-Job Request
- The following groups of attributes are part of the Cancel-Job Request:
- 1932 Group 1: Operation Attributes
- 1933 Natural Language and Character Set:
  - The "attributes-charset" and "attributes-natural-language" attributes as described in section
- 1935 3.1.4.1.

1936

1934

- 1937 Target:
- Either (1) the "printer-uri" (uri) plus "job-id" (integer(1:MAX))or (2) the "job-uri" (uri)
- operation attribute(s) which define the target for this operation as described in section 3.1.5.
- 1941 Requesting User Name:
- The "requesting-user-name" (name(MAX)) attribute SHOULD be supplied by the client as described in section 8.3.

1944

"message" (text(127)):

The client OPTIONALLY supplies this attribute. The Printer object OPTIONALLY supports this attribute. It is a message to the operator. This "message" attribute is not the same as the "job-message-from-operator" attribute. That attribute is used to report a message from the operator to the end user that queries that attribute. This "message" operation attribute is used to send a message from the client to the operator along with the operation request. It is an implementation decision of how or where to display this message to the operator (if at all).

### 3.3.3.2 Cancel-Job Response

The following sets of attributes are part of the Cancel-Job Response:

## Group 1: Operation Attributes

### Status Message:

In addition to the REQUIRED status code returned in every response, the response OPTIONALLY includes a "status-message" (text) operation attribute as described in sections 14 and 3.1.6.

If the job is already in the 'completed', 'aborted', or 'canceled' state, or the 'process-to-stop-point' value is set in the Job's "job-state-reasons" attribute, the Printer object MUST reject the request and return the 'client-error-not-possible' error status code.

### Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.2.

### Group 2: Unsupported Attributes

This is a set of Operation attributes supplied by the client (in the request) that are not supported by the Printer object or that conflict with one another (see section 3.2.1.2 and the Implementer's Guide [IPP-IIG]). If the Printer object is not returning any Unsupported Attributes in the response, the Printer object SHOULD omit Group 2 rather than sending an empty group. However, a client MUST be able to accept an empty group.

Once a successful response has been sent, the implementation guarantees that the Job will eventually end up in the 'canceled' state. Between the time of the Cancel-Job operation is accepted and when the job enters the 'canceled' job-state (see section 4.3.7), the "job-state-reasons" attribute SHOULD contain the 'processing-to-stop-point 'value which indicates to later queries that although the Job might still be 'processing', it will eventually end up in the 'canceled' state, not the 'completed' state.

# 3.3.4 Get-Job-Attributes Operation

This REQUIRED operation allows a client to request the values of attributes of a Job object and it is almost identical to the Get-Printer-Attributes operation (see section 3.2.5). The only differences are that the operation is directed at a Job object rather than a Printer object, there is no "document-format" operation attribute used when querying a Job object, and the returned attribute group is a set of Job object attributes rather than a set of Printer object attributes.

For Jobs, the possible names of attribute groups are:

- job-template': all of the Job Template attributes that apply to a Job object (the first column of the table in Section 4.2).
- 'job-description': all of the Job Description attributes specified in Section 4.3.
- 'all': the special group 'all' that includes all supported attributes.

Since a client MAY request specific attributes or named groups, there is a potential that there is some overlap. For example, if a client requests, job-name' and job-description', the client is actually requesting the "job-name" attribute once by naming it explicitly, and once by inclusion in the job-description' group. In such cases, the Printer object NEED NOT return the attribute only once in the response even if it is requested multiple times. The client SHOULD NOT request the same attribute in multiple ways.

- It is NOT REQUIRED that a Job object support all attributes belonging to a group (since some attributes are OPTIONAL). However it is REQUIRED that each Job object support all group names.
- 2001 3.3.4.1 Get-Job-Attributes Request
- The following groups of attributes are part of the Get-Job-Attributes Request when the request is directed at a Job object:
- 2004 Group 1: Operation Attributes
- Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.1.

2009 Target:

Either (1) the "printer-uri" (uri) plus "job-id" (integer(1:MAX)) or (2) the "job-uri" (uri) operation attribute(s) which define the target for this operation as described in section 3.1.5.

2013 Requesting User Name:

The "requesting-user-name" (name(MAX)) attribute SHOULD be supplied by the client as described in section 8.3.

2008

2010

20112012

2014

2015

1988

1989

1990

"requested-attributes" (1setOf keyword):

The client OPTIONALLY supplies this attribute. The IPP object MUST support this attribute. It is a set of attribute names and/or attribute group names in whose values the requester is interested. If the client omits this attribute, the IPP object MUST respond as if this attribute had been supplied with a value of 'all'.

### 3.3.4.2 Get-Job-Attributes Response

The Printer object returns the following sets of attributes as part of the Get-Job-Attributes Response:

### Group 1: Operation Attributes

## Status Message:

In addition to the REQUIRED status code returned in every response, the response OPTIONALLY includes a "status-message" (text) operation attribute as described in sections 14 and 3.1.6.

# Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.2. The "attributes-natural-language" MAY be the natural language of the Job object, rather than the one requested.

### Group 2: Unsupported Attributes

This is a set of Operation attributes supplied by the client (in the request) that are not supported by the Printer object or that conflict with one another (see sections 3.2.1.2 and the Implementer's Guide [IPP-IIG]). The response NEED NOT contain the "requested-attributes" operation attribute with any supplied values (attribute keywords) that were requested by the client but are not supported by the IPP object. If the Printer object is not returning any Unsupported Attributes in the response, the Printer object SHOULD omit Group 2 rather than sending an empty group. However, a client MUST be able to accept an empty group.

### Group 3: Job Object Attributes

This is the set of requested attributes and their current values. The IPP object ignores (does not respond with) any requested attribute or value which is not supported or which is restricted by the security policy in force, including whether the requesting user is the user that submitted the job (job originating user) or not (see section 8). However, the IPP object MUST respond with the 'unknown' value for any supported attribute (including all REQUIRED attributes) for which the IPP object does not know the value, unless it would violate the security policy. See the description of the "out-of-band" values in the beginning of Section 4.1.

February 17, 1999

# 3.3.5 Hold-Job Operation

2053

2067

2068

2069

2070

2071

2075

This OPTIONAL operation allows a client to hold a pending job in the queue so that it is not eligible for scheduling. If the Hold-Job operation is supported, then the Release-Job operation MUST be supported, and vice-versa. The OPTIONAL "job-hold-until" operation attribute allows a client to specify whether to hold the job indefinitely or until a specified time period, if supported.

The IPP object MUST accept or reject the request based on the job's current state and transition the job to the indicated new state as follows:

Current "job-state"	New "job-state"	IPP object's response status code and action:	
'pending'	'pending-held'	'successful-ok' See Note 1	
'pending'	'pending'	'successful-ok' See Note 2	
'pending-held'	'pending-held'	'successful-ok' See Note 1	
'pending-held'	'pending'	'successful-ok' See Note 2	
'processing' 'processing'		'client-error-not-possible'	
'processing-stopped'	'processing-stopped'	'client-error-not-possible'	
'completed'	'completed'	'client-error-not-possible'	
'canceled'	'canceled'	'client-error-not-possible'	
'aborted'	'aborted'	'client-error-not-possible'	

Note 1: If the OPTIONAL "job-state-reasons" attribute is supported and if the implementation supports multiple reasons for a job to be in the 'pending-held' state, the IPP object MUST add the 'job-hold-until-specified' value to the job's "job-state-reasons" attribute.

Note 2: If the IPP object supports the "job-hold-until" operation attribute, but the specified time period has already started (or is the 'no-hold' value) and there are no other reasons to hold the job, the IPP object MUST make the job be a candidate for processing immediately (see Section 4.2.2) by putting the job in the 'pending' state.

Note: In order to keep the Hold-Job operation simple, such a request is rejected when the job is in the 'processing' or 'processing-stopped' states. If an operation is needed to hold jobs while in these states, it will be added as an additional operation, rather than overloading the Hold-Job operation. Then it is clear to clients by querying the Printer object's "operations-supported" (see Section 4.4.13) and the Job object's "job-state" (see Section 4.3.7) attributes which operations are possible.

Access Rights: The requesting user must either be the submitter of the job or an operator or administrator of the Printer object (see Section 1). Otherwise, the IPP object MUST reject the operation and return: 'client-error-forbidden', 'client-error-not-authenticated', or 'client-error-not-authorized' as appropriate.

### 3.3.5.1 Hold-Job Request

The groups and operation attributes are the same as for a Cancel-Job request (see section 3.3.3.1), with the addition of the following Group 1 Operation attribute:

"job-hold-until" (type3 keyword | name(MAX)):

2079

2080

2081

2082

2083

2084

2085

2086

2087

2088

2089

2090

2091

2092

2093

2094

2095

2096

2097

2098

2099

2100

2101

2102

The client OPTIONALLY supplies this Operation attribute. The IPP object MUST support this operation attribute in a Hold-Job request, if it supports the "job-hold-until" Job template attribute in create operations. See section 4.2.2. The IPP object SHOULD support the "job-hold-until" Job Template attribute for use in job create operations with at least the 'indefinite' value, if it supports the Hold-Job operation. Otherwise, a client cannot create a job and hold it immediately (without picking some supported time period in the future).

If supplied and supported as specified in the Printer's "job-hold-until-supported" attribute, the IPP object copies the supplied operation attribute to the Job object, replacing the job's previous "job-hold-until" attribute, if present, and makes the job a candidate for scheduling during the supplied named time period.

If supplied, but either the "job-hold-until" Operation attribute itself or the value supplied is not supported, the IPP object accepts the request, returns the unsupported attribute or value in the Unsupported Attributes Group according to section 3.2.1.2, returns the 'successful-ok-ignored-or-substituted-attributes, and holds the job indefinitely until a client performs a subsequent Release-Job operation.

If the client (1) supplies a value that specifies a time period that has already started or the 'no-hold' value (meaning don't hold the job) and (2) the IPP object supports the "job-hold-until" operation attribute and there are no other reasons to hold the job, the IPP object MUST accept the operation and make the job be a candidate for processing immediately (see Section 4.2.2).

If the client does not supply a "job-hold-until" Operation attribute in the request, the IPP object MUST populate the job object with a "job-hold-until" attribute with the 'indefinite' value (if IPP object supports the "job-hold-until" attribute) and hold the job indefinitely, until a client performs a Release-Job operation.

### 3.3.5.2 Hold-Job Response

The groups and attributes are the same as for a Cancel-Job response (see section 3.3.3.2).

#### 2104 3.3.6 Release-Job Operation

- This OPTIONAL operation allows a client to release a previously held job so that it is again eligible for scheduling. If the Hold-Job operation is supported, then the Release-Job operation MUST be supported,
- 2107 and vice-versa.
- This operation removes the "job-hold-until" job attribute, if present, from the job object that had been
- supplied in the create or most recent Hold-Job or Restart-Job operation and remove its effect on the job.
- 2110 If the OPTIONAL "job-state-reasons" attribute is supported, the IPP object MUST remove the "job-hold-
- until-specified' value from the job's "job-state-reasons" attribute, if present. See section 4.3.8.
- The IPP object MUST accept or reject the request based on the job's current state and transition the job
- 2113 to the indicated new state as follows:

February 17, 1999

Current "job-state"	New "job-state"	IPP object's response status code and action:	
'pending'	'pending'	'successful-ok' No effect on the job.	
'pending-held'	'pending-held'	'successful-ok' See Note 1	
'pending-held'	'pending'	'successful-ok'	
'processing'	'processing'	'successful-ok' No effect on the job.	
'processing-stopped'	'processing-stopped'	'successful-ok' No effect on the job.	
'completed'	'completed'	'client-error-not-possible'	
'canceled'	'canceled'	'client-error-not-possible'	
'aborted'	'aborted'	'client-error-not-possible'	

- Note 1: If there are other reasons to keep the job in the 'pending-held' state, such as 'resources-are-not-
- ready', the job remains in the 'pending-held' state. Thus the 'pending-held' state is not just for jobs that
- 2116 have the 'job-hold-until' applied to them, but are for any reason to keep the job from being a candidate
- for scheduling and processing, such as 'resources-are-not-ready'. See the "job-hold-until" attribute
- 2118 (section 4.2.2).
- 2119 Access Rights: The requesting user must either be the submitter of the job or an operator or administrator
- of the Printer object. Otherwise, the IPP object MUST reject the operation and return: 'client-error-
- 2121 forbidden', 'client-error-not-authenticated', or 'client-error-not-authorized' as appropriate.
- The Release-Job Request and Release-Job Response have the same attribute groups and attributes as the
- Cancel-Job operation (see section 3.3.3.1 and 3.3.3.2).
- 2124 3.3.7 Restart-Job Operation
- 2125 This OPTIONAL operation allows a client to restart a job that is retained in the queue after processing
- has completed (see section 4.3.7.1).
- The job is moved to the 'pending' job state and restarts at the beginning on the same IPP Printer object
- with the same attribute values. The Job Description attributes that accumulate job progress, such as
- "job-impressions-completed", "job-media-sheets-completed", and "job-k-octets-processed", MUST be
- reset to 0 so that they give an accurate record of the job from its restart point. The job object MUST
- continue to use the same "job-uri" and "job-id" attribute values.
- Note: If in the future an operation is needed that does not reset the job progress attributes, then a new
- operation will be defined which makes a copy of the job, assigns a new "job-uri" and "job-id" to the copy
- and resets the job progress attributes in the new copy only.
- The IPP object MUST accept or reject the request based on the job's current state, transition the job to
- 2136 the indicated new state as follows:

Current "job-state"	New "job-state"	IPP object's response status code and action:	
'pending'	'pending'	'client-error-not-possible'.	
'pending-held' 'pending-held'		'client-error-not-possible'.	

Current "job-state"	New "job-state"	IPP object's response status code and action:	
'processing'	'processing'	'client-error-not-possible'.	
'processing-stopped'			
'completed'	'pending'	'successful-ok' - job is started over.	
'completed'	'completed'	'client-error-not-possible' - see Note 1	
'canceled'	'pending'	'successful-ok' - job is started over.	
'canceled'	'canceled'	'client-error-not-possible' - see Note 1	
'aborted'	'pending'	'successful-ok' - job is started over.	
'aborted'	'aborted'	'client-error-not-possible' - see Note 1	

2139

2148

2149

2150

2151

2152

2153

2154

2155

2156

2157

2158

2159

2160

2161

2162

2163

Note 1: If the Job Retention Period has expired for the job in this state, then the IPP object rejects the operation. See section 4.3.7.1.

Note: In order to prevent a user from inadvertently restarting a job in the middle, the Restart-Job request is rejected when the job is in the 'processing' or 'processing-stopped' states. If in the future an operation is needed to hold or restart jobs while in these states, it will be added as an additional operation, rather than overloading the Restart-Job operation, so that it is clear that the user intended that the current job not be completed.

Access Rights: The requesting user must either be the submitter of the job or an operator or administrator of the Printer object. Otherwise, the IPP object MUST reject the operation and return: 'client-error-forbidden', 'client-error-not-authenticated', or 'client-error-not-authorized' as appropriate.

### 3.3.7.1 Restart-Job Request

The groups and attributes are the same as for a Cancel-Job request (see section 3.3.3.1), with the addition of the following Group 1 Operation attribute:

"job-hold-until" (type3 keyword | name(MAX)):

The client OPTIONALLY supplies this attribute. The IPP object MUST support this Operation attribute in a Restart-Job request, if it supports the "job-hold-until" Job Template attribute in create operations. See section 4.2.2. Otherwise, the IPP object NEED NOT support the "job-hold-until" Operation attribute in a Restart-Job request.

If supplied and supported as specified in the Printer's "job-hold-until-supported" attribute, the IPP object copies the supplied Operation attribute to the Job object, replacing the job's previous "job-hold-until" attribute, if present, and makes the job a candidate for scheduling during the supplied named time period. See section 4.2.2.

If supplied, but the value is not supported, the IPP object accepts the request, returns the unsupported attribute or value in the Unsupported Attributes Group according to section 3.2.1.2, returns the 'successful-ok-ignored-or-substituted-attributes' status code, and holds the job indefinitely until a client performs a subsequent Release-Job operation.

2164	If supplied, but the "job-hold-until" Operation attribute itself is not supported, the IPP object
2165	accepts the request, returns the unsupported attribute with the out-of-band 'unsupported' value in
2166	the Unsupported Attributes Group according to section 3.2.1.2, returns the 'successful-ok-
2167	ignored-or-substituted-attributes' status code, and restarts the job, i.e., ignores the "job-hold-
2168	until" attribute.
2169	If the client (1) supplies a value that specifies a time period that has already started or the 'no-
2170	hold' value (meaning don't hold the job) and (2) the IPP object supports the "job-hold-until"
2171	operation attribute and there are no other reasons to hold the job, the IPP object makes the job a
2172	candidate for processing immediately (see Section 4.2.2).
2173	If the client does not supply a "job-hold-until" operation attribute in the request, the IPP object
2174	removes the "job-hold-until" attribute, if present, from the job. If there are no other reasons to
2175	hold the job, the Restart-Job operation makes the job a candidate for processing immediately (see
2176	Section 4.2.2).

- 2177 3.3.7.2 Restart-Job Response
- The groups and attributes are the same as for a Cancel-Job response (see section 3.3.3.2).
- Note: In the future an OPTIONAL Modify-Job operation may be specified that allows the client to modify other attributes before releasing the restarted job.
- 4. Object Attributes

2194

- This section describes the attributes with their corresponding attribute syntaxes and values that are part of the IPP model. The sections below show the objects and their associated attributes which are included within the scope of this protocol. Many of these attributes are derived from other relevant specifications:
- Document Printing Application (DPA) [ISO10175]
  - RFC 1759 Printer MIB [RFC1759]

Each attribute is uniquely identified in this document using a "keyword" (see section 13.2.1) which is the name of the attribute. The keyword is included in the section header describing that attribute.

Note: Not only are keywords used to identify attributes, but one of the attribute syntaxes described below is "keyword" so that some attributes have keyword values. Therefore, these attributes are defined as having an attribute syntax that is a set of keywords.

- 4.1 Attribute Syntaxes
- This section defines the basic attribute syntax types that all clients and IPP objects MUST be able to accept in responses and accept in requests, respectively. Each attribute description in sections 3 and

- 3.3.5 includes the name of attribute syntax(es) in the heading (in parentheses). A conforming
- implementation of an attribute MUST include the semantics of the attribute syntax(es) so identified.
- Section 6.3 describes how the protocol can be extended with new attribute syntaxes.
- The attribute syntaxes are specified in the following sub-sections, where the sub-section heading is the
- keyword name of the attribute syntax inside the single quotes. In operation requests and responses each
- 2202 attribute value MUST be represented as one of the attribute syntaxes specified in the sub-section heading
- for the attribute. In addition, the value of an attribute in a response (but not in a request) MAY be one of
- 2204 the "out-of-band" values. Standard "out-of-band" values are:
- 2205 'unknown': The attribute is supported by the IPP object, but the value is unknown to the IPP object for some reason.
- 2207 'unsupported': The attribute is unsupported by the IPP object. This value MUST be returned only as
  2208 the value of an attribute in the Unsupported Attributes Group.
  - 'no-value': The attribute is supported by the Printer object, but the administrator has not yet configured a value.
- The "Encoding and Transport" specification [IPP-PRO] defines mechanisms for passing "out-of-band"
- values. All attributes in a request MUST have one or more values as defined in Sections 4.2 to 4.4.
- Thus clients MUST NOT supply attributes with "out-of-band" values. All attributes in a response
- MUST have one or more values as defined in Sections 4.2 to 4.4 or a single "out-of-band" value.
- 2216 Most attributes are defined to have a single attribute syntax. However, a few attributes (e.g., "job-sheet",
- "media", "job-hold-until") are defined to have several attribute syntaxes, depending on the value. These
- multiple attribute syntaxes are separated by the "|" character in the sub-section heading to indicate the
- choice. Since each value MUST be tagged as to its attribute syntax in the protocol, a single-valued
- 2220 attribute instance may have any one of its attribute syntaxes and a multi-valued attribute instance may
- have a mixture of its defined attribute syntaxes.
- 2222 4.1.1 'text'

2210

- A text attribute is an attribute whose value is a sequence of zero or more characters encoded in a
- maximum of 1023 ('MAX') octets. MAX is the maximum length for each value of any text attribute.
- However, if an attribute will always contain values whose maximum length is much less than MAX, the
- definition of that attribute will include a qualifier that defines the maximum length for values of that
- 2227 attribute. For example: the "printer-location" attribute is specified as "printer-location (text(127))". In
- this case, text values for "printer-location" MUST NOT exceed 127 octets; if supplied with a longer text
- string via some external interface (other than the protocol), implementations are free to truncate to this
- shorter length limitation.
- In this specification, all text attributes are defined using the 'text' syntax. However, 'text' is used only for
- brevity; the formal interpretation of 'text' is: 'textWithoutLanguage | textWithLanguage'. That is, for any
- 2233 attribute defined in this specification using the 'text' attribute syntax, all IPP objects and clients MUST
- support both the 'textWithoutLanguage' and 'textWithLanguage' attribute syntaxes. However, in actual

- usage and protocol execution, objects and clients accept and return only one of the two syntax per attribute. The syntax 'text' never appears "on-the-wire".
- Both 'textWithoutLanguage' and 'textWithLanguage' are needed to support the real world needs of
- interoperability between sites and systems that use different natural languages as the basis for human
- communication. Generally, one natural language applies to all text attributes in a given request or
- response. The language is indicated by the "attributes-natural-language" operation attribute defined in
- section 3.1.4 or "attributes-natural-language" job attribute defined in section 4.3.24, and there is no need
- 2242 to identify the natural language for each text string on a value-by-value basis. In these cases, the
- 2243 attribute syntax 'textWithoutLanguage' is used for text attributes. In other cases, the client needs to
- supply or the Printer object needs to return a text value in a natural language that is different from the
- rest of the text values in the request or response. In these cases, the client or Printer object uses the
- 2246 attribute syntax 'textWithLanguage' for text attributes (this is the Natural Language Override mechanism
- described in section 3.1.4).
- The 'textWithoutLanguage' and 'textWithLanguage' attribute syntaxes are described in more detail in the
- following sections.
- 2250 4.1.1.1 'textWithoutLanguage'
- The 'textWithoutLanguage' syntax indicates a value that is sequence of zero or more characters. Text
- strings are encoded using the rules of some charset. The Printer object MUST support the UTF-8
- charset [RFC2279] and MAY support additional charsets to represent 'text' values, provided that the
- charsets are registered with IANA [IANA-CS]. See Section 4.1.7 for the specification of the 'charset'
- 2255 attribute syntax, including restricted semantics and examples of charsets.
- 2256 4.1.1.2 'textWithLanguage'
- The 'textWithLanguage' attribute syntax is a compound attribute syntax consisting of two parts: a
- 2258 'textWithoutLanguage' part plus an additional 'naturalLanguage' (see section 4.1.8) part that overrides the
- natural language in force. The 'naturalLanguage' part explicitly identifies the natural language that
- applies to the text part of that value and that value alone. For any give text attribute, the
- 2261 'textWithoutLanguage' part is limited to the maximum length defined for that attribute, but the
- 2262 'naturalLanguage' part is always limited to 63 octets. Using the 'textWithLanguage' attribute syntax rather
- than the normal 'textWithoutLanguage' syntax is the so-called Natural Language Override mechanism
- and MUST be supported by all IPP objects and clients.
- 2265 If the attribute is multi-valued (1setOf text), then the 'textWithLanguage' attribute syntax MUST be used
- 2266 to explicitly specify each attribute value whose natural language needs to be overridden. Other values in
- a multi-valued 'text' attribute in a request or a response revert to the natural language of the operation
- 2268 attribute.
- In a create request, the Printer object MUST accept and store with the Job object any natural language in
- the "attributes-natural-language" operation attribute, whether the Printer object supports that natural
- language or not. Furthermore, the Printer object MUST accept and store any 'textWithLanguage'

- 2272 attribute value, whether the Printer object supports that natural language or not. These requirements are
- independent of the value of the "ipp-attribute-fidelity" operation attribute that the client MAY supply.
- Example: If the client supplies the "attributes-natural-language" operation attribute with the value: 'en'
- indicating English, but the value of the "job-name" attribute is in French, the client MUST use the
- 2276 'textWithLanguage' attribute syntax with the following two values:
- 2277 'fr': Natural Language Override indicating French
- 2278 'Rapport Mensuel': the job name in French

- See the "Encoding and Transport" document [IPP-PRO] for a detailed example of the
- ²textWithLanguage' attribute syntax.
- 2282 4.1.2 'name'
- This syntax type is used for user-friendly strings, such as a Printer name, that, for humans, are more
- meaningful than identifiers. Names are never translated from one natural language to another. The
- 2285 'name' attribute syntax is essentially the same as 'text', including the REQUIRED support of UTF-8
- except that the sequence of characters is limited so that its encoded form MUST NOT exceed 255
- 2287 (MAX) octets.
- Also like 'text', 'name' is really an abbreviated notation for either 'nameWithoutLanguage' or
- 2289 'nameWithLanguage'. That is, all IPP objects and clients MUST support both the
- 2290 'nameWithoutLanguage' and 'nameWithLanguage' attribute syntaxes. However, in actual usage and
- protocol execution, objects and clients accept and return only one of the two syntax per attribute. The
- syntax 'name' never appears "on-the-wire".
- Note: Only the 'text' and 'name' attribute syntaxes permit the Natural Language Override mechanism.
- Some attributes are defined as 'type3 keyword | name'. These attributes support values that are either
- 2295 type3 keywords or names. This dual-syntax mechanism enables a site administrator to extend these
- 2296 attributes to legally include values that are locally defined by the site administrator. Such names are not
- registered with IANA.
- 2298 4.1.2.1 'nameWithoutLanguage'
- The nameWithoutLanguage' syntax indicates a value that is sequence of zero or more characters so that
- 2300 its encoded form does not exceed MAX octets.
- 4.1.2.2 'nameWithLanguage'
- The 'nameWithLanguage' attribute syntax is a compound attribute syntax consisting of two parts: a
- 'nameWithoutLanguage' part plus an additional 'naturalLanguage' (see section 4.1.8) part that overrides
- 2304 the natural language in force. The 'naturalLanguage' part explicitly identifies the natural language that
- applies to that name value and that name value alone.

- The 'nameWithLanguage' attribute syntax behaves the same as the 'textWithLanguage' syntax. If a name is in a language that is different than the rest of the object or operation, then this 'nameWithLanguage' syntax is used rather than the generic 'nameWithoutLanguage' syntax.
- Example: If the client supplies the "attributes-natural-language" operation attribute with the value: 'en' indicating English, but the "printer-name" attribute is in German, the client MUST use the 'nameWithLanguage' attribute syntax as follows:
- 'de': Natural Language Override indicating German

2313 'Farbdrucker': the Printer name in German

2314

2315

2323

2324

2325

2326

2327

2328

- 4.1.2.3 Matching 'name' attribute values
- For purposes of matching two 'name' attribute values for equality, such as in job validation (where a client-supplied value for attribute "xxx" is checked to see if the value is among the values of the Printer object's corresponding "xxx-supported" attribute), the following match rules apply:
- 1. 'keyword' values never match 'name' values.
- 2320 2. 'name' (nameWithoutLanguage and nameWithLanguage) values match if (1) the name parts
  2321 match and (2) the Associated Natural-Language parts (see section 3.1.4.1) match. The matching
  2322 rules are:
  - a. the name parts match if the two names are identical character by character, except it is RECOMMENDED that case be ignored. For example: 'Ajax-letter-head-white' MUST match 'Ajax-letter-head-white' and SHOULD match 'ajax-letter-head-white' and 'AJAX-LETTER-HEAD-WHITE'.
  - b. the Associated Natural-Language parts match if the shorter of the two meets the syntactic requirements of RFC 1766 [RFC1766] and matches byte for byte with the longer. For example, 'en' matches 'en', 'en-us' and 'en-gb', but matches neither 'fr' nor 'e'.
- 2330 4.1.3 'keyword'
- The 'keyword' attribute syntax is a sequence of characters, length: 1 to 255, containing only the US-
- ASCII [ASCII] encoded values for lowercase letters ("a" "z"), digits ("0" "9"), hyphen ("-"), dot ("."),
- and underscore ("\_"). The first character MUST be a lowercase letter. Furthermore, keywords MUST
- be in U.S. English.
- This syntax type is used for enumerating semantic identifiers of entities in the abstract protocol, i.e.,
- entities identified in this document. Keywords are used as attribute names or values of attributes.
- Unlike 'text' and 'name' attribute values, 'keyword' values MUST NOT use the Natural Language
- Override mechanism, since they MUST always be US-ASCII and U.S. English.
- 2339 Keywords are for use in the protocol. A user interface will likely provide a mapping between protocol
- 2340 keywords and displayable user-friendly words and phrases which are localized to the natural language of

- the user. While the keywords specified in this document MAY be displayed to users whose natural
- language is U.S. English, they MAY be mapped to other U.S. English words for U.S. English users,
- since the user interface is outside the scope of this document.
- In the definition for each attribute of this syntax type, the full set of defined keyword values for that
- 2345 attribute are listed.
- 2346 When a keyword is used to represent an attribute (its name), it MUST be unique within the full scope of
- 2347 all IPP objects and attributes. When a keyword is used to represent a value of an attribute, it MUST be
- unique just within the scope of that attribute. That is, the same keyword MUST NOT be used for two
- 2349 different values within the same attribute to mean two different semantic ideas. However, the same
- 2350 keyword MAY be used across two or more attributes, representing different semantic ideas for each
- 2351 attribute. Section 6.1 describes how the protocol can be extended with new keyword values. Examples
- of attribute name keywords:
- 2353 "job-name"
- "attributes-charset"
- 2354 attributes-charset
- Note: This document uses "type1", "type2", and "type3" prefixes to the "keyword" basic syntax to
- indicate different levels of review for extensions (see section 6.1).
- 2358 4.1.4 'enum'
- The 'enum' attribute syntax is an enumerated integer value that is in the range from 1 to 2\*\*31 1
- 2360 (MAX). Each value has an associated 'keyword' name. In the definition for each attribute of this syntax
- type, the full set of possible values for that attribute are listed. This syntax type is used for attributes for
- which there are enum values assigned by other standards, such as SNMP MIBs. A number of attribute
- enum values in this specification are also used for corresponding attributes in other standards
- 2364 [RFC1759]. This syntax type is not used for attributes to which the administrator may assign values.
- Section 6.1 describes how the protocol can be extended with new enum values.
- Enum values are for use in the protocol. A user interface will provide a mapping between protocol enum
- values and displayable user-friendly words and phrases which are localized to the natural language of the
- user. While the enum symbols specified in this document MAY be displayed to users whose natural
- language is U.S. English, they MAY be mapped to other U.S. English words for U.S. English users,
- since the user interface is outside the scope of this document.
- Note: SNMP MIBs use '2' for 'unknown' which corresponds to the IPP "out-of-band" value 'unknown'.
- See the description of the "out-of-band" values at the beginning of Section 4.1. Therefore, attributes of
- 2373 type 'enum' start at '3'.
- Note: This document uses "type1", "type2", and "type3" prefixes to the "enum" basic syntax to indicate
- 2375 different levels of review for extensions (see section 6.1).

- 2376 4.1.5 'uri'
- The 'uri' attribute syntax is any valid Uniform Resource Identifier or URI [RFC2396]. Most often, URIs
- 2378 are simply Uniform Resource Locators or URLs. The maximum length of URIs used as values of IPP
- 2379 attributes is 1023 octets. Although most other IPP attribute syntax types allow for only lower-cased
- values, this attribute syntax type conforms to the case-sensitive and case-insensitive rules specified in
- [RFC2396]. See also [IPP-IIG] for a discussion of case in URIs.
- 2382 4.1.6 'uriScheme'
- The 'uriScheme' attribute syntax is a sequence of characters representing a URI scheme according to
- 2384 RFC 2396 [RFC2396]. Though RFC 2396 requires that the values be case-insensitive, IPP requires all
- lower case values in IPP attributes to simplify comparing by IPP clients and Printer objects. Standard
- values for this syntax type are the following keywords:
- 'http': for HTTP schemed URIs (e.g., "http:...")
- 2388 'https': for use with HTTPS schemed URIs (e.g., "https:...") (not on IETF standards track)
- 2389 'ftp': for FTP schemed URIs (e.g., "ftp:...")
- 'mailto': for SMTP schemed URIs (e.g., "mailto:...")
- 'file': for file schemed URIs (e.g., "file:...")
- 2392
- A Printer object MAY support any URI 'scheme' that has been registered with IANA [IANA-MT]. The
- maximum length of URI 'scheme' values used to represent IPP attribute values is 63 octets.
- 2395 4.1.7 'charset'
- The 'charset' attribute syntax is a standard identifier for a charset. A charset is a coded character set and
- encoding scheme. Charsets are used for labeling certain document contents and 'text' and 'name'
- 2398 attribute values. The syntax and semantics of this attribute syntax are specified in RFC 2046 [RFC2046]
- and contained in the IANA character-set Registry [IANA-CS] according to the IANA procedures
- 2400 [RFC2278]. Though RFC 2046 requires that the values be case-insensitive US-ASCII, IPP requires all
- lower case values in IPP attributes to simplify comparing by IPP clients and Printer objects. When a
- character-set in the IANA registry has more than one name (alias), the name labeled as "(preferred
- 2403 MIME name)", if present, MUST be used.
- The maximum length of 'charset' values used to represent IPP attribute values is 63 octets.
- 2405 Some examples are:
- 2406 'utf-8': ISO 10646 Universal Multiple-Octet Coded Character Set (UCS) represented as the UTF-8
- [RFC2279] transfer encoding scheme in which US-ASCII is a subset charset.
- 'us-ascii': 7-bit American Standard Code for Information Interchange (ASCII), ANSI X3.4-1986
- 2409 [ASCII]. That standard defines US-ASCII, but RFC 2045 [RFC2045] eliminates most of the
- control characters from conformant usage in MIME and IPP.

```
"iso-8859-1": 8-bit One-Byte Coded Character Set, Latin Alphabet Nr 1 [ISO8859-1]. That standard
2411
              defines a coded character set that is used by Latin languages in the Western Hemisphere and
2412
              Western Europe. US-ASCII is a subset charset.
2413
           "iso-10646-ucs-2": ISO 10646 Universal Multiple-Octet Coded Character Set (UCS) represented as
2414
              two octets (UCS-2), with the high order octet of each pair coming first (so-called Big Endian
2415
              integer).
2416
2417
       Some attribute descriptions MAY place additional requirements on charset values that may be used, such
2418
       as REQUIRED values that MUST be supported or additional restrictions, such as requiring that the
2419
       charset have US-ASCII as a subset charset.
2420
       4.1.8 'naturalLanguage'
2421
       The 'naturalLanguage' attribute syntax is a standard identifier for a natural language and optionally a
2422
       country. The values for this syntax type are defined by RFC 1766 [RFC1766]. Though RFC 1766
2423
       requires that the values be case-insensitive US-ASCII, IPP requires all lower case to simplify comparing
2424
       by IPP clients and Printer objects. Examples include:
2425
           'en': for English
2426
           'en-us': for US English
2427
           'fr': for French
2428
           'de': for German
2429
2430
       The maximum length of 'naturalLanguage' values used to represent IPP attribute values is 63 octets.
2431
       4.1.9 'mimeMediaType'
2432
       The 'mimeMediaType' attribute syntax is the Internet Media Type (sometimes called MIME type) as
2433
       defined by RFC 2046 [RFC2046] and registered according to the procedures of RFC 2048 [RFC2048]
2434
       for identifying a document format. The value MAY include a charset parameter, depending on the
2435
       specification of the Media Type in the IANA Registry [IANA-MT]. Although most other IPP syntax
2436
       types allow for only lower-cased values, this syntax type allows for mixed-case values which are case-
2437
       insensitive.
2438
       Examples are:
2439
           'text/html': An HTML document
2440
           'text/plain': A plain text document in US-ASCII (RFC 2046 indicates that in the absence of the
2441
              charset parameter MUST mean US-ASCII rather than simply unspecified) [RFC2046].
2442
           'text/plain; charset=US-ASCII': A plain text document in US-ASCII [52, 56].
2443
           'text/plain; charset=ISO-8859-1': A plain text document in ISO 8859-1 (Latin 1) [ISO8859-1].
2444
           'text/plain; charset=utf-8': A plain text document in ISO 10646 represented as UTF-8 [RFC2279]
2445
           'application/postscript': A PostScript document [RFC2046]
2446
           'application/vnd.hp-PCL': A PCL document [IANA-MT] (charset escape sequence embedded in the
2447
```

document data)

image/tiff': Tag Image Format - see IANA MIME Media Type registry
 iapplication/pdf': Portable Document Format - see IANA MIME Media Type registry
 iapplication/octet-stream': (REQUIRED) Auto-sense - see below

24522453

2454

2455

2456

2457

2458

2459

2460

2461

2462

2463

2464

2465

2466

2467

2468

2469

One special type is 'application/octet-stream'. If the Printer object supports this value, the Printer object MUST be capable of auto-sensing the format of the document data. If the Printer object's default value attribute "document-format-default" is set to 'application/octet-stream', the Printer object not only supports auto-sensing of the document format, but will depend on the result of applying its auto-sensing when the client does not supply the "document-format" attribute. If the client supplies a document format value, the Printer MUST rely on the supplied attribute, rather than trust its auto-sensing algorithm. To summarize:

- 1. If the client does not supply a document format value, the Printer MUST rely on its default value setting (which may be 'application/octet-stream' indicating an auto-sensing mechanism).
- 2. If the client supplies a value other than 'application/octet-stream', the client is supplying valid information about the format of the document data and the Printer object MUST trust the client supplied value more than the outcome of applying an automatic format detection mechanism. For example, the client may be requesting the printing of a PostScript file as a 'text/plain' document. The Printer object MUST print a text representation of the PostScript commands rather than interpret the stream of PostScript commands and print the result.
- 3. If the client supplies a value of 'application/octet-stream', the client is indicating that the Printer object MUST use its auto-sensing mechanism on the client supplied document data whether auto-sensing is the Printer object's default or not.

247024712472

2473

2474

2475

2476

Note: Since the auto-sensing algorithm is probabilistic, if the client requests both auto-sensing ("document-format" set to 'application/octet-stream') and true fidelity ("ipp-attribute-fidelity" set to 'true'), the Printer object might not be able to guarantee exactly what the end user intended (the auto-sensing algorithm might mistake one document format for another), but it is able to guarantee that its auto-sensing mechanism be used.

- The maximum length of a 'mimeMediaType' value to represent IPP attribute values is 255 octets.
- 2478 4.1.10 'octetString'
- The 'octetString' attribute syntax is a sequence of octets encoded in a maximum of 1023 octets which is indicated in sub-section headers using the notation: octetString(MAX). This syntax type is used for opaque data.
- 2482 4.1.11 'boolean'
- The 'boolean' attribute syntax has only two values: 'true' and 'false'.

- 2484 4.1.12 'integer'
- The 'integer' attribute syntax is an integer value that is in the range from -2\*\*31 (MIN) to 2\*\*31 1
- 2486 (MAX). Each individual attribute may specify the range constraint explicitly in sub-section headers if
- the range is different from the full range of possible integer values. For example: job-priority
- 2488 (integer(1:100)) for the "job-priority" attribute. However, the enforcement of that additional constraint is
- up to the IPP objects, not the protocol.
- 2490 4.1.13 'rangeOfInteger'
- The 'rangeOfInteger' attribute syntax is an ordered pair of integers that defines an inclusive range of
- integer values. The first integer specifies the lower bound and the second specifies the upper bound. If a
- range constraint is specified in the header description for an attribute in this document whose attribute
- syntax is 'rangeOfInteger' (i.e., 'X:Y' indicating X as a minimum value and Y as a maximum value), then
- the constraint applies to both integers.
- 2496 4.1.14 'dateTime'
- The 'dateTime' attribute syntax is a standard, fixed length, 11 octet representation of the "DateAndTime"
- syntax as defined in RFC 1903 [RFC1903]. RFC 1903 also identifies an 8 octet representation of a
- "DateAndTime" value, but IPP objects MUST use the 11 octet representation. A user interface will
- 2500 provide a mapping between protocol dateTime values and displayable user-friendly words or
- presentation values and phrases which are localized to the natural language and date format of the user.
- 2502 4.1.15 'resolution'
- The 'resolution' attribute syntax specifies a two-dimensional resolution in the indicated units. It consists
- of 3 values: a cross feed direction resolution (positive integer value), a feed direction resolution (positive
- integer value), and a units value. The semantics of these three components are taken from the Printer
- 2506 MIB [RFC1759] suggested values. That is, the cross feed direction component resolution component is
- 2507 the same as the prtMarkerAddressabilityXFeedDir object in the Printer MIB, the feed direction
- component resolution component is the same as the prtMarkerAddressabilityFeedDir in the Printer MIB,
- and the units component is the same as the prtMarkerAddressabilityUnit object in the Printer MIB
- (namely, 3' indicates dots per inch and 4' indicates dots per centimeter). All three values MUST be
- present even if the first two values are the same. Example: '300', '600', '3' indicates a 300 dpi cross-feed
- direction resolution, a 600 dpi feed direction resolution, since a 3' indicates dots per inch (dpi).
- 2513 4.1.16 '1setOf X'
- 2514 The '1setOf X' attribute syntax is 1 or more values of attribute syntax type X. This syntax type is used
- for multi-valued attributes. The syntax type is called '1setOf' rather than just 'setOf' as a reminder that
- 2516 the set of values MUST NOT be empty (i.e., a set of size 0). Sets are normally unordered. However
- each attribute description of this type may specify that the values MUST be in a certain order for that
- 2518 attribute.

# 2519 4.2 Job Template Attributes

- Job Template attributes describe job processing behavior. Support for Job Template attributes by a
  Printer object is OPTIONAL (see section 13.2.3 for a description of support for OPTIONAL attributes).
  Also, clients OPTIONALLY supply Job Template attributes in create requests.
- Job Template attributes conform to the following rules. For each Job Template attribute called "xxx":
  - 1. If the Printer object supports "xxx" then it MUST support both a "xxx-default" attribute (unless there is a "No" in the table below) and a "xxx-supported" attribute. If the Printer object doesn't support "xxx", then it MUST support neither an "xxx-default" attribute nor an "xxx-supported" attribute, and it MUST treat an attribute "xxx" supplied by a client as unsupported. An attribute "xxx" may be supported for some document formats and not supported for other document formats. For example, it is expected that a Printer object would only support "orientation-requested" for some document formats (such as 'text/plain' or 'text/html') but not others (such as 'application/postscript').
  - 2. "xxx" is OPTIONALLY supplied by the client in a create request. If "xxx" is supplied, the client is indicating a desired job processing behavior for this Job. When "xxx" is not supplied, the client is indicating that the Printer object apply its default job processing behavior at job processing time if the document content does not contain an embedded instruction indicating an xxx-related behavior.
    - Note: Since an administrator MAY change the default value attribute after a Job object has been submitted but before it has been processed, the default value used by the Printer object at job processing time may be different that the default value in effect at job submission time.
  - 3. The "xxx-supported" attribute is a Printer object attribute that describes which job processing behaviors are supported by that Printer object. A client can query the Printer object to find out what xxx-related behaviors are supported by inspecting the returned values of the "xxx-supported" attribute.
    - Note: The "xxx" in each "xxx-supported" attribute name is singular, even though an "xxx-supported" attribute usually has more than one value, such as "job-sheet-supported", unless the "xxx" Job Template attribute is plural, such as "finishings" or "sides". In such cases the "xxx-supported" attribute names are: "finishings-supported" and "sides-supported".
  - 4. The "xxx-default" default value attribute describes what will be done at job processing time when no other job processing information is supplied by the client (either explicitly as an IPP attribute in the create request or implicitly as an embedded instruction within the document data).

If an application wishes to present an end user with a list of supported values from which to choose, the application SHOULD query the Printer object for its supported value attributes. The application SHOULD also query the default value attributes. If the application then limits selectable values to only those value that are supported, the application can guarantee that the values supplied by the client in the

- create request all fall within the set of supported values at the Printer. When querying the Printer, the client MAY enumerate each attribute by name in the Get-Printer-Attributes Request, or the client MAY just name the "job-template" group in order to get the complete set of supported attributes (both supported and default attributes).
- The "finishings" attribute is an example of a Job Template attribute. It can take on a set of values such 2565 as 'staple', 'punch', and/or 'cover'. A client can query the Printer object for the "finishings-supported" 2566 attribute and the "finishings-default" attribute. The supported attribute contains a set of supported 2567 values. The default value attribute contains the finishing value(s) that will be used for a new Job if the 2568 client does not supply a "finishings" attribute in the create request and the document data does not 2569 contain any corresponding finishing instructions. If the client does supply the "finishings" attribute in 2570 the create request, the IPP object validates the value or values to make sure that they are a subset of the 2571 supported values identified in the Printer object's "finishings-supported" attribute. See section 3.2.1.2. 2572
- The table below summarizes the names and relationships for all Job Template attributes. The first 2573 column of the table (labeled "Job Attribute") shows the name and syntax for each Job Template attribute 2574 in the Job object. These are the attributes that can optionally be supplied by the client in a create request. 2575 The last two columns (labeled "Printer: Default Value Attribute" and "Printer: Supported Values 2576 Attribute") shows the name and syntax for each Job Template attribute in the Printer object (the default 2577 value attribute and the supported values attribute). A "No" in the table means the Printer MUST NOT 2578 support the attribute (that is, the attribute is simply not applicable). For brevity in the table, the 'text' and 2579 'name' entries do not show the maximum length for each attribute. 2580

+=======+	-=============	h==========
Job Attribute	Printer: Default Value Attribute	Printer: Supported   Values Attribute
job-priority     (integer 1:100)	<pre>job-priority-default (integer 1:100)</pre>	job-priority-supported (integer 1:100)
job-hold-until   (type3 keyword       name)	job-hold-until- default (type3 keyword   name)	job-hold-until-   supported   (1setOf   type3 keyword   name)
job-sheets   (type3 keyword       name)	job-sheets-default (type3 keyword   name)	job-sheets-supported   (1setOf   type3 keyword   name)
multiple-document-	multiple-document- handling-default (type2 keyword)	multiple-document- handling-supported (1setOf type2 keyword)
copies   (integer (1:MAX))	copies-default (integer (1:MAX))	copies-supported (rangeOfInteger (1:MAX))
finishings  (1setOf type2 enum)	finishings-default (1setOf type2 enum)	finishings-supported   (1setOf type2 enum)
page-ranges   (1setOf   rangeOfInteger   (1:MAX))	No	page-ranges- supported (boolean)
sides   (type2 keyword)	sides-default (type2 keyword)	sides-supported (1setOf type2 keyword)
number-up   (integer (1:MAX))	number-up-default (integer (1:MAX))	number-up-supported   (1setOf integer (1:MAX)   rangeOfInteger (1:MAX))
orientation-     requested   (type2 enum)	orientation-requested- default (type2 enum)	orientation-requested- supported (1setOf type2 enum)
media   (type3 keyword       name)	media-default (type3 keyword   name)	media-supported   (1setOf   type3 keyword   name)

2631 2632			(1setOf type3 keyword   name)
2633 2634 2635	printer-resolution	printer-resolution- default	printer-resolution-   supported
2636	(lesolucion)	(resolution)	(1setOf resolution)
2637 2638 2639	print-quality     (type2 enum)	print-quality-default (type2 enum)	print-quality-   supported
2640 2641			(1setOf type2 enum)

2644

2645

2646

2647

2648

2656

2657

2658

2659

2660

2661

# 4.2.1 job-priority (integer(1:100))

This attribute specifies a priority for scheduling the Job. A higher value specifies a higher priority. The value 1 indicates the lowest possible priority. The value 100 indicates the highest possible priority. Among those jobs that are ready to print, a Printer MUST print all jobs with a priority value of n before printing those with a priority value of n-1 for all n.

If the Printer object supports this attribute, it MUST always support the full range from 1 to 100. No administrative restrictions are permitted. This way an end-user can always make full use of the entire range with any Printer object. If privileged jobs are implemented outside IPP/1.1, they MUST have priorities higher than 100, rather than restricting the range available to end-users.

If the client does not supply this attribute and this attribute is supported by the Printer object, the Printer object MUST use the value of the Printer object's "job-priority-default" at job submission time (unlike most Job Template attributes that are used if necessary at job processing time).

The syntax for the "job-priority-supported" is also integer(1:100). This single integer value indicates the number of priority levels supported. The Printer object MUST take the value supplied by the client and map it to the closest integer in a sequence of n integers values that are evenly distributed over the range from 1 to 100 using the formula:

roundToNearestInt((100x+50)/n)

where n is the value of "job-priority-supported" and x ranges from 0 through n-1.

For example, if n=1 the sequence of values is 50; if n=2, the sequence of values is: 25 and 75; if n=3, the sequence of values is: 17, 50 and 83; if n=10, the sequence of values is: 5, 15, 25, 35, 45, 55, 65, 75, 85, and 95; if n=100, the sequence of values is: 1, 2, 3, ... 100.

If the value of the Printer object's "job-priority-supported" is 10 and the client supplies values in the range 1 to 10, the Printer object maps them to 5, in the range 11 to 20, the Printer object maps them to 15, etc.

- 4.2.2 job-hold-until (type3 keyword | name (MAX))
- This attribute specifies the named time period during which the Job MUST become a candidate for
- 2670 printing.
- Standard keyword values for named time periods are:
- 2672 'no-hold': immediately, if there are not other reasons to hold the job
- indefinite': the job is held indefinitely, until a client performs a Release-Job (section 3.3.6)
- 2674 'day-time': during the day
- 2675 'evening': evening
- 2676 'night': night
- 2677 'weekend': weekend
- 2678 'second-shift': second-shift (after close of business)
- 2679 'third-shift': third-shift (after midnight)
- 2680
- An administrator MUST associate allowable print times with a named time period (by means outside the
- scope of this IPP/1.1 document). An administrator is encouraged to pick names that suggest the type of
- time period. An administrator MAY define additional values using the 'name' or 'keyword' attribute
- syntax, depending on implementation.
- 2685 If the value of this attribute specifies a time period that is in the future, the Printer MUST add the job-
- 2686 hold-until-specified' value to the job's "job-state-reasons" attribute, move the job to the 'pending-held'
- state, and MUST NOT schedule the job for printing until the specified time-period arrives. When the
- specified time period arrives, the Printer MUST remove the 'job-hold-until-specified' value from the
- job's "job-state-reason" attribute and, if there are no other job state reasons that keep the job in the
- 2690 'pending-held' state, the Printer MUST consider the job as a candidate for processing by moving the job
- to the 'pending' state.
- 2692 If this job attribute value is the named value 'no-hold', or the specified time period has already started,
- 2693 the job MUST be a candidate for processing immediately.
- 2694 If the client does not supply this attribute and this attribute is supported by the Printer object, the Printer
- object MUST use the value of the Printer object's "job-hold-until-default" at job submission time (unlike
- 2696 most Job Template attributes that are used if necessary at job processing time).
- 4.2.3 job-sheets (type3 keyword | name(MAX))
- This attribute determines which job start/end sheet(s), if any, MUST be printed with a job.
- 2699 Standard keyword values are:
- 2700 'none': no job sheet is printed
- 2701 'standard': one or more site specific standard job sheets are printed, e.g. a single start sheet or both
- start and end sheet is printed

- An administrator MAY define additional values using the 'name' or 'keyword' attribute syntax, depending on implementation.
- Note: The effect of this attribute on jobs with multiple documents MAY be affected by the "multiple-document-handling" job attribute (section 4.2.4), depending on the job sheet semantics.
- 2708 4.2.4 multiple-document-handling (type2 keyword)
- 2709 This attribute is relevant only if a job consists of two or more documents. The attribute controls finishing
- operations and the placement of one or more print-stream pages into impressions and onto media sheets.
- When the value of the "copies" attribute exceeds 1, it also controls the order in which the copies that
- 2712 result from processing the documents are produced. For the purposes of this explanations, if "a"
- 2713 represents an instance of document data, then the result of processing the data in document "a" is a
- sequence of media sheets represented by "a(\*)".
- 2715 Standard keyword values are:

2717

2718

2719

2720

2721

2722

2723

2724

2725

2726

2727

2728

2729

2730

2731

2732

2733

2734

2735

2736

2737

2738

2739

2740

27412742

2743

2744

- 'single-document': If a Job object has multiple documents, say, the document data is called a and b, then the result of processing all the document data (a and then b) MUST be treated as a single sequence of media sheets for finishing operations; that is, finishing would be performed on the concatenation of the sequences a(\*),b(\*). The Printer object MUST NOT force the data in each document instance to be formatted onto a new print-stream page, nor to start a new impression on a new media sheet. If more than one copy is made, the ordering of the sets of media sheets resulting from processing the document data MUST be a(\*), b(\*), a(\*), b(\*), ..., and the Printer object MUST force each copy (a(\*),b(\*)) to start on a new media sheet.
- 'separate-documents-uncollated-copies': If a Job object has multiple documents, say, the document data is called a and b, then the result of processing the data in each document instance MUST be treated as a single sequence of media sheets for finishing operations; that is, the sets a(\*) and b(\*) would each be finished separately. The Printer object MUST force each copy of the result of processing the data in a single document to start on a new media sheet. If more than one copy is made, the ordering of the sets of media sheets resulting from processing the document data MUST be a(\*), a(\*), ..., b(\*), b(\*) ....
- 'separate-documents-collated-copies': If a Job object has multiple documents, say, the document data is called a and b, then the result of processing the data in each document instance MUST be treated as a single sequence of media sheets for finishing operations; that is, the sets a(\*) and b(\*) would each be finished separately. The Printer object MUST force each copy of the result of processing the data in a single document to start on a new media sheet. If more than one copy is made, the ordering of the sets of media sheets resulting from processing the document data MUST be a(\*), b(\*), a(\*), b(\*), ....
- 'single-document-new-sheet': Same as 'single-document', except that the Printer object MUST ensure that the first impression of each document instance in the job is placed on a new media sheet. This value allows multiple documents to be stapled together with a single staple where each document starts on a new sheet.
- The 'single-document' value is the same as 'separate-documents-collated-copies' with respect to ordering of print-stream pages, but not media sheet generation, since 'single-document' will put the first page of

February 17, 1999

- the next document on the back side of a sheet if an odd number of pages have been produced so far for
- 2746 the job, while 'separate-documents-collated-copies' always forces the next document or document copy
- on to a new sheet. In addition, if the "finishings" attribute specifies 'staple', then with 'single-document',
- documents a and b are stapled together as a single document with no regard to new sheets, with 'single-
- document-new-sheet', documents a and b are stapled together as a single document, but document b
- starts on a new sheet, but with 'separate-documents-uncollated-copies' and 'separate-documents-collated-
- copies', documents a and b are stapled separately.
- Note: None of these values provide means to produce uncollated sheets within a document, i.e., where
- 2753 multiple copies of sheet n are produced before sheet n+1 of the same document.
- 2754 The relationship of this attribute and the other attributes that control document processing is described in
- 2755 section 16.3.

- 2756 4.2.5 copies (integer(1:MAX))
- 2757 This attribute specifies the number of copies to be printed.
- On many devices the supported number of collated copies will be limited by the number of physical
- output bins on the device, and may be different from the number of uncollated copies which can be
- supported.
- Note: The effect of this attribute on jobs with multiple documents is controlled by the "multiple-
- document-handling" job attribute (section 4.2.4) and the relationship of this attribute and the other
- 2763 attributes that control document processing is described in section 16.3.
- 4.2.6 finishings (1setOf type2 enum)
- This attribute identifies the finishing operations that the Printer uses for each copy of each printed
- document in the Job. For Jobs with multiple documents, the "multiple-document-handling" attribute
- determines what constitutes a "copy" for purposes of finishing.
- 2768 Standard enum values are:

2769	Value	Symbolic Name and Description
2770		
2771	3'	'none': Perform no finishing
2772	'4'	'staple': Bind the document(s) with one or more staples. The exact number and placement
2773		of the staples is site-defined.
2774	<b>'</b> 5'	'punch': This value indicates that holes are required in the finished document. The exact
2775		number and placement of the holes is site-defined. The punch specification MAY
2776		be satisfied (in a site- and implementation-specific manner) either by
2777		drilling/punching, or by substituting pre-drilled media.
2778	<b>'</b> 6'	'cover': This value is specified when it is desired to select a non-printed (or pre-printed)
2779		cover for the document. This does not supplant the specification of a printed cover
2780		(on cover stock medium) by the document itself.

February 17, 1999

2781 2782 2783	7'	bind': This value indicates that a binding is to be applied to the document; the type and placement of the binding is site-defined.
2784 2785 2786	'8'	'saddle-stitch': Bind the document(s) with one or more staples (wire stitches) along the middle fold. The exact number and placement of the staples and the middle fold is implementation and/or site-defined.
2787 2788 2789	<i>'</i> 9'	'edge-stitch': Bind the document(s) with one or more staples (wire stitches) along one edge. The exact number and placement of the staples is implementation and/or site-defined.
2790	'10'-'19'	reserved for future generic finishing enum values.
2791 2792	_	y values are more specific; they indicate a corner or an edge as if the document were a nent (see below):
2793	20'	'staple-top-left': Bind the document(s) with one or more staples in the top left corner.
2794	21,	'staple-bottom-left': Bind the document(s) with one or more staples in the bottom left
2795		corner.
2796	22'	'staple-top-right': Bind the document(s) with one or more staples in the top right corner.
2797	23'	'staple-bottom-right': Bind the document(s) with one or more staples in the bottom right
2798		corner.
2799	'24'	'edge-stitch-left': Bind the document(s) with one or more staples (wire stitches) along the
2800 2801		left edge. The exact number and placement of the staples is implementation and/or site-defined.
2802	25'	'edge-stitch-top': Bind the document(s) with one or more staples (wire stitches) along the
2803		top edge. The exact number and placement of the staples is implementation
2804		and/or site-defined.
2805	'26'	'edge-stitch-right': Bind the document(s) with one or more staples (wire stitches) along
2806		the right edge. The exact number and placement of the staples is implementation
2807		and/or site-defined.
2808	27'	'edge-stitch-bottom': Bind the document(s) with one or more staples (wire stitches) along
2809		the bottom edge. The exact number and placement of the staples is
2810		implementation and/or site-defined.
2811	'28'	'staple-dual-left': Bind the document(s) with two staples (wire stitches) along the left
2812		edge assuming a portrait document (see above).
2813	'29'	'staple-dual-top': Bind the document(s) with two staples (wire stitches) along the top
2814		edge assuming a portrait document (see above).
2815	30'	'staple-dual-right': Bind the document(s) with two staples (wire stitches) along the right
2816		edge assuming a portrait document (see above).
2817	31'	'staple-dual-bottom': Bind the document(s) with two staples (wire stitches) along the
2818		bottom edge assuming a portrait document (see above).
	TP1 2-41	w'velves are an eited with respect to the decourant as if the decourant was a market

The 'staple-xxx' values are specified with respect to the document as if the document were a portrait document. If the document is actually a landscape or a reverse-landscape document, the client supplies the appropriate transformed value. For example, to position a staple in the upper left hand corner of a landscape document when held for reading, the client supplies the 'staple-bottom-left' value (since landscape is defined as a +90 degree rotation from portrait, i.e., anti-clockwise). On the other hand, to position a staple in the upper left hand corner of a reverse-landscape document when held for reading,

2819

2820

2821

2822

2823

- the client supplies the 'staple-top-right' value (since reverse-landscape is defined as a -90 degree rotation
- from portrait, i.e., clockwise).
- The angle (vertical, horizontal, angled) of each staple with respect to the document depends on the
- implementation which may in turn depend on the value of the attribute.
- Note: The effect of this attribute on jobs with multiple documents is controlled by the "multiple-
- document-handling" job attribute (section 4.2.4) and the relationship of this attribute and the other
- attributes that control document processing is described in section 16.3.
- 2832 If the client supplies a value of 'none' along with any other combination of values, it is the same as if
- only that other combination of values had been supplied (that is the 'none' value has no effect).
- 2834 4.2.7 page-ranges (1setOf rangeOfInteger (1:MAX))
- This attribute identifies the range(s) of print-stream pages that the Printer object uses for each copy of
- each document which are to be printed. Nothing is printed for any pages identified that do not exist in
- the document(s). Ranges MUST be in ascending order, for example: 1-3, 5-7, 15-19 and MUST NOT
- overlap, so that a non-spooling Printer object can process the job in a single pass. If the ranges are not
- ascending or are overlapping, the IPP object MUST reject the request and return the 'client-error-bad-
- request' status code. The attribute is associated with print-stream pages not application-numbered pages
- 2841 (for example, the page numbers found in the headers and or footers for certain word processing
- applications).
- For Jobs with multiple documents, the "multiple-document-handling" attribute determines what
- constitutes a "copy" for purposes of the specified page range(s). When "multiple-document-handling" is
- 2845 'single-document', the Printer object MUST apply each supplied page range once to the concatenation of
- the print-stream pages. For example, if there are 8 documents of 10 pages each, the page-range '41:60'
- prints the pages in the 5th and 6th documents as a single document and none of the pages of the other
- documents are printed. When "multiple-document-handling" is 'separate-document-uncollated-copies' or
- 2849 'separate-document-collated-copies', the Printer object MUST apply each supplied page range repeatedly
- to each document copy. For the same job, the page-range '1:3, 10:10' would print the first 3 pages and
- the 10th page of each of the 8 documents in the Job, as 8 separate documents.
- In most cases, the exact pages to be printed will be generated by a device driver and this attribute would
- 2853 not be required. However, when printing an archived document which has already been formatted, the
- end user may elect to print just a subset of the pages contained in the document. In this case, if page-
- range = n.m is specified, the first page to be printed will be page n. All subsequent pages of the
- document will be printed through and including page m.
- "page-ranges-supported" is a boolean value indicating whether or not the printer is capable of supporting
- the printing of page ranges. This capability may differ from one PDL to another. There is no "page-
- ranges-default" attribute. If the "page-ranges" attribute is not supplied by the client, all pages of the
- document will be printed.

- Note: The effect of this attribute on jobs with multiple documents is controlled by the "multiple-document-handling" job attribute (section 4.2.4) and the relationship of this attribute and the other attributes that control document processing is described in section 16.3.
- 4.2.8 sides (type2 keyword)
- This attribute specifies how print-stream pages are to be imposed upon the sides of an instance of a selected medium, i.e., an impression.
- The standard keyword values are:

2869

2870

2871

2872

2873

2874

2875

2876

2877 2878

2896 2897

- 'one-sided': imposes each consecutive print-stream page upon the same side of consecutive media sheets.
- 'two-sided-long-edge': imposes each consecutive pair of print-stream pages upon front and back sides of consecutive media sheets, such that the orientation of each pair of print-stream pages on the medium would be correct for the reader as if for binding on the long edge. This imposition is sometimes called 'duplex' or 'head-to-head'.
- 'two-sided-short-edge': imposes each consecutive pair of print-stream pages upon front and back sides of consecutive media sheets, such that the orientation of each pair of print-stream pages on the medium would be correct for the reader as if for binding on the short edge. This imposition is sometimes called 'tumble' or 'head-to-toe'.
- itwo-sided-long-edge', 'two-sided-short-edge', 'tumble', and 'duplex' all work the same for portrait or landscape. However 'head-to-toe' is 'tumble' in portrait but 'duplex' in landscape. 'head-to-head' also switches between 'duplex' and 'tumble' when using portrait and landscape modes.
- Note: The effect of this attribute on jobs with multiple documents is controlled by the "multiple-document-handling" job attribute (section 4.2.4) and the relationship of this attribute and the other attributes that control document processing is described in section 16.3.
- 2885 4.2.9 number-up (integer(1:MAX))
- This attribute specifies the number of print-stream pages to impose upon a single side of an instance of a selected medium. For example, if the value is:

2888	Value	Description
2889		
2890	'1'	the Printer MUST place one print-stream page on a single side of an instance of the
2891		selected medium (MAY add some sort of translation, scaling, or rotation).
2892	2'	the Printer MUST place two print-stream pages on a single side of an instance of the
2893		selected medium (MAY add some sort of translation, scaling, or rotation).
2894	'4'	the Printer MUST place four print-stream pages on a single side of an instance of the
2895		selected medium (MAY add some sort of translation, scaling, or rotation).
2891 2892 2893 2894	2'	selected medium (MAY add some sort of translation, scaling, or rotation). the Printer MUST place two print-stream pages on a single side of an instance of the selected medium (MAY add some sort of translation, scaling, or rotation). the Printer MUST place four print-stream pages on a single side of an instance of the selected medium (MAY add some sort of translation, scaling, or rotation).

This attribute primarily controls the translation, scaling and rotation of print-stream pages.

Note: The effect of this attribute on jobs with multiple documents is controlled by the "multiple-document-handling" job attribute (section 4.2.4) and the relationship of this attribute and the other attributes that control document processing is described in section 16.3.

4.2.10 orientation-requested (type2 enum)

This attribute indicates the desired orientation for printed print-stream pages; it does not describe the orientation of the client-supplied print-stream pages.

For some document formats (such as 'application/postscript'), the desired orientation of the print-stream pages is specified within the document data. This information is generated by a device driver prior to the submission of the print job. Other document formats (such as 'text/plain') do not include the notion of desired orientation within the document data. In the latter case it is possible for the Printer object to bind the desired orientation to the document data after it has been submitted. It is expected that a Printer object would only support "orientations-requested" for some document formats (e.g., 'text/plain' or 'text/html') but not others (e.g., 'application/postscript'). This is no different than any other Job Template attribute since section 4.2, item 1, points out that a Printer object may support or not support any Job Template attribute based on the document format supplied by the client. However, a special mention is made here since it is very likely that a Printer object will support "orientation-requested" for only a subset of the supported document formats.

#### Standard enum values are:

2904

2905

2906

2907

2908

2909

2910

2911

2912

2913

2914

2916	Value	Symbolic Name and Description
2917		
2918	3'	'portrait': The content will be imaged across the short edge of the medium.
2919	'4'	'landscape': The content will be imaged across the long edge of the medium. Landscape
2920		is defined to be a rotation of the print-stream page to be imaged by +90 degrees
2921		with respect to the medium (i.e. anti-clockwise) from the portrait orientation.
2922		Note: The +90 direction was chosen because simple finishing on the long edge is
2923		the same edge whether portrait or landscape
2924	'5'	'reverse-landscape': The content will be imaged across the long edge of the medium.
2925		Reverse-landscape is defined to be a rotation of the print-stream page to be
2926		imaged by -90 degrees with respect to the medium (i.e. clockwise) from the
2927		portrait orientation. Note: The 'reverse-landscape' value was added because some
2928		applications rotate landscape -90 degrees from portrait, rather than +90 degrees.
2929	<b>'</b> 6'	'reverse-portrait': The content will be imaged across the short edge of the medium.
2930		Reverse-portrait is defined to be a rotation of the print-stream page to be imaged
2931		by 180 degrees with respect to the medium from the portrait orientation. Note:
2932		The 'reverse-portrait' value was added for use with the "finishings" attribute in
2933		cases where the opposite edge is desired for finishing a portrait document on
2934		simple finishing devices that have only one finishing position. Thus a 'text'/plain'
2935		portrait document can be stapled "on the right" by a simple finishing device as is
2936		common use with some middle eastern languages such as Hebrew.
2937		

- Note: The effect of this attribute on jobs with multiple documents is controlled by the "multiple-
- document-handling" job attribute (section 4.2.4) and the relationship of this attribute and the other
- 2940 attributes that control document processing is described in section 16.3.
- 4.2.11 media (type3 keyword | name(MAX))
- This attribute identifies the medium that the Printer uses for all impressions of the Job.
- The values for "media" include medium-names, medium-sizes, input-trays and electronic forms so that
- one attribute specifies the media. If a Printer object supports a medium name as a value of this attribute,
- such a medium name implicitly selects an input-tray that contains the specified medium. If a Printer
- object supports a medium size as a value of this attribute, such a medium size implicitly selects a
- medium name that in turn implicitly selects an input-tray that contains the medium with the specified
- size. If a Printer object supports an input-tray as the value of this attribute, such an input-tray implicitly
- selects the medium that is in that input-tray at the time the job prints. This case includes manual-feed
- input-trays. If a Printer object supports an electronic form as the value of this attribute, such an
- electronic form implicitly selects a medium-name that in turn implicitly selects an input-tray that
- contains the medium specified by the electronic form. The electronic form also implicitly selects an
- image that the Printer MUST merge with the document data as its prints each page.
- Standard keyword values are (taken from ISO DPA and the Printer MIB) and are listed in section 15. An
- 2955 administrator MAY define additional values using the 'name' or 'keyword' attribute syntax, depending on
- implementation.
- There is also an additional Printer attribute named "media-ready" which differs from "media-supported"
- in that legal values only include the subset of "media-supported" values that are physically loaded and
- ready for printing with no operator intervention required. If an IPP object supports "media-supported", it
- 2960 NEED NOT support "media-ready".
- The relationship of this attribute and the other attributes that control document processing is described in
- 2962 section 16.3.
- 2963 4.2.12 printer-resolution (resolution)
- This attribute identifies the resolution that Printer uses for the Job.
- 2965 4.2.13 print-quality (type2 enum)
- This attribute specifies the print quality that the Printer uses for the Job.
- The standard enum values are:

**T** 7 1

2968	Value	Symbolic Name and Description
2969		
2970	3'	'draft': lowest quality available on the printer

2971 '4' 'normal': normal or intermediate quality on the printer

2972 2973	'5'	'high': highest quality available on the printer
2974	4.3 Job De	scription Attributes

The attributes in this section form the attribute group called "job-description". The following table summarizes these attributes. The third column indicates whether the attribute is a REQUIRED attribute that MUST be supported by Printer objects. If it is not indicated as REQUIRED, then it is OPTIONAL. The maximum size in octets for 'text' and 'name' attributes is indicated in parenthesizes.

2979 - 2980	+	Syntax	++   REQUIRED?
2981 + 2982   2983 + 2984	+	uri	+   REQUIRED
	+	integer(1:MAX)	+   REQUIRED
985 · 986	+	uri	+
987 · 988	job-more-info	uri	
.989 · .990	job-name	name (MAX)	REQUIRED
991 ·	job-originating-user-name	name (MAX)	REQUIRED
993 · 994	job-state	type1 enum	REQUIRED
995	job-state-reasons	1setOf type2 keyword	
2997 · 2998	job-state-message	text (MAX)	
999 - 8000	number-of-documents	integer (0:MAX)	
3001 · · · · · · · · · · · · · · · · · ·	output-device-assigned	name (127)	
3003 + 3004   3005 + 3006   3007 + 3008   3009 + 3010	time-at-creation	integer (0:MAX)	
	time-at-processing	integer (0:MAX)	
	time-at-completed	integer (0:MAX)	
	number-of-intervening-jobs	integer (0:MAX)	
011 · 012	job-message-from-operator	text (127)	
013 · 014	job-k-octets	integer (0:MAX)	
015 · 016	job-impressions	integer (0:MAX)	
3017 + 3018   3019 + 3020   3021 + 3022   3023 + 3024   3025 + 3026   3026	job-media-sheets	integer (0:MAX)	
	job-k-octets-processed	integer (0:MAX)	
	job-impressions-completed	integer (0:MAX)	
	job-media-sheets-completed	integer (0:MAX)	   
	attributes-charset	charset	REQUIRED
3027 · 3028	attributes-natural-language	naturalLanguage	REQUIRED

3029 +----+

3030 3031

- 4.3.1 job-uri (uri)
- This REQUIRED attribute contains the URI for the job. The Printer object, on receipt of a new job,
- generates a URI which identifies the new Job. The Printer object returns the value of the "job-uri"
- attribute as part of the response to a create request. The precise format of a Job URI is implementation
- dependent. If the Printer object supports more than one URI and there is some relationship between the
- newly formed Job URI and the Printer object's URI, the Printer object uses the Printer URI supplied by
- the client in the create request. For example, if the create request comes in over a secure channel, the
- new Job URI MUST use the same secure channel. This can be guaranteed because the Printer object is
- responsible for generating the Job URI and the Printer object is aware of its security configuration and
- policy as well as the Printer URI used in the create request.
- For a description of this attribute and its relationship to "job-id" and "job-printer-uri" attribute, see the
- discussion in section 2.4 on "Object Identity".
- 3044 4.3.2 job-id (integer(1:MAX))
- This REQUIRED attribute contains the ID of the job. The Printer, on receipt of a new job, generates an
- 3046 ID which identifies the new Job on that Printer. The Printer returns the value of the "job-id" attribute as
- part of the response to a create request. The 0 value is not included to allow for compatibility with
- 3048 SNMP index values which also cannot be 0.
- For a description of this attribute and its relationship to "job-uri" and "job-printer-uri" attribute, see the
- discussion in section 2.4 on "Object Identity".
- 3051 4.3.3 job-printer-uri (uri)
- This REQUIRED attribute identifies the Printer object that created this Job object. When a Printer
- object creates a Job object, it populates this attribute with the Printer object URI that was used in the
- create request. This attribute permits a client to identify the Printer object that created this Job object
- when only the Job object's URI is available to the client. The client queries the creating Printer object to
- determine which languages, charsets, operations, are supported for this Job.
- For a description of this attribute and its relationship to "job-uri" and "job-id" attribute, see the
- discussion in section 2.4 on "Object Identity".
- 3059 4.3.4 job-more-info (uri)
- Similar to "printer-more-info", this attribute contains the URI referencing some resource with more
- information about this Job object, perhaps an HTML page containing information about the Job.

### 4.3.5 job-name (name(MAX))

This REQUIRED attribute is the name of the job. It is a name that is more user friendly than the "job-3063 uri" attribute value. It does not need to be unique between Jobs. The Job's "job-name" attribute is set to 3064 the value supplied by the client in the "job-name" operation attribute in the create request (see Section 3065 3.2.1.1). If, however, the "job-name" operation attribute is not supplied by the client in the create 3066 request, the Printer object, on creation of the Job, MUST generate a name. The printer SHOULD 3067 generate the value of the Job's "job-name" attribute from the first of the following sources that produces 3068 a value: 1) the "document-name" operation attribute of the first (or only) document, 2) the "document-3069 URI" attribute of the first (or only) document, or 3) any other piece of Job specific and/or Document 3070 Content information. 3071

# 3072 4.3.6 job-originating-user-name (name(MAX))

object sets this attribute to the most authenticated printable name that it can obtain from the authentication service over which the IPP operation was received. Only if such is not available, does the Printer object use the value supplied by the client in the "requesting-user-name" operation attribute of the create operation (see Section 8).

This REQUIRED attribute contains the name of the end user that submitted the print job. The Printer

Note: The Printer object needs to keep an internal originating user id of some form, typically as a credential of a principal, with the Job object. Since such an internal attribute is implementation-

dependent and not of interest to clients, it is not specified as a Job Description attribute. This originating

user id is used for authorization checks (if any) on all subsequent operation.

# 3082 4.3.7 job-state (type1 enum)

3073

3083

3084

3085

3086

3087

3088

3099

This REQUIRED attribute identifies the current state of the job. Even though the IPP protocol defines seven values for job states (plus the out-of-band 'unknown' value - see Section 4.1), implementations only need to support those states which are appropriate for the particular implementation. In other words, a Printer supports only those job states implemented by the output device and available to the Printer object implementation.

#### Standard enum values are:

3089 3090	Values	Symbolic Name and Description
3091	3'	'pending': The job is a candidate to start processing, but is not yet processing.
3092		
3093	'4'	'pending-held': The job is not a candidate for processing for any number of reasons but
3094		will return to the 'pending' state as soon as the reasons are no longer present. The
3095		job's "job-state-reason" attribute MUST indicate why the job is no longer a
3096		candidate for processing.
3097		
3098	'5'	'processing': One or more of:

3100		1. the job is using, or is attempting to use, one or more purely software processes
3101		that are analyzing, creating, or interpreting a PDL, etc.,
3102		2. the job is using, or is attempting to use, one or more hardware devices that are
3103		interpreting a PDL, making marks on a medium, and/or performing finishing,
3104		such as stapling, etc.,
3105		3. the Printer object has made the job ready for printing, but the output device is
3106		not yet printing it, either because the job hasn't reached the output device or
3107		because the job is queued in the output device or some other spooler, awaiting the
3108		output device to print it.
3109		
3110		When the job is in the 'processing' state, the entire job state includes the detailed
3111		status represented in the printer's "printer-state", "printer-state-reasons", and
3112		"printer-state-message" attributes.
3112		printer-state-message attributes.
3113		Implementations MAY, though they NEED NOT, include additional values in the
3114		job's "job-state-reasons" attribute to indicate the progress of the job, such as
3115		adding the 'job-printing' value to indicate when the output device is actually
3116		making marks on paper and/or the 'processing-to-stop-point' value to indicate that
3117		the IPP object is in the process of canceling or aborting the job. Most
3118		implementations won't bother with this nuance.
3119		1
3119	<b>'</b> 6'	'processing-stopped': The job has stopped while processing for any number of reasons
	U	and will return to the 'processing' state as soon as the reasons are no longer
3121		
3122		present.
3123		
3124		The job's "job-state-reason" attribute MAY indicate why the job has stopped
3125		processing. For example, if the output device is stopped, the 'printer-stopped'
3126		value MAY be included in the job's "job-state-reasons" attribute.
3127		
3128		Note: When an output device is stopped, the device usually indicates its condition
3129		in human readable form locally at the device. A client can obtain more complete
3130		device status remotely by querying the Printer object's "printer-state", "printer-
		state-reasons" and "printer-state-message" attributes.
3131		state-reasons and printer-state-message attributes.
3132		
3133	7'	'canceled': The job has been canceled by a Cancel-Job operation and the Printer object
3134		has completed canceling the job and all job status attributes have reached their
3135		final values for the job. While the Printer object is canceling the job, the job
3136		remains in its current state, but the job's "job-state-reasons" attribute SHOULD
3137		contain the 'processing-to-stop-point' value and one of the 'canceled-by-user',
3138		'canceled-by-operator', or 'canceled-at-device' value. When the job moves to the
3139		'canceled' state, the 'processing-to-stop-point' value, if present, MUST be
3140		removed, but the 'canceled-by-xxx', if present, MUST remain.
3141		2

**'**8' 'aborted': The job has been aborted by the system, usually while the job was in the 'processing' or 'processing-stopped' state and the Printer has completed aborting the job and all job status attributes have reached their final values for the job. While the Printer object is aborting the job, the job remains in its current state, but the job's "job-state-reasons" attribute SHOULD contain the 'processing-to-stop-point' and 'aborted-by-system' values. When the job moves to the 'aborted' state, the 'processing-to-stop-point' value, if present, MUST be removed, but the 'aborted-by-system' value, if present, MUST remain. 

'9' 'completed': The job has completed successfully or with warnings or errors after processing and all of the job media sheets have been successfully stacked in the appropriate output bin(s) and all job status attributes have reached their final values for the job. The job's "job-state-reasons" attribute SHOULD contain one of: 'completed-successfully', 'completed-with-warnings', or 'completed-with-errors' values.

The final value for this attribute MUST be one of: 'completed', 'canceled', or 'aborted' before the Printer removes the job altogether. The length of time that jobs remain in the 'canceled', 'aborted', and 'completed' states depends on implementation. See section 4.3.7.1.

The following figure shows the normal job state transitions.

Normally a job progresses from left to right. Other state transitions are unlikely, but are not forbidden.
Not shown are the transitions to the 'canceled' state from the 'pending', 'pending-held', and 'processing-stopped' states.

Jobs reach one of the three terminal states: 'completed', 'canceled', or 'aborted', after the jobs have completed all activity, including stacking output media, after the jobs have completed all activity, and all job status attributes have reached their final values for the job.

Note: As with all other IPP attributes, if the implementation can not determine the correct value for this attribute, it SHOULD respond with the out-of-band value 'unknown' (see section 4.1) rather than try to guess at some possibly incorrect value and give the end user the wrong impression about the state of the Job object. For example, if the implementation is just a gateway into some printing system that does not provide detailed status about the print job, the IPP Job object's state might literally be 'unknown'.

- 3181 4.3.7.1 Partitioning of Job States
- This section partitions the 7 job states into phases: Job Not Completed, Job Retention, Job History, and
- Job Removal. This section also explains the 'job-restartable' value of the "job-state-reasons" Job
- Description attribute for use with the Restart-Job operation.
- Job Not Completed: When a job is in the 'pending', 'pending-held', 'processing', or 'processing-stopped'
- states, the job is not completed.
- Job Retention: When a job enters one of the three terminal job states: 'completed', 'canceled', or
- 3188 'aborted', the IPP Printer object MAY "retain" the job in a restartable condition for an implementation-
- defined time period. This time period MAY be zero seconds and MAY depend on the terminal job state.
- This phase is called Job Retention. While in the Job Retention phase, the job's document data is retained
- and a client may restart the job using the Restart-Job operation. If the IPP object supports the "job-state-
- reasons" attribute and the Restart-Job operation, then it SHOULD indicate that the job is restartable by
- adding the 'job-restartable' value to the job's "job-state-reasons" attribute (see Section 4.3.8) during the
- Job Retention phase.
- Job History: After the Job Retention phase expires for a job, the Printer object deletes the document
- data for the job and the job becomes part of the Job History. The Printer object MAY also delete any
- number of the job attributes. Since the job is no longer restartable, the Printer object MUST remove the
- job-restartable' value from the job's "job-state-reasons" attribute, if present.
- Job Removal: After the job has remained in the Job History for an implementation-defined time, such as
- when the number of jobs exceeds a fixed number or after a fixed time period (which MAY be zero
- seconds), the IPP Printer removes the job from the system.
- Using the Get-Jobs operation and supplying the 'not-completed' value for the "which-jobs" operation
- attribute, a client is requesting jobs in the Job Not Completed phase. Using the Get-Jobs operation and
- supplying the 'completed' value for the "which-jobs" operation attribute, a client is requesting jobs in the
- Job Retention and Job History phases. Using the Get-Job-Attributes operation, a client is requesting a
- job in any phase except Job Removal. After Job Removal, the Get-Job-Attributes and Get-Jobs
- operations no longer are capable of returning any information about a job.
- 4.3.8 job-state-reasons (1setOf type2 keyword)
- This attribute provides additional information about the job's current state, i.e., information that
- augments the value of the job's "job-state" attribute.
- Implementation of these values is OPTIONAL, i.e., a Printer NEED NOT implement them, even if (1)
- 3212 the output device supports the functionality represented by the reason and (2) is available to the Printer
- object implementation. These values MAY be used with any job state or states for which the reason
- makes sense. Furthermore, when implemented, the Printer MUST return these values when the reason
- applies and MUST NOT return them when the reason no longer applies whether the value of the Job's
- "job-state" attribute changed or not. When the Job does not have any reasons for being in its current
- state, the value of the Job's "job-state-reasons" attribute MUST be 'none'.

- Note: While values cannot be added to the 'job-state' attribute without impacting deployed clients that take actions upon receiving "job-state" values, it is the intent that additional "job-state-reasons" values can be defined and registered without impacting such deployed clients. In other words, the "job-state-reasons" attribute is intended to be extensible.
- The following standard keyword values are defined. For ease of understanding, the values are presented in the order in which the reasons are likely to occur (if implemented), starting with the job-incoming value:
  - 'none': There are no reasons for the job's current state.
    - job-incoming': The Create-Job operation has been accepted by the Printer, but the Printer is expecting additional Send-Document and/or Send-URI operations and/or is accessing/accepting document data.
    - 'submission-interrupted': The job was not completely submitted for some unforeseen reason, such as: (1) the Printer has crashed before the job was closed by the client, (2) the Printer or the document transfer method has crashed in some non-recoverable way before the document data was entirely transferred to the Printer, (3) the client crashed or failed to close the job before the time-out period. See section 4.4.28.
    - job-outgoing': The Printer is transmitting the job to the output device.
    - 'job-hold-until-specified': The value of the job's "job-hold-until" attribute was specified with a time period that is still in the future. The job MUST NOT be a candidate for processing until this reason is removed and there are no other reasons to hold the job.
    - 'resources-are-not-ready': At least one of the resources needed by the job, such as media, fonts, resource objects, etc., is not ready on any of the physical printer's for which the job is a candidate. This condition MAY be detected when the job is accepted, or subsequently while the job is pending or processing, depending on implementation. The job may remain in its current state or be moved to the 'pending-held' state, depending on implementation and/or job scheduling policy.
    - 'printer-stopped-partly': The value of the Printer's "printer-state-reasons" attribute contains the value 'stopped-partly'.
    - 'printer-stopped': The value of the Printer's "printer-state" attribute is 'stopped'.
    - job-interpreting': Job is in the 'processing' state, but more specifically, the Printer is interpreting the document data.
    - job-queued': Job is in the 'processing' state, but more specifically, the Printer has queued the document data.
    - job-transforming': Job is in the 'processing' state, but more specifically, the Printer is interpreting document data and producing another electronic representation.
    - 'job-printing': The output device is marking media. This value is useful for Printers which spend a great deal of time processing (1) when no marking is happening and then want to show that marking is now happening or (2) when the job is in the process of being canceled or aborted while the job remains in the 'processing' state, but the marking has not yet stopped so that impression or sheet counts are still increasing for the job.
    - 'job-canceled-by-user': The job was canceled by the owner of the job using the Cancel-Job request, i.e., by a user whose authenticated identity is the same as the value of the originating user that created the Job object, or by some other authorized end-user, such as a member of the job owner's security group.

3262

3263

3264

3265

3266

3267

3268

3269

3270

3271

3272

3273 3274

3275

3276

3277

3278 3279

3280

3281

3282

3283

3284

3285

3286

3287

3288

3289

job-canceled-by-operator': The job was canceled by the operator using the Cancel-Job request, i.e., by a user who has been authenticated as having operator privileges (whether local or remote). If the security policy is to allow anyone to cancel anyone's job, then this value may be used when the job is canceled by other than the owner of the job. For such a security policy, in effect, everyone is an operator as far as canceling jobs with IPP is concerned.

job-canceled-at-device: The job was canceled by an unidentified local user, i.e., a user at a console at the device.

'aborted-by-system': The job (1) is in the process of being aborted, (2) has been aborted by the system and placed in the 'aborted' state, or (3) has been aborted by the system and placed in the 'pending-held' state, so that a user or operator can manually try the job again.

'processing-to-stop-point': The requester has issued a Cancel-job operation or the Printer object has aborted the job, but is still performing some actions on the job until a specified stop point occurs or job termination/cleanup is completed.

This reason is recommended to be used in conjunction with the 'processing' job state to indicate that the Printer object is still performing some actions on the job while the job remains in the 'processing' state. After all the job's job description attributes have stopped incrementing, the Printer object moves the job from the 'processing' state to the 'canceled' or 'aborted' job states.

'service-off-line': The Printer is off-line and accepting no jobs. All 'pending' jobs are put into the 'pending-held' state. This situation could be true if the service's or document transform's input is impaired or broken.

job-completed-successfully. The job completed successfully.

job-completed-with-warnings': The job completed with warnings.

job-completed-with-errors': The job completed with errors (and possibly warnings too).

job-restartable' - This job is retained (see section 4.3.7.1) and is currently able to be restarted using the Restart-Job operation (see section 3.3.7). If job-restartable' is a value of the job's job-state-reasons' attribute, then the IPP object MUST accept a Restart-Job operation for that job.

#### 4.3.9 job-state-message (text(MAX))

This attribute specifies information about the "job-state" and "job-state-reasons" attributes in human readable text. If the Printer object supports this attribute, the Printer object MUST be able to generate this message in any of the natural languages identified by the Printer's "generated-natural-language-supported" attribute (see the "attributes-natural-language" operation attribute specified in Section 3.1.4.1).

Note: the value SHOULD NOT contain additional information not contained in the values of the "jobstate" and "job-states-reasons" attributes, such as interpreter error information. Otherwise, application programs might attempt to parse the (localized text). For such additional information such as interpreter errors for application program consumption, a new attribute with keyword values, needs to be developed and registered.

- 3300 4.3.10 number-of-documents (integer(0:MAX))
- This attribute indicates the number of documents in the job, i.e., the number of Send-Document, Send-
- URI, Print-Job, or Print-URI operations that the Printer has accepted for this job, regardless of whether
- the document data has reached the Printer object or not.
- Implementations supporting the OPTIONAL Create-Job/Send-Document/Send-URI operations
- 3305 SHOULD support this attribute so that clients can query the number of documents in each job.
- 3306 4.3.11 output-device-assigned (name(127))
- This attribute identifies the output device to which the Printer object has assigned this job. If an output
- device implements an embedded Printer object, the Printer object NEED NOT set this attribute. If a
- print server implements a Printer object, the value MAY be empty (zero-length string) or not returned
- until the Printer object assigns an output device to the job. This attribute is particularly useful when a
- single Printer object support multiple devices (so called "fan-out").
- 4.3.12 time-at-creation (integer(0:MAX))
- This attribute indicates the point in time at which the Job object was created. In order to populate this
- attribute, the Printer object uses the value in its "printer-up-time" attribute at the time the Job object is
- 3315 created.
- 3316 4.3.13 time-at-processing (integer(0:MAX))
- This attribute indicates the point in time at which the Job object began processing. In order to populate
- this attribute, the Printer object uses the value in its "printer-up-time" attribute at the time the Job object
- is moved into the 'processing' state for the first time.
- 3320 4.3.14 time-at-completed (integer(0:MAX))
- This attribute indicates the point in time at which the Job object completed (or was cancelled or aborted).
- In order to populate this attribute, the Printer object uses the value in its "printer-up-time" attribute at the
- time the Job object is moved into the 'completed' or 'canceled' or 'aborted' state.
- 3324 4.3.15 number-of-intervening-jobs (integer(0:MAX))
- This attribute indicates the number of jobs that are "ahead" of this job in the relative chronological order
- of expected time to complete (i.e., the current scheduled order). For efficiency, it is only necessary to
- calculate this value when an operation is performed that requests this attribute.
- 3328 4.3.16 job-message-from-operator (text(127))
- This attribute provides a message from an operator, system administrator or "intelligent" process to
- indicate to the end user the reasons for modification or other management action taken on a job.

- 3331 4.3.17 job-k-octets (integer(0:MAX))
- This attribute specifies the total size of the document(s) in K octets, i.e., in units of 1024 octets requested
- to be processed in the job. The value MUST be rounded up, so that a job between 1 and 1024 octets
- 3334 MUST be indicated as being 1, 1025 to 2048 MUST be 2, etc.
- This value MUST NOT include the multiplicative factors contributed by the number of copies specified
- by the "copies" attribute, independent of whether the device can process multiple copies without making
- multiple passes over the job or document data and independent of whether the output is collated or not.
- Thus the value is independent of the implementation and indicates the size of the document(s) measured
- in K octets independent of the number of copies.
- This value MUST also not include the multiplicative factor due to a copies instruction embedded in the
- document data. If the document data actually includes replications of the document data, this value will
- include such replication. In other words, this value is always the size of the source document data, rather
- than a measure of the hardcopy output to be produced.
- Note: This attribute and the following two attributes ("job-impressions" and "job-media-sheets") are not
- intended to be counters; they are intended to be useful routing and scheduling information if known. For
- these three attributes, the Printer object may try to compute the value if it is not supplied in the create
- request. Even if the client does supply a value for these three attributes in the create request, the Printer
- object MAY choose to change the value if the Printer object is able to compute a value which is more
- accurate than the client supplied value. The Printer object may be able to determine the correct value for
- these three attributes either right at job submission time or at any later point in time.
- 4.3.18 job-impressions (integer(0:MAX))
- This attribute specifies the total size in number of impressions of the document(s) being submitted (see
- the definition of impression in section 13.2.5).
- As with "job-k-octets", this value MUST NOT include the multiplicative factors contributed by the
- number of copies specified by the "copies" attribute, independent of whether the device can process
- multiple copies without making multiple passes over the job or document data and independent of
- whether the output is collated or not. Thus the value is independent of the implementation and reflects
- the size of the document(s) measured in impressions independent of the number of copies.
- As with "job-k-octets", this value MUST also not include the multiplicative factor due to a copies
- instruction embedded in the document data. If the document data actually includes replications of the
- document data, this value will include such replication. In other words, this value is always the number
- of impressions in the source document data, rather than a measure of the number of impressions to be
- produced by the job.
- See the Note in the "job-k-octets" attribute that also applies to this attribute.

- 3365 4.3.19 job-media-sheets (integer(0:MAX))
- This attribute specifies the total number of media sheets to be produced for this job.
- Unlike the "job-k-octets" and the "job-impressions" attributes, this value MUST include the
- multiplicative factors contributed by the number of copies specified by the "copies" attribute and a
- 3369 'number of copies' instruction embedded in the document data, if any. This difference allows the system
- administrator to control the lower and upper bounds of both (1) the size of the document(s) with "job-k-
- octets-supported" and "job-impressions-supported" and (2) the size of the job with "job-media-sheets-
- 3372 supported".
- See the Note in the "job-k-octets" attribute that also applies to this attribute.
- 4.3.20 job-k-octets-processed (integer(0:MAX))
- This attribute specifies the total number of octets processed in K octets, i.e., in units of 1024 octets so
- far. The value MUST be rounded up, so that a job between 1 and 1024 octets inclusive MUST be
- indicated as being 1, 1025 to 2048 inclusive MUST be 2, etc.
- For implementations where multiple copies are produced by the interpreter with only a single pass over
- the data, the final value MUST be equal to the value of the "job-k-octets" attribute. For implementations
- where multiple copies are produced by the interpreter by processing the data for each copy, the final
- value MUST be a multiple of the value of the "job-k-octets" attribute.
- Note: This attribute and the following two attributes ("job-impressions-completed" and "job-sheets-
- completed") are intended to be counters. That is, the value for a job that has not started processing
- MUST be 0. When the job's "job-state" is 'processing' or 'processing-stopped', this value is intended to
- contain the amount of the job that has been processed to the time at which the attributes are requested.
- 3386 4.3.21 job-impressions-completed (integer(0:MAX))
- This job attribute specifies the number of impressions completed for the job so far. For printing devices,
- the impressions completed includes interpreting, marking, and stacking the output.
- See the note in "job-k-octets-processed" which also applies to this attribute.
- 3390 4.3.22 job-media-sheets-completed (integer(0:MAX))
- This job attribute specifies the media-sheets completed marking and stacking for the entire job so far
- whether those sheets have been processed on one side or on both.
- See the note in "job-k-octets-processed" which also applies to this attribute.

- 3394 4.3.23 attributes-charset (charset)
- This REQUIRED attribute is populated using the value in the client supplied "attributes-charset"
- attribute in the create request. It identifies the charset (coded character set and encoding method) used
- by any Job attributes with attribute syntax 'text' and 'name' that were supplied by the client in the create
- request. See Section 3.1.4 for a complete description of the "attributes-charset" operation attribute.
- This attribute does not indicate the charset in which the 'text' and 'name' values are stored internally in
- the Job object. The internal charset is implementation-defined. The IPP object MUST convert from
- whatever the internal charset is to that being requested in an operation as specified in Section 3.1.4.
- 3402 4.3.24 attributes-natural-language (naturalLanguage)
- This REQUIRED attribute is populated using the value in the client supplied "attributes-natural-
- language" attribute in the create request. It identifies the natural language used for any Job attributes
- with attribute syntax 'text' and 'name' that were supplied by the client in the create request. See Section
- 3.1.4 for a complete description of the "attributes-natural-language" operation attribute. See Sections
- 4.1.1.2 and 4.1.2.2 for how a Natural Language Override may be supplied explicitly for each 'text' and
- 3408 'name' attribute value that differs from the value identified by the "attributes-natural-language" attribute.
- 3409 4.4 Printer Description Attributes
- These attributes form the attribute group called "printer-description". The following table summarizes
- these attributes, their syntax, and whether or not they are REQUIRED for a Printer object to support. If
- they are not indicated as REQUIRED, they are OPTIONAL. The maximum size in octets for 'text' and
- 3413 'name' attributes is indicated in parenthesizes.
- Note: How these attributes are set by an Administrator is outside the scope of this IPP/1.1 document.

Attribute	Syntax	REQUIRED?
printer-uri-supported	lsetOf uri	REQUIRED
uri-security-supported	1setOf type2 keyword	+   REQUIRED
printer-name	name (127)	+   REQUIRED
printer-location	text (127)	+   
printer-info	text (127)	<u>+</u>
printer-more-info	uri	<u>+</u>
printer-driver-installer	uri	   
printer-make-and-model	text (127)	 
printer-more-info-   manufacturer	uri	
printer-state	type1 enum	REQUIREI
printer-state-reasons	1setOf type2 keyword	   
printer-state-message	text (MAX)	 
operations-supported	1setOf type2 enum	REQUIREI
charset-configured	charset	REQUIREI
charset-supported	1setOf charset	REQUIREI
natural-language-configured	naturalLanguage	REQUIREI
generated-natural-language-  supported	lsetOf naturalLanguage	REQUIREI
document-format-default	mimeMediaType	REQUIREI
document-format-supported	lsetOf mimeMediaType	REQUIREI
printer-is-accepting-jobs	boolean	REQUIREI
queued-job-count	integer (0:MAX)	+  RECOMMENDI
printer-message-from-   operator	text (127)	+   

3465   3466   4 3467   3468   3469   4 3470   3470	color-supported	boolean	
	reference-uri-schemes- supported	lsetOf uriScheme	
	pdl-override-supported	type2 keyword	REQUIRED
3471 - 3472 3473 -	printer-up-time	integer (1:MAX)	REQUIRED
3473 3474 3475	printer-current-time	dateTime	
3476	multiple-operation-time-out	integer (1:MAX)	
3477 + 3478   3479 + 3480   3481 + 3482   3483 + 3484   3485 + 3486   3487 + 3488   3489 +	compression-supported	1setOf type3 keyword	
	job-k-octets-supported	rangeOfInteger (0:MAX)	
	job-impressions-supported	rangeOfInteger (0:MAX)	
	job-media-sheets-supported	rangeOfInteger (0:MAX)	
	pages-per-minute	integer(0:MAX)	
	pages-per-minute-color	integer(0:MAX)	

### 4.4.1 printer-uri-supported (1setOf uri)

This REQUIRED Printer attribute contains at least one URI for the Printer object. It OPTIONALLY contains more than one URI for the Printer object. An administrator determines a Printer object's URI(s) and configures this attribute to contain those URIs by some means outside the scope of this IPP/1.1 document. The precise format of this URI is implementation dependent and depends on the protocol. See the next section for a description "uri-security-supported" which is the REQUIRED companion attribute to this "printer-uri-supported" attribute. See section 2.4 on Printer object identity and section 8.2 on security and URIs for more information.

### 4.4.2 uri-security-supported (1setOf type2 keyword)

This REQUIRED Printer attribute MUST have the same cardinality (contain the same number of values) as the "printer-uri-supported" attribute. This attribute identifies the security mechanisms used for each URI listed in the "printer-uri-supported" attribute. The "i th" value in "uri-security-supported" corresponds to the "i th" value in "printer-uri-supported" and it describes the security mechanisms used for accessing the Printer object via that URI. The following standard values are defined:

'none': There are no secure communication channel protocols in use for the given URI. 'ssl3': SSL3 [SSL] is the secure communications channel protocol in use for the given URI. For use in IPP/1.0.

3508 'tls': TLS [RFC2246] is the secure communications channel protocol in use for the given URI. For use in IPP/1.1.

3510

3513

3514

Consider the following example. For a single Printer object, an administrator configures the "printer-urisupported" and "uri-security-supported" attributes as follows:

"printer-uri-supported": 'xxx://acme.com/open-use-printer', 'xxx://acme.com/restricted-use-printer', 'xxx://acme.com/private-printer'

"uri-security-supported": 'none', 'none', 'tls'

3515 3516

3517

3518

3520

3521

3522

3523

3524

3525

3526

3527

3528

3529

3530

3531

3532

3533

3534

Note: 'xxx' is not a valid scheme. See the IPP/1.1 "Transport and Encoding" specification [ipp-pro] for the actual URI schemes to be used in object target attributes.

In this case, one Printer object has three URIs.

- For the first URI, 'xxx://acme.com/open-use-printer', the value 'none' in "uri-security-supported" indicates that there is no secure channel protocol configured to run under HTTP. The name implies that there is no Basic or Digest authentication being used, but it is up to the client to determine that while using HTTP underneath the IPP application protocol.
- For the second URI, 'xxx://acme.com/restricted-use-printer', the value 'none' in "uri-security-supported" indicates that there is no secure channel protocol configured to run under HTTP. In this case, although the name does imply that there is some sort of Basic or Digest authentication being used within HTTP, it is up to the client to determine that while using HTTP and by processing any '401 Unauthorized' HTTP error messages.
- For the third URI, 'xxx://acme.com/private-printer', the value 'tls' in "uri-security-supported" indicates that TLS is being used to secure the channel. The client SHOULD be prepared to use TLS framing to negotiate an acceptable ciphersuite to use while communicating with the Printer object. In this case, the name implies the use of a secure communications channel, but the fact is made explicit by the presence of the 'tls' value in "uri-security-supported". The client does not need to resort to understanding which security it must use by following naming conventions or by parsing the URI to determine which security mechanisms are implied.

3535 3536 3537

3538

3539

3540

3541

It is expected that many IPP Printer objects will be configured to support only one channel (either configured to use TLS access or not), and will therefore only ever have one URI listed in the "printer-uri-supported" attribute. No matter the configuration of the Printer object (whether it has only one URI or more than one URI), a client MUST supply only one URI in the target "printer-uri" operation attribute.

4.4.3 printer-name (name(127))

This REQUIRED Printer attribute contains the name of the Printer object. It is a name that is more enduser friendly than a URI. An administrator determines a printer's name and sets this attribute to that name. This name may be the last part of the printer's URI or it may be unrelated. In non-US-English locales, a name may contain characters that are not allowed in a URI.

- 4.4.4 printer-location (text(127))
- This Printer attribute identifies the location of the device. This could include things like: "in Room
- 3548 123A, second floor of building XYZ".
- 3549 4.4.5 printer-info (text(127))
- This Printer attribute identifies the descriptive information about this Printer object. This could include
- things like: "This printer can be used for printing color transparencies for HR presentations", or "Out of
- courtesy for others, please print only small (1-5 page) jobs at this printer", or even "This printer is going
- away on July 1, 1997, please find a new printer".
- 3554 4.4.6 printer-more-info (uri)
- This Printer attribute contains a URI used to obtain more information about this specific Printer object.
- For example, this could be an HTTP type URI referencing an HTML page accessible to a Web Browser.
- The information obtained from this URI is intended for end user consumption. Features outside the
- scope of IPP can be accessed from this URI. The information is intended to be specific to this printer
- instance and site specific services (e.g. job pricing, services offered, end user assistance). The device
- manufacturer may initially populate this attribute.
- 3561 4.4.7 printer-driver-installer (uri)
- This Printer attribute contains a URI to use to locate the driver installer for this Printer object. This
- attribute is intended for consumption by automata. The mechanics of print driver installation is outside
- the scope of this IPP/1.1 document. The device manufacturer may initially populate this attribute.
- 3565 4.4.8 printer-make-and-model (text(127))
- This Printer attribute identifies the make and model of the device. The device manufacturer may
- initially populate this attribute.
- 3568 4.4.9 printer-more-info-manufacturer (uri)
- This Printer attribute contains a URI used to obtain more information about this type of device. The
- information obtained from this URI is intended for end user consumption. Features outside the scope of
- 3571 IPP can be accessed from this URI (e.g., latest firmware, upgrades, print drivers, optional features
- available, details on color support). The information is intended to be germane to this printer without
- regard to site specific modifications or services. The device manufacturer may initially populate this
- 3574 attribute.

3575 4.4.10 printer-state (type1 enum)

This REQUIRED Printer attribute identifies the current state of the device. The "printer-state reasons" attribute augments the "printer-state" attribute to give more detailed information about the Printer in the given printer state.

A Printer object need only update this attribute before responding to an operation which requests the attribute; the Printer object NEED NOT update this attribute continually, since asynchronous event notification is not part of IPP/1.1. A Printer NEED NOT implement all values if they are not applicable to a given implementation.

The following standard enum values are defined:

# Value Symbolic Name and Description

- "idle': If a Printer receives a job (whose required resources are ready) while in this state, such a job MUST transit into the 'processing' state immediately. If the "printer-state-reasons" attribute contains any reasons, they MUST be reasons that would not prevent a job from transiting into the 'processing' state immediately, e.g., 'toner-low'. Note: if a Printer controls more than one output device, the above definition implies that a Printer is 'idle' if at least one output device is idle.
- '4' 'processing': If a Printer receives a job (whose required resources are ready) while in this state, such a job MUST transit into the 'pending' state immediately. Such a job MUST transit into the 'processing' state only after jobs ahead of it complete. If the "printer-state-reasons" attribute contains any reasons, they MUST be reasons that do not prevent the current job from printing, e.g. 'toner-low'. Note: if a Printer controls more than one output device, the above definition implies that a Printer is 'processing' if at least one output device is processing, and none is idle.
  - '5' 'stopped': If a Printer receives a job (whose required resources are ready) while in this state, such a job MUST transit into the 'pending' state immediately. Such a job MUST transit into the 'processing' state only after some human fixes the problem that stopped the printer and after jobs ahead of it complete processing. If supported, the "printer-state-reasons" attribute MUST contain at least one reason, e.g. 'media-jam', which prevents it from either processing the current job or transitioning a 'pending' job to the 'processing' state.

Note: if a Printer controls more than one output device, the above definition implies that a Printer is 'stopped' only if all output devices are stopped. Also, it is tempting to define 'stopped' as when a sufficient number of output devices are stopped and leave it to an implementation to define the sufficient number. But such a rule complicates the definition of 'stopped' and 'processing'. For example, with this alternate definition of 'stopped', a job can move from 'pending' to 'processing' without human intervention, even though the Printer is stopped.

3622

3623

3624

3625

3626

3627

3628

3629 3630

3639

3640

3641

3642

3643

3644

3645

3646

3647

3648

3649

3650

3651

3652

3653

3654

3655

3656

3657

- 3617 4.4.11 printer-state-reasons (1setOf type2 keyword)
- This Printer attribute supplies additional detail about the device's state.
- Each keyword value MAY have a suffix to indicate its level of severity. The three levels are: report (least severe), warning, and error (most severe).
  - '-report': This suffix indicates that the reason is a "report". An implementation may choose to omit some or all reports. Some reports specify finer granularity about the printer state; others serve as a precursor to a warning. A report MUST contain nothing that could affect the printed output.
  - '-warning': This suffix indicates that the reason is a "warning". An implementation may choose to omit some or all warnings. Warnings serve as a precursor to an error. A warning MUST contain nothing that prevents a job from completing, though in some cases the output may be of lower quality.
  - '-error': This suffix indicates that the reason is an "error". An implementation MUST include all errors. If this attribute contains one or more errors, printer MUST be in the stopped state.

If the implementation does not add any one of the three suffixes, all parties MUST assume that the reason is an "error".

If a Printer object controls more than one output device, each value of this attribute MAY apply to one or more of the output devices. An error on one output device that does not stop the Printer object as a whole MAY appear as a warning in the Printer's "printer-state-reasons attribute". If the "printer-state" for such a Printer has a value of 'stopped', then there MUST be an error reason among the values in the "printer-state-reasons" attribute.

- 3638 The following standard keyword values are defined:
  - 'other': The device has detected an error other than one listed in this document.
  - 'none': There are not reasons. This state reason is semantically equivalent to "printer-state-reasons" without any value.
  - 'media-needed': A tray has run out of media.
  - 'media-jam': The device has a media jam.
    - 'moving-to-paused': Someone has paused the Printer object using the Pause-Printer operation (see section 3.2.7) or other means, but the device(s) are taking an appreciable time to stop. Later, when all output has stopped, the "printer-state" becomes 'stopped', and the 'paused' value replaces the 'moving-to-paused' value in the "printer-state-reasons" attribute.
    - 'paused': Someone has paused the Printer object using the Pause-Printer operation (see section 3.2.7) or other means and the Printer object's "printer-state" is 'stopped'. In this state, a Printer MUST NOT produce printed output, but it MUST perform other operations requested by a client. If a Printer had been printing a job when the Printer was paused, the Printer MUST resume printing that job when the Printer is no longer paused and leave no evidence in the printed output of such a pause.
  - 'shutdown': Someone has removed a Printer object from service, and the device may be powered down or physically removed. In this state, a Printer object MUST NOT produce printed output, and unless the Printer object is realized by a print server that is still active, the Printer object MUST perform no other operations requested by a client, including returning this value. If a

3659

3660

3661

3662

3663

3664

3665

3666

3667

3668

3669

3670

3671

3672

3673

3674

3675

3676

3678

3679

3680

3681

3684

3687

3692

3694

3695

Printer object had been printing a job when it was shutdown, the Printer NEED NOT resume printing that job when the Printer is no longer shutdown. If the Printer resumes printing such a job, it may leave evidence in the printed output of such a shutdown, e.g. the part printed before the shutdown may be printed a second time after the shutdown.

'connecting-to-device': The Printer object has scheduled a job on the output device and is in the process of connecting to a shared network output device (and might not be able to actually start printing the job for an arbitrarily long time depending on the usage of the output device by other servers on the network).

'timed-out': The server was able to connect to the output device (or is always connected), but was unable to get a response from the output device.

'stopping': The Printer object is in the process of stopping the device and will be stopped in a while. When the device is stopped, the Printer object will change the Printer object's state to 'stopped'. The 'stopping-warning' reason is never an error, even for a Printer with a single output device. When an output-device ceases accepting jobs, the Printer will have this reason while the output device completes printing.

'stopped-partly': When a Printer object controls more than one output device, this reason indicates that one or more output devices are stopped. If the reason is a report, fewer than half of the output devices are stopped. If the reason is a warning, fewer than all of the output devices are stopped.

3677 'toner-low': The device is low on toner.

'toner-empty': The device is out of toner.

'spool-area-full': The limit of persistent storage allocated for spooling has been reached.

'cover-open': One or more covers on the device are open.

"interlock-open": One or more interlock devices on the printer are unlocked.

'door-open': One or more doors on the device are open.

3683 "input-tray-missing": One or more input trays are not in the device.

'media-low': At least one input tray is low on media.

3685 'media-empty': At least one input tray is empty.

output-tray-missing': One or more output trays are not in the device

'output-area-almost-full': One or more output area is almost full (e.g. tray, stacker, collator).

output-area-full': One or more output area is full. (e.g. tray, stacker, collator)

3689 'marker-supply-low': The device is low on at least one marker supply. (e.g. toner, ink, ribbon)

3690 'marker-supply-empty: The device is out of at least one marker supply. (e.g. toner, ink, ribbon)

3691 'marker-waste-almost-full': The device marker supply waste receptacle is almost full.

'marker-waste-full': The device marker supply waste receptacle is full.

3693 'fuser-over-temp': The fuser temperature is above normal.

'fuser-under-temp': The fuser temperature is below normal.

'opc-near-eol': The optical photo conductor is near end of life.

'opc-life-over': The optical photo conductor is no longer functioning.

'developer-low': The device is low on developer.

3698 'developer-empty: The device is out of developer.

3699 "interpreter-resource-unavailable': An interpreter resource is unavailable (i.e. font, form)

- 3701 4.4.12 printer-state-message (text(MAX))
- This Printer attribute specifies the additional information about the printer state and printer state reasons
- in human readable text. If the Printer object supports this attribute, the Printer object MUST be able to
- generate this message in any of the natural languages identified by the Printer's "generated-natural-
- language-supported" attribute (see the "attributes-natural-language" operation attribute specified in
- 3706 Section 3.1.4.1).
- 4.4.13 operations-supported (1setOf type2 enum)
- 3708 This REQUIRED Printer attribute specifies the set of supported operations for this Printer object and
- 3709 contained Job objects.
- Note: This attribute is encoded as any other enum attribute syntax according to [IPP-PRO] as 32-bits.
- However, all 32-bit enum values for this attribute MUST NOT exceed 0x00008FFF, since these same
- values are also passed in two octets in the "operation-id" parameter (see section 3.1.1) in each Protocol
- request with the two high order octets omitted in order to indicate the operation being performed [IPP-
- 3714 PRO].
- The following standard enum and "operation-id" (see section 3.1.2) values are defined:

3716	Value	Operation Name
3717		
3718		
3719	0x0000	reserved, not used
3720	0x0001	reserved, not used
3721	0x0002	Print-Job
3722	0x0003	Print-URI
3723	0x0004	Validate-Job
3724	0x0005	Create-Job
3725	0x0006	Send-Document
3726	0x0007	Send-URI
3727	0x0008	Cancel-Job
3728	0x0009	Get-Job-Attributes
3729	0x000A	Get-Jobs
3730	0x000B	Get-Printer-Attributes
3731	0x000C	Hold-Job
3732	0x000D	Release-Job
3733	0x000E	Restart-Job
3734	0x000F	reserved for a future operation
3735	0x0010	Pause-Printer
3736	0x0011	Resume-Printer
3737	0x0012	Purge-Jobs
3738	0x00013-0x3FFF	reserved for future operations
3739	0x4000-0x8FFF	reserved for private extensions
3740		

- This allows for certain vendors to implement private extensions that are guaranteed to not conflict with
- future registered extensions. However, there is no guarantee that two or more private extensions will not
- 3743 conflict.
- 3744 4.4.14 charset-configured (charset)
- This REQUIRED Printer attribute identifies the charset that the Printer object has been configured to
- 3746 represent 'text' and 'name' Printer attributes that are set by the operator, system administrator, or
- manufacturer, i.e., for "printer-name" (name), "printer-location" (text), "printer-info" (text), and "printer-
- make-and-model" (text). Therefore, the value of the Printer object's "charset-configured" attribute
- 3749 MUST also be among the values of the Printer object's "charset-supported" attribute.
- 3750 4.4.15 charset-supported (1setOf charset)
- This REQUIRED Printer attribute identifies the set of charsets that the Printer and contained Job objects
- support in attributes with attribute syntax 'text' and 'name'. At least the value 'utf-8' MUST be present,
- since IPP objects MUST support the UTF-8 [RFC2279] charset. If a Printer object supports a charset, it
- means that for all attributes of syntax 'text' and 'name' the IPP object MUST (1) accept the charset in
- requests and return the charset in responses as needed.
- 3756 If more charsets than UTF-8 are supported, the IPP object MUST perform charset conversion between
- the charsets as described in Section 3.2.1.2.
- 3758 4.4.16 natural-language-configured (naturalLanguage)
- This REQUIRED Printer attribute identifies the natural language that the Printer object has been
- configured to represent 'text' and 'name' Printer attributes that are set by the operator, system
- administrator, or manufacturer, i.e., for "printer-name" (name), "printer-location" (text), "printer-info"
- 3762 (text), and "printer-make-and-model" (text). When returning these Printer attributes, the Printer object
- MAY return them in the configured natural language specified by this attribute, instead of the natural
- language requested by the client in the "attributes-natural-language" operation attribute. See Section
- 3.1.4.1 for the specification of the OPTIONAL multiple natural language support. Therefore, the value
- of the Printer object's "natural-language-configured" attribute MUST also be among the values of the
- Printer object's "generated-natural-language-supported" attribute.
- 3768 4.4.17 generated-natural-language-supported (1setOf naturalLanguage)
- This REQUIRED Printer attribute identifies the natural language(s) that the Printer object and contained
- Job objects support in attributes with attribute syntax 'text' and 'name'. The natural language(s)
- supported depends on implementation and/or configuration. Unlike charsets, IPP objects MUST accept
- 3772 requests with any natural language or any Natural Language Override whether the natural language is
- 3773 supported or not.
- 3774 If a Printer object supports a natural language, it means that for any of the attributes for which the Printer
- or Job object generates messages, i.e., for the "job-state-message" and "printer-state-message" attributes

- and Operation Messages (see Section 3.1.5) in operation responses, the Printer and Job objects MUST be
- able to generate messages in any of the Printer's supported natural languages. See section 3.1.4 for the
- specification of 'text' and 'name' attributes in operation requests and responses.
- Note: A Printer object that supports multiple natural languages, often has separate catalogs of messages,
- one for each natural language supported.
- 4.4.18 document-format-default (mimeMediaType)
- This REQUIRED Printer attribute identifies the document format that the Printer object has been
- configured to assume if the client does not supply a "document-format" operation attribute in any of the
- operation requests that supply document data. The standard values for this attribute are Internet Media
- types (sometimes called MIME types). For further details see the description of the 'mimeMediaType'
- attribute syntax in Section 4.1.9.
- 3787 4.4.19 document-format-supported (1setOf mimeMediaType)
- 3788 This REQUIRED Printer attribute identifies the set of document formats that the Printer object and
- contained Job objects can support. For further details see the description of the 'mimeMediaType'
- attribute syntax in Section 4.1.9.
- 4.4.20 printer-is-accepting-jobs (boolean)
- This REQUIRED Printer attribute indicates whether the printer is currently able to accept jobs, i.e., is
- accepting Print-Job, Print-URI, and Create-Job requests. If the value is 'true', the printer is accepting
- jobs. If the value is 'false', the Printer object is currently rejecting any jobs submitted to it. In this case,
- the Printer object returns the 'server-error-not-accepting-jobs' status code.
- Note: This value is independent of the "printer-state" and "printer-state-reasons" attributes because its
- value does not affect the current job; rather it affects future jobs. This attribute may cause the Printer to
- reject jobs when the "printer-state" is 'idle' or it may cause the Printer object to accepts jobs when the
- "printer-state" is 'stopped'.
- 3800 4.4.21 queued-job-count (integer(0:MAX))
- This RECOMMENDED Printer attribute contains a count of the number of jobs that are either 'pending',
- 3802 'processing', 'pending-held', or 'processing-stopped' and is set by the Printer object.
- 3803 4.4.22 printer-message-from-operator (text(127))
- This Printer attribute provides a message from an operator, system administrator or "intelligent" process
- to indicate to the end user information or status of the printer, such as why it is unavailable or when it is
- expected to be available.

- 3807 4.4.23 color-supported (boolean)
- This Printer attribute identifies whether the device is capable of any type of color printing at all,
- including highlight color. All document instructions having to do with color are embedded within the
- document PDL (none are external IPP attributes in IPP/1.1).
- Note: end-users are able to determine the nature and details of the color support by querying the
- "printer-more-info-manufacturer" Printer attribute.
- 3813 4.4.24 reference-uri-schemes-supported (1setOf uriScheme)
- This Printer attribute specifies which URI schemes are supported for use in the "document-uri" operation
- attribute of the Print-URI or Send-URI operation. If a Printer object supports these optional operations,
- it MUST support the "reference-uri-schemes-supported" Printer attribute with at least the following
- 3817 schemed URI value:

3828

3829 3830

- 3818 'ftp': The Printer object will use an FTP 'get' operation as defined in RFC 2228 [RFC2228] using
- FTP URLs as defined by [RFC2396] and [RFC2316].
- The Printer object MAY OPTIONALLY support other URI schemes (see section 4.1.6).
- 3822 4.4.25 pdl-override-supported (type2 keyword)
- This REQUIRED Printer attribute expresses the ability for a particular Printer implementation to either
- attempt to override document data instructions with IPP attributes or not.
- This attribute takes on the following values:
- 'attempted': This value indicates that the Printer object attempts to make the IPP attribute values take precedence over embedded instructions in the document data, however there is no guarantee.
  - 'not-attempted': This value indicates that the Printer object makes no attempt to make the IPP attribute values take precedence over embedded instructions in the document data.

Section 16 contains a full description of how this attribute interacts with and affects other IPP attributes, especially the "ipp-attribute-fidelity" attribute.

- 3833 4.4.26 printer-up-time (integer(1:MAX))
- This REQUIRED Printer attribute indicates the amount of time (in seconds) that this instance of this
- Printer implementation has been up and running. This value is used to populate the Job attributes "time-
- at-creation", "time-at-processing", and "time-at-completed". These time values are all measured in
- seconds and all have meaning only relative to this attribute, "printer-up-time". The value is a
- monotonically increasing value starting from 1 when the Printer object is started-up (initialized, booted,
- 3839 etc.).
- If the Printer object goes down at some value 'n', and comes back up, the implementation MAY:

- 1. Know how long it has been down, and resume at some value greater than 'n', or
- 3842 2. Restart from 1.

- In the first case, the Printer SHOULD not tweak any existing related Job attributes ("time-at-creation", "time-at-processing", and "time-at-completed"). In the second case, the Printer object SHOULD reset
- those attributes to 0. If a client queries a time-related Job attribute and finds the value to be 0, the client
- 3847 MUST assume that the Job was submitted in some life other than the Printer's current life.
- 3848 4.4.27 printer-current-time (dateTime)
- This Printer attribute indicates the current absolute wall-clock time. If an implementation supports this
- attribute, then a client could calculate the absolute wall-clock time each Job's "time-at-creation", "time-
- at-processing", and "time-at-completed" attributes by using both "printer-up-time" and this attribute,
- "printer-current-time". If an implementation does not support this attribute, a client can only calculate
- the relative time of certain events based on the REQUIRED "printer-up-time" attribute.
- 3854 4.4.28 multiple-operation-time-out (integer(1:MAX))
- This Printer attributes identifies the minimum time (in seconds) that the Printer object waits for
- additional Send-Document or Send-URI operations to follow a still-open multi-document Job object
- before taking any recovery actions, such as the ones indicated in section 3.3.1. If the Printer object
- supports the Create-Job operation (see section 3.2.4), it MUST support this attribute.
- 3859 It is RECOMMENDED that vendors supply a value for this attribute that is between 60 and 240
- seconds. An implementation MAY allow a system administrator to set this attribute (by means outside
- this IPP/1.1 document). If so, the system administrator MAY be able to set values outside this range.
- 3862 4.4.29 compression-supported (1setOf type3 keyword)
- This Printer attribute identifies the set of supported compression algorithms for document data.
- Compression only applies to the document data; compression does not apply to the encoding of the IPP
- operation itself. The supported values are used to validate the client supplied "compression" operation
- attributes in Print-Job, Send-Document, and Send-URI requests.
- 3867 Standard values are:
- 3868 'none': no compression is used.
- 'deflate': ZIP public domain inflate/deflate) compression technology
- 'gzip' GNU zip compression technology described in RFC 1952 [RFC1952].
- 3871 'compress': UNIX compression technology

- 3873 4.4.30 job-k-octets-supported (rangeOfInteger(0:MAX))
- This Printer attribute specifies the upper and lower bounds of total sizes of jobs in K octets, i.e., in units
- of 1024 octets. The supported values are used to validate the client supplied "job-k-octets" operation

- attributes in create requests. The corresponding job description attribute "job-k-octets" is defined in section 4.3.17.
- 3878 4.4.31 job-impressions-supported (rangeOfInteger(0:MAX))
- This Printer attribute specifies the upper and lower bounds for the number of impressions per job. The
- supported values are used to validate the client supplied "job-impressions" operation attributes in create
- requests. The corresponding job description attribute "job-impressions" is defined in section 4.3.18.
- 3882 4.4.32 job-media-sheets-supported (rangeOfInteger(0:MAX))
- This Printer attribute specifies the upper and lower bounds for the number of media sheets per job. The
- supported values are used to validate the client supplied "job-media-sheets" operation attributes in create
- requests. The corresponding Job attribute "job-media-sheets" is defined in section 4.3.19.
- 3886 4.4.33 pages-per-minute (integer(0:MAX))
- This Printer attributes specifies the nominal number of pages per minute to the nearest whole number
- which may be generated by this printer (e.g., simplex, black-and-white). This attribute is informative,
- not a service guarantee. Generally, it is the value used in the marketing literature to describe the device.
- A value of 0 indicates a device that takes more than two minutes to process a page.
- 3891 4.4.34 pages-per-minute-color (integer(0:MAX))
- This Printer attributes specifies the nominal number of pages per minute to the nearest whole number
- which may be generated by this printer when printing color (e.g., simplex, color). For purposes of this
- attribute, "color" means the same as for the "color-supported" attribute, namely, the device is capable of
- any type of color printing at all, including highlight color. This attribute is informative, not a service
- guarantee. Generally, it is the value used in the marketing literature to describe the color capabilities of
- this device.
- A value of 0 indicates a device that takes more than two minutes to process a page.
- Note: If a color device has several color modes, it MAY use the pages-per-minute value for this
- attribute that corresponds to the mode that produces the highest number.
- Black and white only printers MUST NOT support this attribute. If this attribute is present, then the
- "color-supported" Printer description attribute MUST be present and have a 'true' value.
- Note: The values of these two attributes returned by the Get-Printer-Attributes operation MAY be
- affected by the "document-format" attribute supplied by the client in the Get-Printer-Attributes request.
- In other words, the implementation MAY have different speeds depending on the document format
- being processed. See section 3.2.5.1 Get-Printer-Attributes.

	_	<b>C</b> C
3907	<b>`</b>	Conformance
J301	J.	Comormance

3937

- This section describes conformance issues and requirements. This document introduces model entities
- such as objects, operations, attributes, attribute syntaxes, and attribute values. These conformance
- sections describe the conformance requirements which apply to these model entities.

### 5.1 Client Conformance Requirements

- A conforming client MUST support all REQUIRED operations as defined in this document. For each
- attribute included in an operation request, a conforming client MUST supply a value whose type and
- value syntax conforms to the requirements of the Model document as specified in Sections 3 and 3.3.5.
- A conforming client MAY supply any registered extensions and/or private extensions in an operation
- request, as long as they meet the requirements in Section 6.
- Otherwise, there are no conformance requirements placed on the user interfaces provided by IPP clients
- or their applications. For example, one application might not allow an end user to submit multiple
- documents per job, while another does. One application might first query a Printer object in order to
- supply a graphical user interface (GUI) dialogue box with supported and default values whereas a
- different implementation might not.
- When sending a request, an IPP client NEED NOT supply any attributes that are indicated as
- 3923 OPTIONALLY supplied by the client.
- A client MUST be able to accept any of the attribute syntaxes defined in Section 4.1, including their full
- range, that may be returned to it in a response from a Printer object. In particular for each attribute that
- the client supports whose attribute syntax is 'text', the client MUST accept and process both the
- 3927 'textWithoutLanguage' and 'textWithLanguage' forms. Similarly, for each attribute that the client
- supports whose attribute syntax is 'name', the client MUST accept and process both the
- 'nameWithoutLanguage' and 'nameWithLanguage' forms. For presentation purposes, truncation of long
- attribute values is not recommended. A recommended approach would be for the client implementation
- to allow the user to scroll through long attribute values.
- A query response may contain attribute groups, attributes, and values that the client does not expect.
- Therefore, a client implementation MUST gracefully handle such responses and not refuse to inter-
- operate with a conforming Printer that is returning extended registered or private attributes and/or
- attribute values that conform to Section 6. Clients may choose to ignore any parameters, attributes, or
- values that they do not understand.

### 5.2 IPP Object Conformance Requirements

3938 This section specifies the conformance requirements for conforming implementations with respect to

objects, operations, and attributes.

```
3940 5.2.1 Objects
```

Conforming implementations MUST implement all of the model objects as defined in this specification in the indicated sections:

```
Section 2.1 - Printer Object
Section 2.2 - Job Object
```

3945

3946

### 5.2.2 Operations

Conforming IPP object implementations MUST implement all of the REQUIRED model operations, including REQUIRED responses, as defined in this specification in the indicated sections:

3949	For a Printer object:	
3950	Print-Job (section 3.2.1)	REQUIRED
3951	Print-URI (section 3.2.2)	OPTIONAL
3952	Validate-Job (section 3.2.3)	REQUIRED
3953	Create-Job (section 3.2.4)	OPTIONAL
3954	Get-Printer-Attributes (section 3.2.5)	REQUIRED
3955	Get-Jobs (section 3.2.6)	REQUIRED
3956	Pause-Printer (section 3.2.7)	OPTIONAL
3957	Resume-Printer (section 3.2.8)	OPTIONAL
3958	Purge-Jobs (section 3.2.9)	OPTIONAL
3959		
3960	For a Job object:	
3961	Send-Document (section 3.3.1)	OPTIONAL
3962	Send-URI (section 3.3.2)	OPTIONAL
3963	Cancel-Job (section 3.3.3)	REQUIRED
3964	Get-Job-Attributes (section 3.3.4)	REQUIRED
3965	Hold-Job (section 3.3.5)	OPTIONAL
3966	Release-Job (section 3.3.6)	OPTIONAL
3967	Restart-Job (section 3.3.7)	OPTIONAL

3968

3969

3970

3971

3972

3973

Conforming IPP objects MUST support all REQUIRED operation attributes and all values of such attributes if so indicated in the description. Conforming IPP objects MUST ignore all unsupported or unknown operation attributes or operation attribute groups received in a request, but MUST reject a request that contains a supported operation attribute that contains an unsupported value.

The following section on object attributes specifies the support required for object attributes.

#### 3974 5.2.3 IPP Object Attributes

Conforming IPP objects MUST support all of the REQUIRED object attributes, as defined in this specification in the indicated sections.

- If an object supports an attribute, it MUST support only those values specified in this document or
- through the extension mechanism described in section 5.2.4. It MAY support any non-empty subset of
- these values. That is, it MUST support at least one of the specified values and at most all of them.
- 3980 5.2.4 Versions
- 3981 Clients MUST support version 1.1 and MAY also support version 1.0. IPP objects MUST support both
- version 1.0 and 1.1. See section 3.1.7.
- 3983 5.2.5 Extensions
- A conforming IPP object MAY support registered extensions and private extensions, as long as they
- meet the requirements specified in Section 6.
- For each attribute included in an operation response, a conforming IPP object MUST return a value
- whose type and value syntax conforms to the requirement of the Model document as specified in
- 3988 Sections 3 and 3.3.5.
- 3989 5.2.6 Attribute Syntaxes
- An IPP object MUST be able to accept any of the attribute syntaxes defined in Section 4.1, including
- their full range, in any operation in which a client may supply attributes or the system administrator may
- configure attributes (by means outside the scope of this IPP/1.1 document). In particular for each
- attribute that the IPP object supports whose attribute syntax is 'text', the IPP object MUST accept and
- process both the 'textWithoutLanguage' and 'textWithLanguage' forms. Similarly, for each attribute that
- the IPP object supports whose attribute syntax is 'name', the IPP object MUST accept and process both
- the 'nameWithoutLanguage' and 'nameWithLanguage' forms. Furthermore, an IPP object MUST return
- attributes to the client in operation responses that conform to the syntax specified in Section 4.1,
- including their full range if supplied previously by a client.
- 5.3 Charset and Natural Language Requirements
- All clients and IPP objects MUST support the 'utf-8' charset as defined in section 4.1.7.
- 4001 IPP objects MUST be able to accept any client request which correctly uses the "attributes-natural-
- language" operation attribute or the Natural Language Override mechanism on any individual attribute
- whether or not the natural language is supported by the IPP object. If an IPP object supports a natural
- language, then it MUST be able to translate (perhaps by table lookup) all generated 'text' or 'name'
- attribute values into one of the supported languages (see section 3.1.4). That is, the IPP object that
- supports a natural language NEED NOT be a general purpose translator of any arbitrary 'text' or 'name'
- value supplied by the client into that natural language. However, the object MUST be able to translate
- 4008 (automatically generate) any of its own attribute values and messages into that natural language.

- 4009 5.4 Security Conformance Requirements
- Conforming IPP Printer objects SHOULD support Transport Layer Security (TLS) protocol Version 1
- (TLS) [RFC2246] access, MAY support access without TLS, or MAY support both means of access.
- 4012 Conforming IPP clients SHOULD support TLS access and non-TLS access. Note: This client
- recommendation to support both means that conforming IPP clients will be able to inter-operate with any
- 4014 IPP Printer object.
- For a detailed discussion of security considerations and the IPP application security profile required for
- 4016 TLS support, see section 8.
- 6. IANA Considerations (registered and private extensions)
- This section describes how IPP can be extended to allow the following registered and private extensions to IPP:
- 1. keyword attribute values
- 2. enum attribute values
- 4022 3. attributes
- 4. attribute syntaxes
- 5. operations
- 4025 6. attribute groups
- 4026 7. status codes

- Extensions registered for use with IPP/1.1 are OPTIONAL for client and IPP object conformance to the
- 4029 IPP/1.1 Model specification.
- These extension procedures are aligned with the guidelines as set forth by the IESG [IANA-CON].
- Section 12 describes how to propose new registrations for consideration. IANA will reject registration
- proposals that leave out required information or do not follow the appropriate format described in
- Section 12. IPP/1.1 may also be extended by an appropriate RFC that specifies any of the above
- 4034 extensions.
- 4035 6.1 Typed 'keyword' and 'enum' Extensions
- 4036 IPP allows for 'keyword' and 'enum' extensions (see sections 4.1.2.3 and 4.1.4). This document uses
- prefixes to the 'keyword' and 'enum' basic attribute syntax type in order to communicate extra
- information to the reader through its name. This extra information is not represented in the protocol
- because it is unimportant to a client or Printer object. The list below describes the prefixes and their
- 4040 meaning.

"type1": The IPP specification must be revised to add a new keyword or a new enum. No private 4041 keywords or enums are allowed. 4042 4043 "type2": Implementers can, at any time, add new keyword or enum values by proposing the 4044 complete specification to IANA: 4045 4046 iana@iana.org 4047 4048 IANA will forward the registration proposal to the IPP Designated Expert who will review the 4049 proposal with a mailing list that the Designated Expert keeps for this purpose. Initially, that list 4050 will be the mailing list used by the IPP WG: 4051 4052 ipp@pwg.org 4053 4054 even after the IPP WG is disbanded as permitted by [IANA-CON]. The IPP Designated Expert 4055 is appointed by the IESG Area Director responsible for IPP, according to [IANA-CON]. 4056 4057 When a type2 keyword or enum is approved, the IPP Designated Expert becomes the point of 4058 contact for any future maintenance that might be required for that registration. 4059 4060 "type3": Implementers can, at any time, add new keyword and enum values by submitting the 4061 complete specification to IANA as for type2 who will forward the proposal to the IPP Designated 4062 Expert. While no additional technical review is required, the IPP Designated Expert may, at 4063 his/her discretion, forward the proposal to the same mailing list as for type2 registrations for 4064 advice and comment. 4065 4066 When a type3 keyword or enum is approved by the IPP Designated Expert, the original proposer 4067 becomes the point of contact for any future maintenance that might be required for that 4068 registration. 4069 4070 For type2 and type3 keywords, the proposer includes the name of the keyword in the registration 4071 proposal and the name is part of the technical review. 4072 After type2 and type3 enums specifications are approved, the IPP Designated Expert in consultation with 4073 IANA assigns the next available enum number for each enum value. 4074 IANA will publish approved type2 and type3 keyword and enum attributes value registration 4075 specifications in: 4076 ftp.isi.edu/iana/assignments/ipp/attribute-values/xxx/yyy.txt 4077 where xxx is the attribute name that specifies the initial values and yyy.txt is a descriptive file name that 4078

4079

4080

4081

contains one or more enums or keywords approved at the same time. For example, if several additional

enums for stapling are approved for use with the "finishings" attribute (and "finishings-default" and

"finishings-supported" attributes), IANA will publish the additional values in the file:

- 4082 ftp.isi.edu/iana/assignments/ipp/attribute-values/finishings/stapling.txt.
- Note: Some attributes are defined to be: 'type3 keywords' | 'name' which allows for attribute values to be
- extended by a site administrator with administrator defined names. Such names are not registered with
- 4085 IANA.
- By definition, each of the three types above assert some sort of registry or review process in order for
- extensions to be considered valid. Each higher numbered level (1, 2, 3) tends to be decreasingly less
- stringent than the previous level. Therefore, any typeN value MAY be registered using a process for
- some typeM where M is less than N, however such registration is NOT REQUIRED. For example, a
- 4090 type3 value MAY be registered in a type 1 manner (by being included in a future version of an IPP
- specification), however, it is NOT REQUIRED.
- This specification defines keyword and enum values for all of the above types, including type3
- 4093 keywords.
- For private (unregistered) keyword extensions, implementers SHOULD use keywords with a suitable
- distinguishing prefix, such as "xxx-" where xxx is the (lowercase) fully qualified company name
- registered with IANA for use in domain names [RFC1035]. For example, if the company XYZ Corp.
- had obtained the domain name "XYZ.com", then a private keyword 'abc' would be: 'xyz.com-abc'.
- Note: RFC 1035 [RFC1035] indicates that while upper and lower case letters are allowed in domain
- names, no significance is attached to the case. That is, two names with the same spelling but different
- case are to be treated as if identical. Also, the labels in a domain name must follow the rules for
- ARPANET host names: They must start with a letter, end with a letter or digit, and have as interior
- characters only letters, digits, and hyphen. Labels must be 63 characters or less. Labels are separated by
- the "." character.
- For private (unregistered) enum extension, implementers MUST use values in the reserved integer range
- which is 2\*\*30 to 2\*\*31-1.
- 4106 6.2 Attribute Extensibility
- 4107 Attribute names are type 2 keywords. Therefore, new attributes may be registered and have the same
- status as attributes in this document by following the type2 extension rules. For private (unregistered)
- attribute extensions, implementers SHOULD use keywords with a suitable distinguishing prefix as
- described in Section 6.1.
- IANA will publish approved attribute registration specifications as separate files:
- 4112 ftp.isi.edu/iana/assignments/ipp/attributes/xxx-yyy.txt
- where "xxx-yyy" is the new attribute name.
- If a new Printer object attribute is defined and its values can be affected by a specific document format,
- its specification needs to contain the following sentence:

- "The value of this attribute returned in a Get-Printer-Attributes response MAY depend on the 4116 "document-format" attribute supplied (see Section 3.2.5.1)." 4117 If the specification does not, then its value in the Get-Printer-Attributes response MUST NOT depend on 4118 the "document-format" supplied in the request. When a new Job Template attribute is registered, the 4119 value of the Printer attributes MAY vary with "document-format" supplied in the request without the 4120 specification having to indicate so. 4121 6.3 Attribute Syntax Extensibility 4122 Attribute syntaxes are like type2 enums. Therefore, new attribute syntaxes may be registered and have 4123 the same status as attribute syntaxes in this document by following the type2 extension rules described in 4124 Section 6.1. The value codes that identify each of the attribute syntaxes are assigned in the "Encoding 4125 and Transport" specification [IPP-PRO], including a designated range for private, experimental use. 4126 For attribute syntaxes, the IPP Designated Expert in consultation with IANA assigns the next attribute 4127 syntax code in the appropriate range as specified in [IPP-PRO]. IANA will publish approved attribute 4128 syntax registration specifications as separate files: 4129 ftp.isi.edu/iana/assignments/ipp/attribute-syntaxes/xxx-yyy.txt 4130 where 'xxx-yyy' is the new attribute syntax name. 4131 6.4 Operation Extensibility 4132 Operations may also be registered following the type2 procedures described in Section 6.1, though major 4133 new operations will usually be done by a new standards track RFC that augments this document. For 4134 private (unregistered) operation extensions, implementers MUST use the range for the "operation-id" in 4135 requests specified in Section 4.4.13 "operations-supported" Printer attribute. 4136 For operations, the IPP Designated Expert in consultation with IANA assigns the next operation-id code 4137 as specified in Section 4.4.13. IANA will publish approved operation registration specifications as 4138 separate files: 4139 ftp.isi.edu/iana/assignments/ipp/operations/Xxx-Yyy.txt 4140
- 4142 6.5 Attribute Groups

Attribute groups passed in requests and responses may be registered following the type2 procedures described in Section 6.1. The tags that identify each of the attribute groups are assigned in [IPP-PRO].

where "Xxx-Yyy" is the new operation name.

- For attribute groups, the IPP Designated Expert in consultation with IANA assigns the next attribute
- group tag code in the appropriate range as specified in [IPP-PRO]. IANA will publish approved
- attribute group registration specifications as separate files:
- 4148 ftp.isi.edu/iana/assignments/ipp/attribute-group-tags/xxx-yyy-tag.txt
- where 'xxx-yyy-tag' is the new attribute group tag name.
- 4150 6.6 Status Code Extensibility
- Operation status codes may also be registered following the type2 procedures described in Section 6.1.
- The values for status codes are allocated in ranges as specified in Section 14 for each status code class:
- "informational" Request received, continuing process
- "successful" The action was successfully received, understood, and accepted
- "redirection" Further action must be taken in order to complete the request
- "client-error" The request contains bad syntax or cannot be fulfilled
- "server-error" The IPP object failed to fulfill an apparently valid request
- For private (unregistered) operation status code extensions, implementers MUST use the top of each
- range as specified in Section 14.

- For operation status codes, the IPP Designated Expert in consultation with IANA assigns the next status
- code in the appropriate class range as specified in Section 14. IANA will publish approved status code
- registration specifications as separate files:
- 4164 ftp.isi.edu/iana/assignments/ipp/status-codes/xxx-yyy.txt
- where "xxx-yyy" is the new operation status code keyword.
- 4166 6.7 Registration of MIME types/sub-types for document-formats
- The "document-format" attribute's syntax is 'mimeMediaType'. This means that valid values are Internet
- Media Types (see Section 4.1.9). RFC 2045 [RFC2045] defines the syntax for valid Internet media
- types. IANA is the registry for all Internet media types.
- 6.8 Registration of charsets for use in 'charset' attribute values
- The "attributes-charset" attribute's syntax is 'charset'. This means that valid values are charsets names.
- When a charset in the IANA registry has more than one name (alias), the name labeled as "(preferred
- MIME name)", if present, MUST be used (see Section 4.1.7). IANA is the registry for charsets
- following the procedures of [RFC2278].

#### 7. Internationalization Considerations

- Some of the attributes have values that are text strings and names which are intended for human
- understanding rather than machine understanding (see the 'text' and 'name' attribute syntaxes in Sections
- 4.1.1 and 4.1.2).

4175

4184

- In each operation request, the client
- identifies the charset and natural language of the request which affects each supplied 'text' and 'name' attribute value, and
- requests the charset and natural language for attributes returned by the IPP object in operation responses (as described in Section 3.1.4.1).

In addition, the client MAY separately and individually identify the Natural Language Override of a supplied 'text' or 'name' attribute using the 'textWithLanguage' and 'nameWithLanguage' technique

- described section 4.1.1.2 and 4.1.2.2 respectively.
- All IPP objects MUST support the UTF-8 [RFC2279] charset in all 'text' and 'name' attributes supported.
- 4189 If an IPP object supports more than the UTF-8 charset, the object MUST convert between them in order
- to return the requested charset to the client according to Section 3.1.4.2. If an IPP object supports more
- than one natural language, the object SHOULD return 'text' and 'name' values in the natural language
- requested where those values are generated by the Printer (see Section 3.1.4.1).
- For Printers that support multiple charsets and/or multiple natural languages in 'text' and 'name'
- attributes, different jobs may have been submitted in differing charsets and/or natural languages. All
- responses MUST be returned in the charset requested by the client. However, the Get-Jobs operation
- uses the 'textWithLanguage' and 'nameWithLanguage' mechanism to identify the differing natural
- languages with each job attribute returned.
- The Printer object also has configured charset and natural language attributes. The client can query the
- Printer object to determine the list of charsets and natural languages supported by the Printer object and
- what the Printer object's configured values are. See the "charset-configured", "charset-supported",
- "natural-language-configured", and "generated-natural-language-supported" Printer description attributes
- for more details.
- The "charset-supported" attributed identifies the supported charsets. If a charset is supported, the IPP
- object MUST be capable of converting to and from that charset into any other supported charset. In
- many cases, an IPP object will support only one charset and it MUST be the UTF-8 charset.
- The "charset-configured" attribute identifies the one supported charset which is the native charset given
- the current configuration of the IPP object (administrator defined).
- The "generated-natural-language-supported" attribute identifies the set of supported natural languages
- for generated messages; it is not related to the set of natural languages that must be accepted for client
- supplied 'text' and 'name' attributes. For client supplied 'text' and 'name' attributes, an IPP object MUST
- accept ALL supplied natural languages. Just because a Printer object is currently configured to support

- 'en-us' natural language does not mean that the Printer object should reject a job if the client supplies a job name that is in 'fr-ca'.
- The "natural-language-configured" attribute identifies the one supported natural language for generated
- messages which is the native natural language given the current configuration of the IPP object
- 4216 (administrator defined).

4220

4221

4222

4223

4224

4225

4226

4227

4228

4229

4230

4231

4232

4233

4234

4235

4236

4237

4238

4239

4240 4241

- Attributes of type 'text' and 'name' are populated from different sources. These attributes can be categorized into following groups (depending on the source of the attribute):
  - 1. Some attributes are supplied by the client (e.g., the client supplied "job-name", "document-name", and "requesting-user-name" operation attributes along with the corresponding Job object's "job-name" and "job-originating-user-name" attributes). The IPP object MUST accept these attributes in any natural language no matter what the set of supported languages for generated messages
  - 2. Some attributes are supplied by the system administrator (e.g., the Printer object's "printer-name" and "printer-location" attributes). These too can be in any natural language. If the natural language for these attributes is different than what a client requests, then they must be reported using the Natural Language Override mechanism.
  - 3. Some attributes are supplied by the device manufacturer (e.g., the Printer object's "printer-make-and-model" attribute). These too can be in any natural language. If the natural language for these attributes is different than what a client requests, then they must be reported using the Natural Language Override mechanism.
  - 4. Some attributes are supplied by the operator (e.g., the Job object's "job-message-from-operator" attribute). These too can be in any natural language. If the natural language for these attributes is different than what a client requests, then they must be reported using the Natural Language Override mechanism.
  - 5. Some attributes are generated by the IPP object (e.g., the Job object's "job-state-message" attribute, the Printer object's "printer-state-message" attribute, and the "status-message" operation attribute). These attributes can only be in one of the "generated-natural-language-supported" natural languages. If a client requests some natural language for these attributes other than one of the supported values, the IPP object SHOULD respond using the value of the "natural-language-configured" attribute (using the Natural Language Override mechanism if needed).

The 'text' and 'name' attributes specified in this version of this document (additional ones will be registered according to the procedures in Section 6) are:

4244	Attributes	Source
4245		
4246	Operation Attributes	
4247	job-name (name)	client
4248	document-name (name)	client
4249	requesting-user-name (name)	client
4250	status-message	Job or Printer object
4251		
4252	Job Template Attributes:	
4253	job-hold-until (keyword   name)	client matches administrator-configured

```
job-hold-until-default (keyword | name)
                                                           client matches administrator-configured
4254
              job-hold-until-supported (keyword | name)
                                                           client matches administrator-configured
4255
              job-sheets (keyword | name)
                                                           client matches administrator-configured
4256
              job-sheets-default (keyword | name)
                                                           client matches administrator-configured
4257
              job-sheets-supported (keyword | name)
                                                           client matches administrator-configured
4258
              media (keyword | name)
                                                           client matches administrator-configured
4259
              media-default (keyword | name)
                                                           client matches administrator-configured
4260
              media-supported (keyword | name)
                                                           client matches administrator-configured
4261
              media-ready (keyword | name)
                                                           client matches administrator-configured
4262
4263
           Job Description Attributes:
4264
              job-name (name)
4265
                                                           client or Printer object
              job-originating-user-name (name)
                                                           Printer object
4266
              job-state-message (text)
                                                           Job or Printer object
4267
              output-device-assigned (name(127))
                                                           administrator
4268
              job-message-from-operator (text(127))
                                                           operator
4269
4270
           Printer Description Attributes:
4271
              printer-name (name(127))
                                                           administrator
4272
```

printer-name (name(127)) administrator printer-location (text(127)) administrator printer-info (text(127)) administrator

printer-make-and-model (text(127)) administrator or manufacturer

printer-state-message (text) Printer object printer-message-from-operator (text(127)) operator

## 8. Security Considerations

4279 IPP objects SHOULD be deployed over protocol stacks that support the Transport Layer Security (TLS)

protocol [RFC2246]. Other IPP objects MAY be deployed over protocol stacks that do not support TLS.

Some IPP objects MAY be deployed over both types of protocol stacks. Those IPP objects that support

4282 TLS, are capable of supporting mutual authentication as well as privacy of messages via multiple

encryption schemes. An important point about security related information for TLS access to an IPP

object, is that the security-related parameters (authentication, encryption keys, etc.) are "out-of-band" to

4284 object, is that the security-related parameters (authentication, encryption keys, etc.) are out-or-or-

the actual IPP protocol.

4273

4274

4275

4276

4277

4278

4287

An IPP object that does not support TLS MAY elect to support a transport layer that provides other

security mechanisms. For example, in a mapping of IPP over HTTP/1.1 [IPP-PRO], if the IPP object

does not support TLS, HTTP still allows for client authentication using Digest Access Authentication

4289 (DAA) [RFC2069].

It is difficult to anticipate the security risks that might exist in any given IPP environment. For example,

if IPP is used within a given corporation over a private network, the risks of exposing document data

may be low enough that the corporation will choose not to use encryption on that data. However, if the

connection between the client and the IPP object is over a public network, the client may wish to protect

the content of the information during transmission through the network with encryption.

- Furthermore, the value of the information being printed may vary from one IPP environment to the next.
- Printing payroll checks, for example, would have a different value than printing public information from
- a file. There is also the possibly of denial-of-service attacks, but denial-of-service attacks against
- printing resources are not well understood and there is no published precedents regarding this scenario.
- Once the authenticated identity of the requester has been supplied to the IPP object, the object uses that
- identity to enforce any authorization policy that might be in place. For example, one site's policy might
- be that only the job owner is allowed to cancel a job. The details and mechanisms to set up a particular
- access control policy are not part of IPP/1.1, and must be established via some other type of
- administrative or access control framework. However, there are operation status codes that allow an IPP
- server to return information back to a client about any potential access control violations for an IPP
- 4305 object.
- During a create operation, the client's identity is recorded in the Job object in an implementation-defined
- attribute. This information can be used to verify a client's identity for subsequent operations on that Job
- object in order to enforce any access control policy that might be in effect. See section 8.3 below for
- 4309 more details.
- Since the security levels or the specific threats that any given IPP system administrator may be
- concerned with cannot be anticipated, IPP MUST be capable of operating with different security
- mechanisms and security policies as required by the individual installation. Security policies might vary
- from very strong, to very weak, to none at all, and corresponding security mechanisms will be required.
- TLS supports the type of negotiated levels of security required by most, if not all, potential IPP
- environments. IPP environments that require no security can elect to deploy IPP objects that do not
- utilize the optional TLS security mechanisms.
- 4317 8.1 Security Scenarios
- The following sections describe specific security attacks for IPP environments. Where examples are
- provided they should be considered illustrative of the environment and not an exhaustive set. Not all of
- these environments will necessarily be addressed in initial implementations of IPP.
- 8.1.1 Client and Server in the Same Security Domain
- This environment is typical of internal networks where traditional office workers print the output of
- personal productivity applications on shared work-group printers, or where batch applications print their
- output on large production printers. Although the identity of the user may be trusted in this environment,
- a user might want to protect the content of a document against such attacks as eavesdropping, replaying
- 4326 or tampering.
- 8.1.2 Client and Server in Different Security Domains
- Examples of this environment include printing a document created by the client on a publicly available
- printer, such as at a commercial print shop; or printing a document remotely on a business associate's
- printer. This latter operation is functionally equivalent to sending the document to the business associate

- as a facsimile. Printing sensitive information on a Printer in a different security domain requires strong
- security measures. In this environment authentication of the printer is required as well as protection
- against unauthorized use of print resources. Since the document crosses security domains, protection
- against eavesdropping and document tampering are also required. It will also be important in this
- environment to protect Printers against "spamming" and malicious document content.

## 8.1.3 Print by Reference

- When the document is not stored on the client, printing can be done by reference. That is, the print
- request can contain a reference, or pointer, to the document instead of the actual document itself.
- Standard methods currently do not exist for remote entities to "assume" the credentials of a client for
- forwarding requests to a 3rd party. It is anticipated that Print-By-Reference will be used to access
- "public" documents and that sophisticated methods for authenticating "proxies" will not be specified for
- version 1 of IPP.

4336

4355

4356

4357

4358

4359

4360

4361 4362

4363

4364

4365

4366

4367

# 4343 8.2 URIs for TLS and non-TLS Access

- 4344 As described earlier, an IPP object SHOULD support TLS access, MAY non-TLS access, or both. The
- "printer-uri-supported" attribute contains the Printer object's URI(s). Its companion attribute, "uri-
- security-supported", identifies the security mechanism used for each URI listed in the "printer-uri-
- supported" attribute. For each Printer operation request, a client MUST supply only one URI in the
- "printer-uri" operation attribute. In other words, even though the Printer supports more than one URI,
- the client only interacts with the Printer object using one if its URIs. This duality is not needed for Job
- objects, since the Printer objects is the factory for Job objects, and the Printer object will generate the
- correct URI for new Job objects depending on the Printer object's security configuration.

## 4352 8.3 The "requesting-user-name" (name(MAX)) Operation Attribute

Each operation MUST specify the user who is performing the operation in both of the following two ways:

- 1) via the REQUIRED "requesting-user-name" operation attribute that a client SHOULD supply in all operations. The client MUST obtain the value for this attribute from an environmental or network login name for the user, rather than allowing the user to supply any value. If the client does not supply a value for "requesting-user-name", the printer MUST assume that the client is supplying some anonymous name, such as "anonymous".
- 2) via an authentication mechanism of the underlying transport which may be configured to give no authentication information.

## There are six cases to consider:

- a) the authentication mechanism gives no information, and the client doesn't specify "requesting-user-name".
- b) the authentication mechanism gives no information, but the client specifies "requesting-user-name".

- c) the authentication mechanism specifies a user which has no human readable representation, and the client doesn't specify "requesting-user-name".
- d) the authentication mechanism specifies a user which has no human readable representation, but the client specifies "requesting-user-name".
- e) the authentication mechanism specifies a user which has a human readable representation. The Printer object ignores the "requesting-user-name".
- f) the authentication mechanism specifies a user who is trusted and whose name means that the value of the "requesting-user-name", which MUST be present, is treated as the authenticated name.

Note: Case "f" is intended for a tightly coupled gateway and server to work together so that the "user" name is able to be that of the gateway client and not that of the gateway. Because most, if not all, system vendors will initially implement IPP via a gateway into their existing print system, this mechanism is necessary unless the authentication mechanism allows a gateway (client) to act on behalf of some other client.

The user-name has two forms:

- one that is human readable: it is held in the REQUIRED "job-originating-user-name" Job Description attribute which is set during the job creation operations. It is used for presentation only, such as returning in queries or printing on start sheets
- one for authorization: it is held in an undefined (by IPP) Job object attribute which is set by the job creation operation. It is used to authorize other operations, such as Send-Document, Send-URI, Cancel-Job, to determine the user when the "my-jobs" attribute is specified with Get-Jobs, and to limit what attributes and values to return with Get-Job-Attributes and Get-Jobs.

The human readable user name:

- is the value of the "requesting-user-name" for cases b, d and f.
- comes from the authentication mechanism for case e
- is some anonymous name, such as "anonymous" for cases a and c.

The user name used for authorization:

- is the value of the "requesting-user-name" for cases b and f.
- comes from the authentication mechanism for cases c, d and e
- is some anonymous name, such as "anonymous" for case a.

The essence of these rules for resolving conflicting sources of user-names is that a printer implementation is free to pick either source as long as it achieves consistent results. That is, if a user uses the same path for a series of requests, the requests MUST appear to come from the same user from the standpoint of both the human-readable user name and the user name for authorization. This rule MUST continue to apply even if a request could be authenticated by two or more mechanisms. It doesn't matter which of several authentication mechanisms a Printer uses as long as it achieves consistent

- results. If a client uses more than one authentication mechanism, it is recommended that an
- administrator make all credentials resolve to the same user and user-name as much as possible.
- 4410 8.4 Restricted Queries
- In many IPP operations, a client supplies a list of attributes to be returned in the response. For security
- reasons, an IPP object may be configured not to return all attributes (or all values) that a client requests.
- The job attributes returned MAY depend on whether the requesting user is the same as the user that
- submitted the job. The IPP object MAY even return none of the requested attributes. In such cases, the
- status returned is the same as if the object had returned all requested attributes. The client cannot tell by
- such a response whether the requested attribute was present or absent on the object.
- 8.5 Operations performed by operators and system administrators
- 4418 For the three printer operations Pause-Printer, Resume-Printer, and Purge-Jobs (see sections 3.2.7, 3.2.8
- and 3.2.9), the requesting user is intended to be an operator or administrator of the Printer object (see
- section 1). The means for authorizing an operator or administrator of the Printer object are not specified
- in this document.
- 8.6 Queries on jobs submitted using non-IPP protocols
- 4423 If the device that an IPP Printer is representing is able to accept jobs using other job submission
- protocols in addition to IPP, it is RECOMMENDED that such an implementation at least allow such
- "foreign" jobs to be queried using Get-Jobs returning "job-id" and "job-uri" as 'unknown'. Such an
- implementation NEED NOT support all of the same IPP job attributes as for IPP jobs. The IPP object
- returns the 'unknown' out-of-band value for any requested attribute of a foreign job that is supported for
- IPP jobs, but not for foreign jobs.
- It is further RECOMMENDED, that the IPP Printer generate "job-id" and "job-uri" values for such
- "foreign jobs", if possible, so that they may be targets of other IPP operations, such as Get-Job-Attributes
- and Cancel-Job. Such an implementation also needs to deal with the problem of authentication of such
- foreign jobs. One approach would be to treat all such foreign jobs as belonging to users other than the
- user of the IPP client. Another approach would be for the foreign job to belong to 'anonymous'. Only if
- the IPP client has been authenticated as an operator or administrator of the IPP Printer object, could the
- foreign jobs be queried by an IPP request. Alternatively, if the security policy is to allow users to query
- other users' jobs, then the foreign jobs would also be visible to an end-user IPP client using Get-Jobs and
- 4437 Get-Job-Attributes.

- 8.7 IPP Security Application Profile for TLS
- The IPP application profile for TLS follows the standard "Mandatory Cipher Suites" requirement as documented in the TLS specification [RFC2246].

- If a conforming IPP object supports TLS, it MUST implement and support the "Mandatory Cipher
- Suites" as specified in the TLS specification [RFC2246] and MAY support additional cipher suites.
- A conforming IPP client SHOULD support TLS including the "Mandatory Cipher Suites" as specified in
- the TLS specification [RFC2246]. A conforming IPP client MAY support additional cipher suites.
- Client implementations MUST NOT assume any other cipher suites are supported by an IPP Printer
- 4446 object.
- 9. See the TLS specification [RFC2246] for a discussion of any government export restrictions on
- implementations conforming to the "Mandatory Cipher Suites". References
- 4449 [ASCII]
- Coded Character Set 7-bit American Standard Code for Information Interchange (ASCII), ANSI X3.4-1986. This standard is the specification of the US-ASCII charset.
- 4452 [BCP-11]
- Bradner S., Hovey R., "The Organizations Involved in the IETF Standards Process", 1996/10/29 (RFC 2028)
- 4455 [HTPP]
- J. Barnett, K. Carter, R. DeBry, "Initial Draft Hypertext Printing Protocol HTPP/1.0",
- October 1996, ftp://ftp.pwg.org/pub/pwg/ipp/historic/htpp/overview.ps.gz
- 4458 [IANA-CON]
- Narte, T. and Alvestrand, H.T.: Guidelines for Writing an IANA Considerations Section in
- 4460 RFCs, Work in Progress, draft-iesg-iana-considerations-04.txt, May 21, 1998.
- 4461 [IANA-CS]
- IANA Registry of Coded Character Sets: ftp://ftp.isi.edu/in-notes/iana/assignments/character-sets
- 4463 [IANA-MT]
- IANA Registry of Media Types: ftp://ftp.isi.edu/in-notes/iana/assignments/media-types/
- 4465 [IPP-IIG]
- Hastings, T., Manros, C., "Internet Printing Protocol/1.1: draft-ietf-ipp-implementers-guide-v11-??.txt, ?? 1999, work in progress.
- 4468 [IPP-IIG1.0]
- Hastings, T., Manros, C., "Internet Printing Protocol/1.0: Implementer's Guide", draft-ietf-ipp-implementers-guide-01.txt, February 1999, work in progress.
- 4471 [IPP LPD]
- Herriot, R., Hastings, T., Jacobs, N., Martin, J., "Mapping between LPD and IPP Protocols",
- draft-ietf-ipp-lpd-ipp-map-05.txt, November 1998.

```
[IPP-MOD1.0]
4474
              R. deBry, T. Hastings, R. Herriot, S. Isaacson, P. Powell, "Internet Printing Protocol/1.0: Model
4475
              and Semantics", draft-ietf-ipp-model-11.txt, November, 1998.
4476
       [IPP-PRO]
4477
              Herriot, R., Butler, S., Moore, P., Tuner, R., "Internet Printing Protocol/1.1: Encoding and
4478
              Transport", draft-ietf-ipp-protocol-v11-00.txt, February, 1999.
4479
       [IPP-PRO1.0]
4480
              Herriot, R., Butler, S., Moore, P., Tuner, R., "Internet Printing Protocol/1.0: Encoding and
4481
              Transport", draft-ietf-ipp-protocol-07.txt, November, 1998.
4482
       [IPP-RAT]
4483
              Zilles, S., "Rationale for the Structure and Model and Protocol for the Internet Printing Protocol",
4484
              draft-ietf-ipp-rat-04.txt, November, 1998.
4485
       [IPP-REQ]
4486
              Wright, D., "Design Goals for an Internet Printing Protocol", draft-ietf-ipp-req-03.txt, November,
4487
4488
       [ISO10646-1]
4489
              ISO/IEC 10646-1:1993, "Information technology -- Universal Multiple-Octet Coded Character
4490
              Set (UCS) - Part 1: Architecture and Basic Multilingual Plane, JTC1/SC2."
4491
       [ISO8859-1]
4492
              ISO/IEC 8859-1:1987, "Information technology -- 8-bit One-Byte Coded Character Set - Part 1:
4493
              Latin Alphabet Nr 1", 1987, JTC1/SC2.
4494
       [ISO10175]
4495
              ISO/IEC 10175 Document Printing Application (DPA), June 1996.
4496
       [LDPA]
4497
              T. Hastings, S. Isaacson, M. MacKay, C. Manros, D. Taylor, P. Zehler, "LDPA - Lightweight
4498
              Document Printing Application", October 1996,
4499
              ftp://ftp.pwg.org/pub/pwg/ipp/historic/ldpa/ldpa8.pdf.gz
4500
       [P1387.4]
4501
              Kirk, M. (editor), POSIX System Administration - Part 4: Printing Interfaces, POSIX 1387.4 D8,
4502
              1994.
4503
       [PSIS] Herriot, R. (editor), X/Open A Printing System Interoperability Specification (PSIS), August
4504
              1995.
4505
       [PWG]
4506
              Printer Working Group, http://www.pwg.org.
4507
```

```
[RFC1035]
4508
              P. Mockapetris, "DOMAIN NAMES - IMPLEMENTATION AND SPECIFICATION", RFC
4509
              1035, November 1987.
4510
       [RFC1179]
4511
              McLaughlin, L. III, (editor), "Line Printer Daemon Protocol" RFC 1179, August 1990.
4512
       [RFC1759]
4513
              Smith, R., Wright, F., Hastings, T., Zilles, S., and Gyllenskog, J., "Printer MIB", RFC 1759,
4514
              March 1995.
4515
       [RFC1766]
4516
              H. Alvestrand, "Tags for the Identification of Languages", RFC 1766, March 1995.
4517
       [RFC1903]
4518
              J. Case, et.al., "Textual Conventions for Version 2 of the Simple Network Management Protocol
4519
              (SNMP v2)" RFC 1903, January 1996.
4520
       [RFC1952]
4521
              P. Deutsch, "GZIP file format specification version 4.3", RFC 1952, May 1996.
4522
       [RFC2026]
4523
              S. Bradner, "The Internet Standards Process -- Revision 3", RFC 2026, October 1996.
4524
       [RFC2045]
4525
              N. Fried, N. Borenstein, ", Multipurpose Internet Mail Extensions (MIME) Part One: Format of
4526
              Internet Message Bodies "RFC 2045, November 1996.
4527
       [RFC2046]
4528
              Multipurpose Internet Mail Extensions (MIME) Part Two: Media Types. N. Freed & N.
4529
              Borenstein, November 1996, (Obsoletes RFC1521, RFC1522, RFC1590), RFC 2046.
4530
       [RFC2048]
4531
              N. Freed, J. Klensin & J. Postel, "Multipurpose Internet Mail Extension (MIME) Part Four:
4532
              Registration Procedures". RFC 2048, November 1996.
4533
       [RFC2068]
4534
              R. Fielding, J. Gettys, J. Mogul, H. Frystyk, T. Berners-Lee, "Hypertext Transfer Protocol -
4535
              HTTP/1.1", RFC 2068, January 1997
4536
       [RFC2069]
4537
              J. Franks, P. Hallam-Baker, J. Hostetler, P. Leach, A. Luotonen, E. Sink, L. Stewart, "An
4538
              Extension to HTTP: Digest Access Authentication", RFC-2069, Jan 1997.
4539
       [RFC2119]
4540
              S. Bradner, "Key words for use in RFCs to Indicate Requirement Levels", RFC 2119, March
4541
```

deBry, Hastings, Herriot, Isaacson, Powell

1997

4542

[Page 124]

```
[RFC2228]
4543
              M. Horowitz, S. Lunt, "FTP Security Extensions", RFC 2228, October 1997.
4544
       [RFC2246]
4545
              T. Dierks, C. Allen, "The TLS Protocol Version 1.0", RFC 2246, January 1999.
4546
       [RFC2277]
4547
              H. Alvestrand, "IETF Policy on Character Sets and Languages" RFC 2277, January 1998.
4548
       [RFC2278]
4549
              N. Freed, J. Postel: "IANA CharSet Registration Procedures", RFC 2278, January 1998.
4550
       [RFC2279]
4551
              F. Yergeau, "UTF-8, a transformation format of ISO 10646", RFC 2279. January 1998.
4552
       [RFC2316]
4553
              S. Bellovin, "Report of the IAB Security Architecture Workshop", RFC 2316, April 1998.
4554
       [RFC2396]
4555
              Berners-Lee, T., Fielding, R., Masinter, L., "Uniform Resource Identifiers (URI): Generic
4556
              Syntax", RFC 2396, August 1998.
4557
       [SSL]
4558
              Netscape, The SSL Protocol, Version 3, (Text version 3.02), November 1996.
4559
       [SWP]
4560
              P. Moore, B. Jahromi, S. Butler, "Simple Web Printing SWP/1.0", May 7, 1997,
4561
              ftp://ftp.pwg.org/pub/pwg/ipp/new_PRO/swp9705.pdf
4562
       10. Notices
4563
       The IETF takes no position regarding the validity or scope of any intellectual property or other rights that
4564
       might be claimed to pertain to the implementation or use of the technology described in this document
4565
       or the extent to which any license under such rights might or might not be available; neither does it
4566
       represent that it has made any effort to identify any such rights. Information on the IETF's procedures
4567
       with respect to rights in standards-track and standards-related documentation can be found in BCP-
4568
       11[BCP-11]. Copies of claims of rights made available for publication and any assurances of licenses to
4569
       be made available, or the result of an attempt made to obtain a general license or permission for the use
4570
       of such proprietary rights by implementers or users of this specification can be obtained from the IETF
4571
```

The IETF invites any interested party to bring to its attention any copyrights, patents or patent

applications, or other proprietary rights which may cover technology that may be required to practice this

standard. Please address the information to the IETF Executive Director.

Secretariat.

4572

February 17, 1999

- 4576 Copyright (C) The Internet Society (1999). All Rights Reserved.
- This document and translations of it may be copied and furnished to others, and derivative works that
- comment on or otherwise explain it or assist in its implementation may be prepared, copied, published
- and distributed, in whole or in part, without restriction of any kind, provided that the above copyright
- notice and this paragraph are included on all such copies and derivative works. However, this document
- itself may not be modified in any way, such as by removing the copyright notice or references to the
- Internet Society or other Internet organizations, except as needed for the purpose of developing Internet
- standards in which case the procedures for copyrights defined in the Internet Standards process must be
- followed, or as required to translate it into languages other than English.
- The limited permissions granted above are perpetual and will not be revoked by the Internet Society or
- 4586 its successors or assigns.
- This document and the information contained herein is provided on an "AS IS" basis and THE
- 4588 INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIMS ALL
- WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY
- 4590 WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY
- 4591 RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A
- 4592 PARTICULAR PURPOSE.

#### 11. Author's Address

Scott A. Isaacson (Editor)

Novell, Inc.

4596 122 E 1700 S

4597 Provo, UT 84606

4598

4593

4599 Phone: 801-861-7366 4600 Fax: 801-861-2517

e-mail: sisaacson@novell.com

4602

4603 Tom Hastings

4604 Xerox Corporation

4605 737 Hawaii St. ESAE 231

El Segundo, CA 90245

4606 4607

4608 Phone: 310-333-6413 4609 Fax: 310-333-5514

e-mail: hastings@cp10.es.xerox.com

4611 4612

Robert Herriot

4613 Xerox Corp.

4614 3400 Hill View Ave, Building 1

4615 Palo Alto, CA 94304

```
Phone: 650-813-7696
4617
4618
              Fax:
                      650-813-6860
              e-mail: robert.herriot@pahv.xerox.com
4619
4620
              Roger deBry
4621
              HUC/003G
4622
              IBM Corporation
4623
              P.O. Box 1900
4624
              Boulder, CO 80301-9191
4625
4626
              Phone: (303) 924-4080
4627
              Fax: (303) 924-9889
4628
              e-mail: debry@vnet.ibm.com
4629
4630
              Patrick Powell
4631
              Astart Technologies
4632
              9475 Chesapeake Dr., Suite D
4633
              San Diego, CA 95123
4634
4635
              Phone: (619) 874-6543
4636
              Fax: (619) 279-8424
4637
              e-mail: papowell@astart.com
4638
4639
              IPP Mailing List: ipp@pwg.org
4640
              IPP Mailing List Subscription: ipp-request@pwg.org
4641
              IPP Web Page: http://www.pwg.org/ipp/
4642
4643
       Implementers of this specification are encouraged to join IPP Mailing List in order to participate in any
4644
       discussions of clarification issues and review of registration proposals for additional attributes and
4645
       values.
4646
4647
       Other Participants:
4648
              Chuck Adams - Tektronix
4649
              Jeff Barnett - IBM
4650
              Ron Bergman - Dataproducts Corp.
4651
              Sylvan Butler - HP
4652
```

Babek Jahromi - Microsoft

4653

4654

4655

4656

4657

4658

4660

David Kellerman - Northlake Software

Lee Farrell - Canon Information Systems

Keith Carter - IBM Corporation

Andy Davidson - Tektronix

Jeff Copeland - QMS

Mabry Dozier - QMS

Steve Gebert - IBM

Rick Landau - Digital

```
Greg LeClair - Epson
4662
              Harry Lewis - IBM
4663
              Pete Loya - HP
4664
              Ray Lutz - Cognisys
4665
              Mike MacKay - Novell, Inc.
4666
              Daniel Manchala - Xerox
4667
              Carl-Uno Manros - Xerox
4668
              Jay Martin - Underscore
4669
              Larry Masinter - Xerox
4670
              Stan McConnell - Xerox
4671
4672
              Ira McDonald - High North Inc.
              Paul Moore - Microsoft
4673
              Tetsuya Morita - Ricoh
4674
              Yuichi Niwa - Ricoh
4675
              Pat Nogay - IBM
4676
              Ron Norton - Printronics
4677
              Bob Pentecost - HP
4678
              Rob Rhoads - Intel
4679
              Xavier Riley - Xerox
4680
              David Roach - Unisys
4681
              Stuart Rowley - Kyocera
4682
              Hiroyuki Sato - Canon
4683
              Bob Setterbo - Adobe
4684
              Devon Taylor - Novell, Inc.
4685
              Mike Timperman - Lexmark
4686
              Randy Turner - Sharp
4687
              Atsushi Yuki - Kyocera
4688
              Rick Yardumian - Xerox
4689
              Lloyd Young - Lexmark
4690
              Bill Wagner - DPI
4691
              Jim Walker - DAZEL
4692
              Chris Wellens - Interworking Labs
4693
              Rob Whittle - Novell, Inc.
4694
              Don Wright - Lexmark
4695
              Peter Zehler - Xerox
4696
              Steve Zilles - Adobe
4697
```

## 4698 12. Formats for IPP Registration Proposals

- In order to propose an IPP extension for registration, the proposer must submit an application to IANA
- by email to "iana@iana.org" or by filling out the appropriate form on the IANA web pages
- (http://www.iana.org). This section specifies the required information and the formats for proposing
- registrations of extensions to IPP as provided in Section 6 for:
- 4703
- 1. type2 'keyword' attribute values
- 2. type3 'keyword' attribute values
- 3. type2 'enum' attribute values
- 4. type3 'enum' attribute values
- 5. attributes
- 6. attribute syntaxes
- 4710 7. operations
- 4711 8. status codes
- 12.1 Type2 keyword attribute values registration
- 4713 Type of registration: type2 keyword attribute value
- Name of attribute to which this keyword specification is to be added:
- Proposed keyword name of this keyword value:
- Specification of this keyword value (follow the style of IPP Model Section 4.1.2.3):
- Name of proposer:
- 4718 Address of proposer:
- Email address of proposer:
- 4720
- Note: For type2 keywords, the Designated Expert will be the point of contact for the approved
- 4722 registration specification, if any maintenance of the registration specification is needed.
- 4723 12.2 Type3 keyword attribute values registration
- Type of registration: type3 keyword attribute value
- Name of attribute to which this keyword specification is to be added:
- Proposed keyword name of this keyword value:
- Specification of this keyword value (follow the style of IPP Model Section 4.1.2.3):
- Name of proposer:
- 4729 Address of proposer:
- 4730 Email address of proposer:

4731

- Note: For type3 keywords, the proposer will be the point of contact for the approved registration
- specification, if any maintenance of the registration specification is needed.
- 12.3 Type2 enum attribute values registration
- Type of registration: type2 enum attribute value

deBry, Hastings, Herriot, Isaacson, Powell

- Name of attribute to which this enum specification is to be added:
- Keyword symbolic name of this enum value:
- Numeric value (to be assigned by the IPP Designated Expert in consultation with IANA):
- Specification of this enum value (follow the style of IPP Model Section 4.1.4):
- 4740 Name of proposer:
- 4741 Address of proposer:
- Email address of proposer:

- Note: For type2 enums, the Designated Expert will be the point of contact for the approved registration
- specification, if any maintenance of the registration specification is needed.
- 12.4 Type3 enum attribute values registration
- Type of registration: type3 enum attribute value
- Name of attribute to which this enum specification is to be added:
- Keyword symbolic name of this enum value:
- Numeric value (to be assigned by the IPP Designated Expert in consultation with IANA):
- Specification of this enum value (follow the style of IPP Model Section 4.1.4):
- Name of proposer:
- 4753 Address of proposer:
- Email address of proposer:

4755

- Note: For type3 enums, the proposer will be the point of contact for the approved registration
- specification, if any maintenance of the registration specification is needed.
- 4758 12.5 Attribute registration
- 4759 Type of registration: attribute
- Proposed keyword name of this attribute:
- Types of attribute (Operation, Job Template, Job Description, Printer Description):
- Operations to be used with if the attribute is an operation attribute:
- Object (Job, Printer, etc. if bound to an object):
- Attribute syntax(es) (include 1setOf and range as in Section 4.2):
- 4765 If attribute syntax is 'keyword' or 'enum', is it type2 or type3:
- 4766 If this is a Printer attribute, MAY the value returned depend on "document-format" (See Section 6.2):
- 4767 If this is a Job Template attribute, how does its specification depend on the value of the "multiple-
- document-handling" attribute:
- Specification of this attribute (follow the style of IPP Model Section 4.2):
- 4770 Name of proposer:
- 4771 Address of proposer:
- Email address of proposer:

- Note: For attributes, the IPP Designated Expert will be the point of contact for the approved registration
- specification, if any maintenance of the registration specification is needed.

- 4776 12.6 Attribute Syntax registration
- 4777 Type of registration: attribute syntax
- Proposed name of this attribute syntax:
- Type of attribute syntax (integer, octetString, character-string, see [IPP-PRO]):
- Numeric value (to be assigned by the IPP Designated Expert in consultation with IANA):
- Specification of this attribute (follow the style of IPP Model Section 4.1):
- Name of proposer:
- 4783 Address of proposer:
- 4784 Email address of proposer:

- Note: For attribute syntaxes, the IPP Designated Expert will be the point of contact for the approved
- registration specification, if any maintenance of the registration specification is needed.
- 4788 12.7 Operation registration
- 4789 Type of registration: operation
- Proposed name of this operation:
- Numeric operation-id value (to be assigned by the IPP Designated Expert in consultation with IANA):
- Object Target (Job, Printer, etc. that operation is upon):
- Specification of this attribute (follow the style of IPP Model Section 3):
- Name of proposer:
- 4795 Address of proposer:
- Email address of proposer:

4797

- Note: For operations, the IPP Designated Expert will be the point of contact for the approved
- registration specification, if any maintenance of the registration specification is needed.
- 4800 12.8 Attribute Group registration
- 4801 Type of registration: attribute group
- 4802 Proposed name of this attribute group:
- Numeric tag according to [IPP-PRO] (to be assigned by the IPP Designated Expert in consultation with
- 4804 IANA):
- Operation requests and group number for each operation in which the attribute group occurs:
- Operation responses and group number for each operation in which the attribute group occurs:
- Specification of this attribute group (follow the style of IPP Model Section 3):
- 4808 Name of proposer:
- 4809 Address of proposer:
- 4810 Email address of proposer:

- Note: For attribute groups, the IPP Designated Expert will be the point of contact for the approved
- registration specification, if any maintenance of the registration specification is needed.

- 4814 12.9 Status code registration
- 4815 Type of registration: status code
- 4816 Keyword symbolic name of this status code value:
- Numeric value (to be assigned by the IPP Designated Expert in consultation with IANA):
- Operations that this status code may be used with:
- Specification of this status code (follow the style of IPP Model Section 14 APPENDIX B: Status Codes
- and Suggested Status Code Messages):
- Name of proposer:
- 4822 Address of proposer:
- 4823 Email address of proposer:

- Note: For status codes, the Designated Expert will be the point of contact for the approved registration
- specification, if any maintenance of the registration specification is needed.
- 4827 13. APPENDIX A: Terminology
- This specification uses the terminology defined in this section.
- 4829 13.1 Conformance Terminology
- The key words "MUST", "MUST NOT", "REQUIRED", "SHOULD", "SHOULD NOT",
- "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in
- 4832 RFC 2119 [RFC2119].
- 4833 13.1.1 NEED NOT
- This term is not included in RFC 2119. The verb "NEED NOT" indicates an action that the subject of
- the sentence does not have to implement in order to claim conformance to the standard. The verb
- "NEED NOT" is used instead of "MAY NOT" since "MAY NOT" sounds like a prohibition.
- 4837 13.2 Model Terminology
- 4838 13.2.1 Keyword
- 4839 Keywords are used within this document as identifiers of semantic entities within the abstract model (see
- section 4.1.2.3). Attribute names, some attribute values, attribute syntaxes, and attribute group names
- are represented as keywords.
- 4842 13.2.2 Attributes
- An attribute is an item of information that is associated with an instance of an IPP object. An attribute
- consists of an attribute name and one or more attribute values. Each attribute has a specific attribute

- syntax. All object attributes are defined in section 3.3.5 and all operation attributes are defined in
- section 3.
- Job Template Attributes are described in section 4.2. The client optionally supplies Job Template
- attributes in a create request (operation requests that create Job objects). The Printer object has
- associated attributes which define supported and default values for the Printer.
- 4850 13.2.2.1 Attribute Name
- Each attribute is uniquely identified in this document by its attribute name. An attribute name is a
- keyword. The keyword attribute name is given in the section header describing that attribute. In running
- text in this document, attribute names are indicated inside double quotation marks (") where the
- quotation marks are not part of the keyword itself.
- 4855 13.2.2.2 Attribute Group Name
- Related attributes are grouped into named groups. The name of the group is a keyword. The group
- name may be used in place of naming all the attributes in the group explicitly. Attribute groups are
- defined in section 3.
- 4859 13.2.2.3 Attribute Value
- Each attribute has one or more values. Attribute values are represented in the syntax type specified for
- that attribute. In running text in this document, attribute values are indicated inside single quotation
- marks ('), whether their attribute syntax is keyword, integer, text, etc. where the quotation marks are not
- part of the value itself.
- 4864 13.2.2.4 Attribute Syntax
- Each attribute is defined using an explicit syntax type. In this document, each syntax type is defined as a
- keyword with specific meaning. The "Encoding and Transport" document [IPP-PRO] indicates the
- actual "on-the-wire" encoding rules for each syntax type. Attribute syntax types are defined in section
- 4868 4.1.
- 4869 13.2.3 Supports
- By definition, a Printer object supports an attribute only if that Printer object responds with the
- corresponding attribute populated with some value(s) in a response to a query for that attribute. A
- Printer object supports an attribute value if the value is one of the Printer object's "supported values"
- attributes. The device behind a Printer object may exhibit a behavior that corresponds to some IPP
- attribute, but if the Printer object, when queried for that attribute, doesn't respond with the attribute, then
- as far as IPP is concerned, that implementation does not support that feature. If the Printer object's "xxx-
- supported" attribute is not populated with a particular value (even if that value is a legal value for that
- attribute), then that Printer object does not support that particular value.

A conforming implementation MUST support all REQUIRED attributes. However, even for REQUIRED attributes, conformance to IPP does not mandate that all implementations support all possible values representing all possible job processing behaviors and features. For example, if a given instance of a Printer supports only certain document formats, then that Printer responds with the "document-format-supported" attribute populated with a set of values, possibly only one, taken from the entire set of possible values defined for that attribute. This limited set of values represents the Printer's set of supported document formats. Supporting an attribute and some set of values for that attribute enables IPP end users to be aware of and make use of those features associated with that attribute and those values. If an implementation chooses to not support an attribute or some specific value, then IPP end users would have no ability to make use of that feature within the context of IPP itself. However, due to existing practice and legacy systems which are not IPP aware, there might be some other mechanism outside the scope of IPP to control or request the "unsupported" feature (such as embedded instructions within the document data itself).

For example, consider the "finishings-supported" attribute.

- 1) If a Printer object is not physically capable of stapling, the "finishings-supported" attribute MUST NOT be populated with the value of 'staple'.
- 2) A Printer object is physically capable of stapling, however an implementation chooses not to support stapling in the IPP "finishings" attribute. In this case, 'staple' MUST NOT be a value in the "finishings-supported" Printer object attribute. Without support for the value 'staple', an IPP end user would have no means within the protocol itself to request that a Job be stapled. However, an existing document data formatter might be able to request that the document be stapled directly with an embedded instruction within the document data. In this case, the IPP implementation does not "support" stapling, however the end user is still able to have some control over the stapling of the completed job.
- 3) A Printer object is physically capable of stapling, and an implementation chooses to support stapling in the IPP "finishings" attribute. In this case, 'staple' MUST be a value in the "finishings-supported" Printer object attribute. Doing so, would enable end users to be aware of and make use of the stapling feature using IPP attributes.

Even though support for Job Template attributes by a Printer object is OPTIONAL, it is RECOMMENDED that if the device behind a Printer object is capable of realizing any feature or function that corresponds to an IPP attribute and some associated value, then that implementation SHOULD support that IPP attribute and value.

The set of values in any of the supported value attributes is set (populated) by some administrative process or automatic sensing mechanism that is outside the scope of this IPP/1.1 document. For administrative policy and control reasons, an administrator may choose to make only a subset of possible values visible to the end user. In this case, the real output device behind the IPP Printer abstraction may be capable of a certain feature, however an administrator is specifying that access to that feature not be exposed to the end user through the IPP protocol. Also, since a Printer object may represent a logical print device (not just a physical device) the actual process for supporting a value is undefined and left up to the implementation. However, if a Printer object supports a value, some manual human action may be needed to realize the semantic action associated with the value, but no end user action is required.

- For example, if one of the values in the "finishings-supported" attribute is 'staple', the actual process 4920
- might be an automatic staple action by a physical device controlled by some command sent to the 4921
- device. Or, the actual process of stapling might be a manual action by an operator at an operator 4922
- attended Printer object. 4923
- For another example of how supported attributes function, consider a system administrator who desires 4924
- to control all print jobs so that no job sheets are printed in order to conserve paper. To force no job 4925
- sheets, the system administrator sets the only supported value for the "job-sheets-supported" attribute to 4926
- 'none'. In this case, if a client requests anything except 'none', the create request is rejected or the "job-4927
- sheets" value is ignored (depending on the value of "ipp-attribute-fidelity"). To force the use of job 4928
- start/end sheets on all jobs, the administrator does not include the value 'none' in the "job-sheets-4929
- supported" attribute. In this case, if a client requests 'none', the create request is rejected or the "job-4930
- sheets" value is ignored (again depending on the value of "ipp-attribute-fidelity"). 4931
- 13.2.4 print-stream page 4932
- A "print-stream page" is a page according to the definition of pages in the language used to express the 4933
- document data. 4934
- 13.2.5 impression 4935
- An "impression" is the image (possibly many print-stream pages in different configurations) imposed 4936
- onto a single media page. 4937
- 14. APPENDIX B: Status Codes and Suggested Status Code Messages 4938
- This section defines status code enum keywords and values that are used to provide semantic 4939
- information on the results of an operation request. Each operation response MUST include a status 4940
- code. The response MAY also contain a status message that provides a short textual description of the 4941
- status. The status code is intended for use by automata, and the status message is intended for the human 4942
- end user. Since the status message is an OPTIONAL component of the operation response, an IPP 4943
- application (i.e., a browser, GUI, print driver or gateway) is NOT REQUIRED to examine or display the 4944
- status message, since it MAY not be returned to the application. 4945
- The prefix of the status keyword defines the class of response as follows: 4946
- "informational" Request received, continuing process 4947
- "successful" The action was successfully received, understood, and accepted 4948
- "redirection" Further action must be taken in order to complete the request 4949
- "client-error" The request contains bad syntax or cannot be fulfilled 4950
- "server-error" The IPP object failed to fulfill an apparently valid request 4951

As with type2 enums, IPP status codes are extensible. IPP clients are NOT REQUIRED to understand 4953

the meaning of all registered status codes, though such understanding is obviously desirable. However, 4954

- 4955 IPP clients MUST understand the class of any status code, as indicated by the prefix, and treat any
- unrecognized response as being equivalent to the first status code of that class, with the exception that an
- unrecognized response MUST NOT be cached. For example, if an unrecognized status code of "client-
- error-xxx-yyy" is received by the client, it can safely assume that there was something wrong with its
- request and treat the response as if it had received a "client-error-bad-request" status code. In such cases,
- 4960 IPP applications SHOULD present the OPTIONAL message (if present) to the end user since the
- message is likely to contain human readable information which will help to explain the unusual status.
- The name of the enum is the suggested status message for US English.
- The status code values range from 0x0000 to 0x7FFF. The value ranges for each status code class are as follows:
- 4965 "successful" 0x0000 to 0x00FF
- 4966 "informational" 0x0100 to 0x01FF
- 4967 "redirection" 0x0200 to 0x02FF
- 4968 "client-error" 0x0400 to 0x04FF
- 4969 "server-error" 0x0500 to 0x05FF
- The top half (128 values) of each range (0x0n40 to 0x0nFF, for n = 0 to 5) is reserved for private use
- within each status code class. Values 0x0600 to 0x7FFF are reserved for future assignment and MUST
- 4973 NOT be used.

- 4974 14.1 Status Codes
- Each status code is described below. Section 14.1.5.9 contains a table that indicates which status codes
- apply to which operations. The Implementer's Guide [IPP-IIG] describe the suggested steps for
- 4977 processing IPP attributes for all operations, including returning status codes.
- 4978 14.1.1 Informational
- This class of status code indicates a provisional response and is to be used for informational purposes
- 4980 only.
- There are no status codes defined in IPP/1.1 for this class of status code.
- 4982 14.1.2 Successful Status Codes
- This class of status code indicates that the client's request was successfully received, understood, and
- 4984 accepted.
- 4985 14.1.2.1 successful-ok (0x0000)
- The request has succeeded and no request attributes were substituted or ignored. In the case of a
- response to a create request, the 'successful-ok' status code indicates that the request was successfully
- received and validated, and that the Job object has been created; it does not indicate that the job has been

- 4989 processed. The transition of the Job object into the 'completed' state is the only indicator that the job has
- been printed.
- 4991 14.1.2.2 successful-ok-ignored-or-substituted-attributes (0x0001)
- The request has succeeded, but some supplied (1) attributes were ignored or (2) unsupported values were
- substituted with supported values or were ignored in order to perform the operation without rejecting it.
- Unsupported attributes, attribute syntaxes, or values MUST be returned in the Unsupported Attributes
- group of the response for all operations. There is an exception to this rule for the query operations: Get-
- Printer-Attributes, Get-Jobs, and Get-Job-Attributes for the "requested-attributes" operation attribute
- only. When the supplied values of the "requested-attributes" operation attribute are requesting attributes
- that are not supported, the IPP object MAY, but is NOT REQUIRED to, return the "requested-attributes"
- attribute in the Unsupported Attribute response group (with the unsupported values only). See section
- 5000 3.2.1.2.
- 5001 14.1.2.3 successful-ok-conflicting-attributes (0x0002)
- The request has succeeded, but some supplied attribute values conflicted with the values of other
- supplied attributes. These conflicting values were either (1) substituted with (supported) values or (2)
- the attributes were removed in order to process the job without rejecting it. Attributes or values which
- conflict with other attributes and have been substituted or ignored MUST be returned in the Unsupported
- Attributes group of the response for all operations as supplied by the client. See section 3.2.1.2.
- 5007 14.1.3 Redirection Status Codes
- This class of status code indicates that further action needs to be taken to fulfill the request.
- There are no status codes defined in IPP/1.1 for this class of status code.
- 5010 14.1.4 Client Error Status Codes
- This class of status code is intended for cases in which the client seems to have erred. The IPP object
- 5012 SHOULD return a message containing an explanation of the error situation and whether it is a temporary
- or permanent condition.
- 5014 14.1.4.1 client-error-bad-request (0x0400)
- The request could not be understood by the IPP object due to malformed syntax (such as the value of a
- 5016 fixed length attribute whose length does not match the prescribed length for that attribute see the
- Implementer's Guide [IPP-IIG] ). The IPP application SHOULD NOT repeat the request without
- 5018 modifications.

- 5019 14.1.4.2 client-error-forbidden (0x0401)
- The IPP object understood the request, but is refusing to fulfill it. Additional authentication information
- or authorization credentials will not help and the request SHOULD NOT be repeated. This status code
- is commonly used when the IPP object does not wish to reveal exactly why the request has been refused
- or when no other response is applicable.
- 5024 14.1.4.3 client-error-not-authenticated (0x0402)
- The request requires user authentication. The IPP client may repeat the request with suitable
- authentication information. If the request already included authentication information, then this status
- code indicates that authorization has been refused for those credentials. If this response contains the
- same challenge as the prior response, and the user agent has already attempted authentication at least
- once, then the response message may contain relevant diagnostic information. This status codes reveals
- more information than "client-error-forbidden".
- 5031 14.1.4.4 client-error-not-authorized (0x0403)
- The requester is not authorized to perform the request. Additional authentication information or
- authorization credentials will not help and the request SHOULD NOT be repeated. This status code is
- used when the IPP object wishes to reveal that the authentication information is understandable.
- however, the requester is explicitly not authorized to perform the request. This status codes reveals
- more information than "client-error-forbidden" and "client-error-not-authenticated".
- 5037 14.1.4.5 client-error-not-possible (0x0404)
- This status code is used when the request is for something that can not happen. For example, there
- might be a request to cancel a job that has already been canceled or aborted by the system. The IPP
- client SHOULD NOT repeat the request.
- 5041 14.1.4.6 client-error-timeout (0x0405)
- The client did not produce a request within the time that the IPP object was prepared to wait. For
- example, a client issued a Create-Job operation and then, after a long period of time, issued a Send-
- Document operation and this error status code was returned in response to the Send-Document request
- (see section 3.3.1). The IPP object might have been forced to clean up resources that had been held for
- the waiting additional Documents. The IPP object was forced to close the Job since the client took too
- long. The client SHOULD NOT repeat the request without modifications.
- 5048 14.1.4.7 client-error-not-found (0x0406)
- The IPP object has not found anything matching the request URI. No indication is given of whether the
- condition is temporary or permanent. For example, a client with an old reference to a Job (a URI) tries
- to cancel the Job, however in the mean time the Job might have been completed and all record of it at the
- Printer has been deleted. This status code, 'client-error-not-found' is returned indicating that the

- referenced Job can not be found. This error status code is also used when a client supplies a URI as a
- reference to the document data in either a Print-URI or Send-URI operation, but the document can not be
- 5055 found.
- In practice, an IPP application should avoid a not found situation by first querying and presenting a list
- of valid Printer URIs and Job URIs to the end-user.
- 5058 14.1.4.8 client-error-gone (0x0407)
- The requested object is no longer available and no forwarding address is known. This condition should
- be considered permanent. Clients with link editing capabilities should delete references to the request
- URI after user approval. If the IPP object does not know or has no facility to determine, whether or not
- the condition is permanent, the status code "client-error-not-found" should be used instead.
- This response is primarily intended to assist the task of maintenance by notifying the recipient that the
- resource is intentionally unavailable and that the IPP object administrator desires that remote links to
- that resource be removed. It is not necessary to mark all permanently unavailable resources as "gone" or
- to keep the mark for any length of time -- that is left to the discretion of the IPP object administrator.
- 5067 14.1.4.9 client-error-request-entity-too-large (0x0408)
- The IPP object is refusing to process a request because the request entity is larger than the IPP object is
- willing or able to process. An IPP Printer returns this status code when it limits the size of print jobs and
- it receives a print job that exceeds that limit or when the attributes are so many that their encoding
- causes the request entity to exceed IPP object capacity.
- 5072 14.1.4.10 client-error-request-value-too-long (0x0409)
- The IPP object is refusing to service the request because one or more of the client-supplied attributes has
- a variable length value that is longer than the maximum length specified for that attribute. The IPP
- object might not have sufficient resources (memory, buffers, etc.) to process (even temporarily),
- interpret, and/or ignore a value larger than the maximum length. Another use of this error code is when
- the IPP object supports the processing of a large value that is less than the maximum length, but during
- the processing of the request as a whole, the object may pass the value onto some other system
- component which is not able to accept the large value. For more details, see the Implementer's Guide
- 5080 [IPP-IIG].
- Note: For attribute values that are URIs, this rare condition is only likely to occur when a client has
- improperly submitted a request with long query information (e.g. an IPP application allows an end-user
- to enter an invalid URI), when the client has descended into a URI "black hole" of redirection (e.g., a
- redirected URI prefix that points to a suffix of itself), or when the IPP object is under attack by a client
- attempting to exploit security holes present in some IPP objects using fixed-length buffers for reading or
- attempting to exploit security hores present in some if I objects using fixed length outlets for real
- manipulating the Request-URI.

- 5087 14.1.4.11 client-error-document-format-not-supported (0x040A)
- The IPP object is refusing to service the request because the document data is in a format, as specified in
- the "document-format" operation attribute, that is not supported by the Printer object. This error is
- returned independent of the client-supplied "ipp-attribute-fidelity". The Printer object MUST return this
- status code, even if there are other attributes that are not supported as well, since this error is a bigger
- problem than with Job Template attributes.
- 5093 14.1.4.12 client-error-attributes-or-values-not-supported (0x040B)
- In a create request, if the Printer object does not support one or more attributes, attribute syntaxes, or
- attribute values supplied in the request and the client supplied the "ipp-attributes-fidelity" operation
- attribute with the 'true' value, the Printer object MUST return this status code. For example, if the
- request indicates iso-a4' media, but that media type is not supported by the Printer object. Or, if the
- client supplies an optional attribute and the attribute itself is not even supported by the Printer. If the
- "ipp-attribute-fidelity" attribute is 'false', the Printer MUST ignore or substitute values for unsupported
- attributes and values rather than reject the request and return this status code.
- For any operation where a client requests attributes (such as a Get-Jobs, Get-Printer-Attributes, or Get-
- Job-Attributes operation), if the IPP object does not support one or more of the requested attributes, the
- 5103 IPP object simply ignores the unsupported requested attributes and processes the request as if they had
- not been supplied, rather than returning this status code. In this case, the IPP object MUST return the
- 3105 'successful-ok-ignored-or-substituted-attributes' status code and MAY return the unsupported attributes
- as values of the "requested-attributes" in the Unsupported Attributes Group (see section 14.1.2.2).
- 5107 14.1.4.13 client-error-uri-scheme-not-supported (0x040C)
- The type of the client supplied URI in a Print-URI or a Send-URI operation is not supported.
- 5109 14.1.4.14 client-error-charset-not-supported (0x040D)
- For any operation, if the IPP Printer does not support the charset supplied by the client in the "attributes-
- charset" operation attribute, the Printer MUST reject the operation and return this status and any 'text' or
- 'name' attributes using the 'utf-8' charset (see Section 3.1.4.1).
- 5113 14.1.4.15 client-error-conflicting-attributes (0x040E)
- The request is rejected because some attribute values conflicted with the values of other attributes which
- 5115 this specification does not permit to be substituted or ignored.
- 5116 14.1.5 Server Error Status Codes
- This class of status codes indicates cases in which the IPP object is aware that it has erred or is incapable
- of performing the request. The IPP object SHOULD include a message containing an explanation of the
- error situation, and whether it is a temporary or permanent condition.

- 5120 14.1.5.1 server-error-internal-error (0x0500)
- The IPP object encountered an unexpected condition that prevented it from fulfilling the request. This
- error status code differs from "server-error-temporary-error" in that it implies a more permanent type of
- internal error. It also differs from "server-error-device-error" in that it implies an unexpected condition
- 5124 (unlike a paper-jam or out-of-toner problem which is undesirable but expected). This error status code
- indicates that probably some knowledgeable human intervention is required.
- 5126 14.1.5.2 server-error-operation-not-supported (0x0501)
- The IPP object does not support the functionality required to fulfill the request. This is the appropriate
- response when the IPP object does not recognize an operation or is not capable of supporting it.
- 5129 14.1.5.3 server-error-service-unavailable (0x0502)
- The IPP object is currently unable to handle the request due to a temporary overloading or maintenance
- of the IPP object. The implication is that this is a temporary condition which will be alleviated after
- some delay. If known, the length of the delay may be indicated in the message. If no delay is given, the
- 5133 IPP application should handle the response as it would for a "server-error-temporary-error" response. If
- the condition is more permanent, the error status codes "client-error-gone" or "client-error-not-found"
- 5135 could be used.
- 5136 14.1.5.4 server-error-version-not-supported (0x0503)
- The IPP object does not support, or refuses to support, the IPP protocol version that was used in the
- request message. The IPP object is indicating that it is unable or unwilling to complete the request using
- the same version as supplied in the request other than with this error message. The response should
- contain a Message describing why that version is not supported and what other versions are supported by
- that IPP object.
- A conforming IPP/1.1 client MUST specify a valid version ('1.1' or '1.0') on each request. A conforming
- 5143 IPP/1.1 object MUST NOT return this status code to a conforming IPP/1.1 or IPP/1.0 client. An IPP
- object MUST return this status code to a non-conforming IPP client. The response MUST identify in the
- "version-number" operation attribute the closest version number that the IPP object does support. For
- example, if a client supplies version '1.0', a conforming IPP/1.1 object MUST respond with version '1.0'.
- 5147 14.1.5.5 server-error-device-error (0x0504)
- A printer error, such as a paper jam, occurs while the IPP object processes a Print or Send operation.
- The response contains the true Job Status (the values of the "job-state" and "job-state-reasons"
- attributes). Additional information can be returned in the optional "job-state-message" attribute value or
- in the OPTIONAL status message that describes the error in more detail. This error status code is only
- returned in situations where the Printer is unable to accept the create request because of such a device
- error. For example, if the Printer is unable to spool, and can only accept one job at a time, the reason it
- might reject a create request is that the printer currently has a paper jam. In many cases however, where

- 5155 the Printer object can accept the request even though the Printer has some error condition, the
- 3156 'successful-ok' status code will be returned. In such a case, the client would look at the returned Job
- Object Attributes or later query the Printer to determine its state and state reasons.
- 5158 14.1.5.6 server-error-temporary-error (0x0505)
- A temporary error such as a buffer full write error, a memory overflow (i.e. the document data exceeds
- the memory of the Printer), or a disk full condition, occurs while the IPP Printer processes an operation.
- The client MAY try the unmodified request again at some later point in time with an expectation that the
- temporary internal error condition may have been cleared. Alternatively, as an implementation option, a
- Printer object MAY delay the response until the temporary condition is cleared so that no error is
- 5164 returned.
- 5165 14.1.5.7 server-error-not-accepting-jobs (0x0506)
- A temporary error indicating that the Printer is not currently accepting jobs, because the administrator
- has set the value of the Printer's "printer-is-not-accepting-jobs" attribute to 'false' (by means outside the
- scope of this IPP/1.1 document).
- 5169 14.1.5.8 server-error-busy (0x0507)
- A temporary error indicating that the Printer is too busy processing jobs and/or other requests. The client
- 5171 SHOULD try the unmodified request again at some later point in time with an expectation that the
- temporary busy condition will have been cleared.
- 5173 14.1.5.9 server-error-job-canceled (0x0508)
- An error indicating that the job has been canceled by an operator or the system while the client was
- 5175 transmitting the data to the IPP Printer. If a job-id and job-uri had been created, then they are returned in
- 5176 the Print-Job, Send-Document, or Send-URI response as usual; otherwise, no job-id and job-uri are
- returned in the response.

### 5178 14.2 Status Codes for IPP Operations

```
PJ = Print-Job, PU = Print-URI, CJ = Create-Job, SD = Send-Document
5179
     SU = Send-URI, V = Validate-Job, GA = Get-Job-Attributes and
5180
     Get-Printer-Attributes, GJ = Get-Jobs, C = Cancel-Job
5181
5182
                                                        IPP Operations
5183
                                                 PJ PU CJ SD SU V GA GJ C
5184
     IPP Status Keyword
5185
     successful-ok
5186
                                                 X
                                                     Х
                                                        X
                                                           X
                                                              X
                                                                  ХХ
                                                                       X
                                                                          Х
     successful-ok-ignored-or-substituted-
5187
                                                 X
                                                     x
                                                        X
                                                           Х
                                                              Х
                                                                  хх
                                                                          Х
                                                                       X
          attributes
5188
     successful-ok-conflicting-attributes
5189
                                                 Х
                                                           Х
                                                    X
                                                                  x x
                                                        X
                                                              X
                                                                       X
                                                                          X
     client-error-bad-request
5190
                                                 Х
                                                    х
                                                        х
                                                           х
                                                              х
                                                                 хх
                                                                       х
                                                                          х
     client-error-forbidden
5191
                                                 x
                                                    х
                                                        Х
                                                           Х
                                                                  хх
                                                                          х
                                                              X
     client-error-not-authenticated
                                                 Х
                                                    х
                                                           X
                                                                  хх
                                                        Х
                                                              X
                                                                       Х
                                                                          X
     client-error-not-authorized
5193
                                                 X
                                                     Х
                                                        X
                                                           X
                                                              X
                                                                  хх
                                                                       X
     client-error-not-possible
5194
                                                                  хх
                                                 X
                                                     X
                                                        Х
                                                           X
                                                              Х
                                                                       X
                                                                          X
     client-error-timeout
5195
                                                           X
                                                              Х
     client-error-not-found
5196
                                                           х
                                                              х
                                                                 хх
                                                 X
                                                    X
                                                        X
                                                                       X
                                                                          X
     client-error-gone
5197
                                                 Х
                                                    х
                                                        x
                                                           х
                                                              х
                                                                 хх
                                                                       х
                                                                          х
     client-error-request-entity-too-large
                                                           х
5198
                                                 X
                                                    X
                                                        X
                                                                 хх
                                                                          Х
     client-error-request-value-too-long
5199
                                                 x
                                                    х
                                                           X
                                                              х
                                                                 хх
                                                                       х
     client-error-document-format-not-
5200
                                                 X
                                                    Х
                                                           X
                                                              Х
                                                                 хх
          supported
5201
     client-error-attributes-or-values-not-
5202
                                                 X
                                                    X
                                                        Х
                                                           Х
                                                              X
                                                                  хх
                                                                       X
                                                                          X
5203
          supported
     client-error-uri-scheme-not-supported
5204
                                                    Х
                                                              X
5205
     client-error-charset-not-supported
                                                 х
                                                    х
                                                        х
                                                           X
                                                              х
                                                                  хх
                                                                          х
                                                                       X
     client-error-conflicting-attributes
5206
                                                 Х
                                                    х
                                                        х
                                                           Х
                                                                  хх
                                                              X
                                                                       X
     server-error-internal-error
5207
                                                 Х
                                                    х
                                                        X
                                                           Х
                                                              X
                                                                  хх
                                                                       Х
                                                                          X
     server-error-operation-not-supported
5208
                                                    X
                                                        Х
                                                           X
                                                              X
     server-error-service-unavailable
5209
                                                 X
                                                    Х
                                                        Х
                                                           X
                                                              X
                                                                  хх
                                                                       X
                                                                          X
     server-error-version-not-supported
                                                 Х
5210
                                                           X
                                                                  хх
                                                    Х
                                                        Х
                                                              X
                                                                       X
                                                                          X
     server-error-device-error
5211
                                                 x x
                                                        Х
                                                           X
                                                              x
5212
     server-error-temporary-error
                                                 X
                                                    X
                                                        X
                                                           X
                                                              X
     server-error-not-accepting-jobs
5213
                                                 X X
                                                        Х
                                                                  X
5214
     server-error-busy
                                                 Х
                                                    х
                                                        x
                                                           X
                                                              Х
                                                                  X X X
     server-error-job-canceled
5215
                                                 Х
                                                           X
```

```
HJ = Hold-Job, RJ = Release-Job, RS = Restart-Job
5217
     PP = Pause-Printer, RP = Resume-Printer, PJ = Purge-Jobs
5218
5219
                                                  IPP Operations (cont.)
5220
     IPP Status Keyword
                                                  HJ RJ RS PP RP PJ
5221
     ______
                                                           ___
5222
     successful-ok
5223
                                                     Х
                                                                  Х
                                                  X
                                                        X
                                                           X
                                                               Х
5224
     successful-ok-ignored-or-substituted-
                                                  X
                                                     Х
                                                        X
                                                           X
                                                               X
                                                                  Х
5225
          attributes
     successful-ok-conflicting-attributes
5226
                                                  X
                                                     Х
                                                               X
                                                                  Х
                                                        Х
                                                           Х
     client-error-bad-request
                                                  Х
5227
                                                           х
                                                                  x
                                                     x
                                                        X
                                                               x
     client-error-forbidden
5228
                                                  Х
                                                     х
                                                        х
                                                           X
                                                               х
                                                                  х
     client-error-not-authenticated
5229
                                                  X
                                                     X
                                                        X
                                                           X
                                                               Х
                                                                  Х
     client-error-not-authorized
5230
                                                  X
                                                     X
                                                        X
                                                           X
                                                               X
                                                                  Х
     client-error-not-possible
5231
                                                  X
                                                     Х
                                                        X
                                                           X
                                                               Х
                                                                  Х
     client-error-timeout
5232
     client-error-not-found
5233
                                                  Х
                                                     X
                                                        Х
                                                           X
                                                               X
                                                                  X
5234
     client-error-gone
                                                  Х
                                                           X
                                                        х
                                                                  х
                                                     X
                                                               X
     client-error-request-entity-too-large
5235
                                                  Х
                                                                  х
                                                     X
                                                        X
                                                           X
                                                               X
5236
     client-error-request-value-too-long
                                                  X
                                                        X
                                                           Х
                                                                  x
     client-error-document-format-not-
5237
5238
          supported
     client-error-attributes-or-values-not-
5239
                                                  X
                                                     Х
                                                        X
                                                           Х
                                                               Х
                                                                  Х
          supported
5240
     client-error-uri-scheme-not-supported
5241
     client-error-charset-not-supported
5242
                                                  X
                                                     X
                                                        Х
                                                           X
                                                               X
                                                                  Х
     client-error-conflicting-attributes
5243
                                                  х
                                                     х
                                                        х
                                                           х
                                                               х
                                                                  х
     server-error-internal-error
5244
                                                                  х
                                                  X
                                                     X
                                                        Х
                                                           X
                                                               X
     server-error-operation-not-supported
5245
                                                  Х
                                                     X
                                                        X
                                                           Х
                                                               X
                                                                  Х
     server-error-service-unavailable
5246
                                                  X
                                                     X
                                                        X
                                                           X
                                                               X
                                                                  Х
     server-error-version-not-supported
5247
                                                  X
                                                     Х
                                                        X
                                                           X
                                                               X
                                                                  X
     server-error-device-error
5248
     server-error-temporary-error
5249
5250
     server-error-not-accepting-jobs
     server-error-busy
5251
                                                  X
                                                     X
                                                        X
                                                          x x
                                                                  X
     server-error-job-canceled
5252
```

```
5253
```

```
15. APPENDIX C: "media" keyword values
```

Standard keyword values are taken from several sources. 5255

Standard values are defined (taken from DPA[ISO10175] and the Printer MIB[RFC1759]): 5256

```
'default': The default medium for the output device
5257
           iso-a4-white: Specifies the ISO A4 white medium
5258
           iso-a4-colored: Specifies the ISO A4 colored medium
5259
           "iso-a4-transparent' Specifies the ISO A4 transparent medium
5260
           iso-a3-white: Specifies the ISO A3 white medium
5261
           iso-a3-colored: Specifies the ISO A3 colored medium
5262
           iso-a5-white': Specifies the ISO A5 white medium
5263
           iso-a5-colored: Specifies the ISO A5 colored medium
5264
           iso-b4-white: Specifies the ISO B4 white medium
5265
           iso-b4-colored: Specifies the ISO B4 colored medium
5266
           iso-b5-white': Specifies the ISO B5 white medium
5267
```

iso-b5-colored: Specifies the ISO B5 colored medium 5268 5269

jis-b4-white': Specifies the JIS B4 white medium

jis-b4-colored': Specifies the JIS B4 colored medium 5270

jis-b5-white': Specifies the JIS B5 white medium

jis-b5-colored': Specifies the JIS B5 colored medium 5272

5273

5274

5271

## The following standard values are defined for North American media:

```
'na-letter-white': Specifies the North American letter white medium
5275
           'na-letter-colored': Specifies the North American letter colored medium
5276
           'na-letter-transparent': Specifies the North American letter transparent medium
5277
```

'na-legal-white': Specifies the North American legal white medium 5278 'na-legal-colored': Specifies the North American legal colored medium 5279

5280

5290

#### The following standard values are defined for envelopes: 5281

```
iso-b4-envelope: Specifies the ISO B4 envelope medium
5282
           'iso-b5-envelope': Specifies the ISO B5 envelope medium
5283
           "iso-c3-envelope": Specifies the ISO C3 envelope medium
5284
           iso-c4-envelope': Specifies the ISO C4 envelope medium
5285
           iso-c5-envelope: Specifies the ISO C5 envelope medium
5286
           iso-c6-envelope': Specifies the ISO C6 envelope medium
5287
           'iso-designated-long-envelope': Specifies the ISO Designated Long envelope medium
5288
           'na-10x13-envelope': Specifies the North American 10x13 envelope medium
5289
```

'na-9x12-envelope': Specifies the North American 9x12 envelope medium

deBry, Hastings, Herriot, Isaacson, Powell

```
'monarch-envelope': Specifies the Monarch envelope
5291
           'na-number-10-envelope': Specifies the North American number 10 business envelope medium
5292
           'na-7x9-envelope': Specifies the North American 7x9 inch envelope
5293
           'na-9x11-envelope': Specifies the North American 9x11 inch envelope
5294
           'na-10x14-envelope': Specifies the North American 10x14 inch envelope
5295
           'na-number-9-envelope': Specifies the North American number 9 business envelope
5296
           'na-6x9-envelope': Specifies the North American 6x9 inch envelope
5297
           'na-10x15-envelope': Specifies the North American 10x15 inch envelope
5298
5299
       The following standard values are defined for the less commonly used media (white-only):
5300
           'executive-white': Specifies the white executive medium
5301
           'folio-white': Specifies the folio white medium
5302
           invoice-white': Specifies the white invoice medium
5303
           'ledger-white': Specifies the white ledger medium
5304
           'quarto-white': Specified the white quarto medium
5305
           iso-a0-white: Specifies the ISO A0 white medium
5306
           iso-al-white: Specifies the ISO A1 white medium
5307
           iso-a2-white: Specifies the ISO A2 white medium
5308
           iso-a6-white': Specifies the ISO A6 white medium
5309
           iso-a7-white': Specifies the ISO A7 white medium
5310
           iso-a8-white: Specifies the ISO A8 white medium
5311
           iso-a9-white: Specifies the ISO A9 white medium
5312
           iso-10-white': Specifies the ISO A10 white medium
5313
           iso-b0-white': Specifies the ISO B0 white medium
5314
           iso-b1-white': Specifies the ISO B1 white medium
5315
           iso-b2-white': Specifies the ISO B2 white medium
5316
           iso-b3-white: Specifies the ISO B3 white medium
5317
           iso-b6-white': Specifies the ISO B6 white medium
5318
           iso-b7-white': Specifies the ISO B7 white medium
5319
           iso-b8-white: Specifies the ISO B8 white medium
5320
           iso-b9-white': Specifies the ISO B9 white medium
5321
           iso-b10-white: Specifies the ISO B10 white medium
5322
           jis-b0-white': Specifies the JIS B0 white medium
5323
           "jis-b1-white": Specifies the JIS B1 white medium
5324
           jis-b2-white': Specifies the JIS B2 white medium
5325
           jis-b3-white': Specifies the JIS B3 white medium
5326
           jis-b6-white': Specifies the JIS B6 white medium
5327
           jis-b7-white': Specifies the JIS B7 white medium
5328
           jis-b8-white': Specifies the JIS B8 white medium
5329
           jis-b9-white': Specifies the JIS B9 white medium
5330
           jis-b10-white': Specifies the JIS B10 white medium
5331
5332
```

The following standard values are defined for engineering media:

```
'a': Specifies the engineering A size medium
5334
           b': Specifies the engineering B size medium
5335
           'c': Specifies the engineering C size medium
5336
           'd': Specifies the engineering D size medium
5337
           'e': Specifies the engineering E size medium
5338
5339
       The following standard values are defined for input-trays (from ISO DPA and the Printer MIB):
5340
           'top': The top input tray in the printer.
5341
           'middle': The middle input tray in the printer.
5342
           bottom': The bottom input tray in the printer.
5343
           'envelope': The envelope input tray in the printer.
5344
           'manual': The manual feed input tray in the printer.
5345
           large-capacity': The large capacity input tray in the printer.
5346
           'main': The main input tray
5347
           'side': The side input tray
5348
5349
       The following standard values are defined for media sizes (from ISO DPA):
5350
           iso-a0: Specifies the ISO A0 size: 841 mm by 1189 mm as defined in ISO 216
5351
           "iso-a1": Specifies the ISO A1 size: 594 mm by 841 mm as defined in ISO 216
5352
           "iso-a2": Specifies the ISO A2 size: 420 mm by 594 mm as defined in ISO 216
5353
           "iso-a3": Specifies the ISO A3 size: 297 mm by 420 mm as defined in ISO 216
5354
           "iso-a4": Specifies the ISO A4 size: 210 mm by 297 mm as defined in ISO 216
5355
           iso-a5': Specifies the ISO A5 size: 148 mm by 210 mm as defined in ISO 216
5356
           "iso-a6": Specifies the ISO A6 size: 105 mm by 148 mm as defined in ISO 216
5357
           "iso-a7": Specifies the ISO A7 size: 74 mm by 105 mm as defined in ISO 216
5358
           iso-a8': Specifies the ISO A8 size: 52 mm by 74 mm as defined in ISO 216
5359
           iso-a9: Specifies the ISO A9 size: 37 mm by 52 mm as defined in ISO 216
5360
           iso-a10': Specifies the ISO A10 size: 26 mm by 37 mm as defined in ISO 216
5361
           iso-bo: Specifies the ISO Bo size: 1000 mm by 1414 mm as defined in ISO 216
5362
           iso-b1: Specifies the ISO B1 size: 707 mm by 1000 mm as defined in ISO 216
5363
           "iso-b2": Specifies the ISO B2 size: 500 mm by 707 mm as defined in ISO 216
5364
           "iso-b3": Specifies the ISO B3 size: 353 mm by 500 mm as defined in ISO 216
5365
           "iso-b4": Specifies the ISO B4 size: 250 mm by 353 mm as defined in ISO 216
5366
           "iso-b5": Specifies the ISO B5 size: 176 mm by 250 mm as defined in ISO 216
5367
           "iso-b6": Specifies the ISO B6 size: 125 mm by 176 mm as defined in ISO 216
5368
           iso-b7: Specifies the ISO B7 size: 88 mm by 125 mm as defined in ISO 216
5369
5370
           iso-b8': Specifies the ISO B8 size: 62 mm by 88 mm as defined in ISO 216
           "iso-b9": Specifies the ISO B9 size: 44 mm by 62 mm as defined in ISO 216
5371
           "iso-b10": Specifies the ISO B10 size: 31 mm by 44 mm as defined in ISO 216
5372
           'na-letter': Specifies the North American letter size: 8.5 inches by 11 inches
5373
           'na-legal': Specifies the North American legal size: 8.5 inches by 14 inches
5374
           'executive': Specifies the executive size (7.25 X 10.5 in)
5375
           'folio': Specifies the folio size (8.5 X 13 in)
5376
```

```
"invoice": Specifies the invoice size (5.5 X 8.5 in)
5377
           'ledger': Specifies the ledger size (11 X 17 in)
5378
           'quarto': Specifies the quarto size (8.5 X 10.83 in)
5379
           iso-c3: Specifies the ISO C3 size: 324 mm by 458 mm as defined in ISO 269
5380
           "iso-c4': Specifies the ISO C4 size: 229 mm by 324 mm as defined in ISO 269
5381
           "iso-c5": Specifies the ISO C5 size: 162 mm by 229 mm as defined in ISO 269
5382
           iso-c6: Specifies the ISO C6 size: 114 mm by 162 mm as defined in ISO 269
5383
           iso-designated-long': Specifies the ISO Designated Long size: 110 mm by 220 mm as defined in ISO
5384
              269
5385
           'na-10x13-envelope': Specifies the North American 10x13 size: 10 inches by 13 inches
5386
           'na-9x12-envelope': Specifies the North American 9x12 size: 9 inches by 12 inches
5387
           'na-number-10-envelope': Specifies the North American number 10 business envelope size: 4.125
5388
              inches by 9.5 inches
5389
           'na-7x9-envelope': Specifies the North American 7x9 inch envelope size
5390
           'na-9x11-envelope': Specifies the North American 9x11 inch envelope size
5391
           'na-10x14-envelope': Specifies the North American 10x14 inch envelope size
5392
           'na-number-9-envelope': Specifies the North American number 9 business envelope size
5393
           'na-6x9-envelope': Specifies the North American 6x9 envelope size
5394
           'na-10x15-envelope': Specifies the North American 10x15 envelope size
5395
           'monarch-envelope': Specifies the Monarch envelope size (3.87 x 7.5 in)
5396
           jis-b0': Specifies the JIS B0 size: 1030mm x 1456mm
5397
           'jis-b1': Specifies the JIS B1 size: 728mm x 1030mm
5398
           jis-b2': Specifies the JIS B2 size: 515mm x 728mm
5399
           jis-b3': Specifies the JIS B3 size: 364mm x 515mm
5400
           jis-b4': Specifies the JIS B4 size: 257mm x 364mm
5401
           jis-b5': Specifies the JIS B5 size: 182mm x 257mm
5402
           jis-b6': Specifies the JIS B6 size: 128mm x 182mm
5403
           jis-b7': Specifies the JIS B7 size: 91mm x 128mm
5404
           jis-b8': Specifies the JIS B8 size: 64mm x 91mm
5405
           jis-b9': Specifies the JIS B9 size: 45mm x 64mm
5406
           jis-b10': Specifies the JIS B10 size: 32mm x 45mm
5407
```

# 16. APPENDIX D: Processing IPP Attributes

When submitting a print job to a Printer object, the IPP model allows a client to supply operation and Job Template attributes along with the document data. These Job Template attributes in the create request affect the rendering, production and finishing of the documents in the job. Similar types of instructions may also be contained in the document to be printed, that is, embedded within the print data itself. In addition, the Printer has a set of attributes that describe what rendering and finishing options which are supported by that Printer. This model, which allows for flexibility and power, also introduces the potential that at job submission time, these client-supplied attributes may conflict with either:

- what the implementation is capable of realizing (i.e., what the Printer supports), as well as
- the instructions embedded within the print data itself.

5418

5416

The following sections describe how these two types of conflicts are handled in the IPP model.

- 16.1 Fidelity
- If there is a conflict between what the client requests and what a Printer object supports, the client may request one of two possible conflict handling mechanisms:
- 1) either reject the job since the job can not be processed exactly as specified, or
- 2) allow the Printer to make any changes necessary to proceed with processing the Job the best it can.

54255426

5427

5428

5429

5430

5420

In the first case the client is indicating to the Printer object: "Print the job exactly as specified with no exceptions, and if that can't be done, don't even bother printing the job at all." In the second case, the client is indicating to the Printer object: "It is more important to make sure the job is printed rather than be processed exactly as specified; just make sure the job is printed even if client supplied attributes need to be changed or ignored."

The IPP model accounts for this situation by introducing an "ipp-attribute-fidelity" attribute.

In a create request, "ipp-attribute-fidelity" is a boolean operation attribute that is OPTIONALLY 5432 supplied by the client. The value 'true' indicates that total fidelity to client supplied Job Template 5433 attributes and values is required. The client is requesting that the Job be printed exactly as specified, and 5434 if that is not possible then the job MUST be rejected rather than processed incorrectly. The value 'false' 5435 indicates that a reasonable attempt to print the Job is acceptable. If a Printer does not support some of 5436 the client supplied Job Template attributes or values, the Printer MUST ignore them or substitute any 5437 supported value for unsupported values, respectively. The Printer may choose to substitute the default 5438 value associated with that attribute, or use some other supported value that is similar to the unsupported 5439 requested value. For example, if a client supplies a "media" value of 'na-letter', the Printer may choose 5440 to substitute 'iso-a4' rather than a default value of 'envelope'. If the client does not supply the "ipp-5441 attribute-fidelity" attribute, the Printer assumes a value of 'false'. 5442

Each Printer implementation MUST support both types of "fidelity" printing (that is whether the client supplies a value of 'true' or 'false'):

- If the client supplies 'false' or does not supply the attribute, the Printer object MUST always accept the request by ignoring unsupported Job Template attributes and by substituting unsupported values of supported Job Template attributes with supported values.
- If the client supplies 'true', the Printer object MUST reject the request if the client supplies unsupported Job Template attributes.

5449 5450

5451

5452

5453

5454

5455

5456

5443

5444

5445

5446

5447

5448

Since a client can always query a Printer to find out exactly what is and is not supported, "ipp-attribute-fidelity" set to 'false' is useful when:

- 1) The End-User uses a command line interface to request attributes that might not be supported.
- 2) In a GUI context, if the End User expects the job might be moved to another printer and prefers a sub-optimal result to nothing at all.
- 3) The End User just wants something reasonable in lieu of nothing at all.

5458

# 16.2 Page Description Language (PDL) Override

If there is a conflict between the value of an IPP Job Template attribute and a corresponding instruction 5459 in the document data, the value of the IPP attribute SHOULD take precedence over the document 5460 instruction. Consider the case where a previously formatted file of document data is sent to an IPP 5461 Printer. In this case, if the client supplies any attributes at job submission time, the client desires that 5462 those attributes override the embedded instructions. Consider the case were a previously formatted 5463 document has embedded in it commands to load 'iso-a4' media. However, the document is passed to an 5464 end user that only has access to a printer with 'na-letter' media loaded. That end user most likely wants 5465 to submit that document to an IPP Printer with the "media" Job Template attribute set to 'na-letter'. The 5466 job submission attribute should take precedence over the embedded PDL instruction. However, until 5467 companies that supply document data interpreters allow a way for external IPP attributes to take 5468 precedence over embedded job production instructions, a Printer might not be able to support the 5469 semantics that IPP attributes override the embedded instructions. 5470

The IPP model accounts for this situation by introducing a "pdl-override-supported" attribute that describes the Printer objects capabilities to override instructions embedded in the PDL data stream. The value of the "pdl-override-supported" attribute is configured by means outside the scope of this IPP/1.1 document.

This REQUIRED Printer attribute takes on the following values:

- 'attempted': This value indicates that the Printer object attempts to make the IPP attribute values take precedence over embedded instructions in the document data, however there is no guarantee.
- 'not-attempted': This value indicates that the Printer object makes no attempt to make the IPP attribute values take precedence over embedded instructions in the document data.

5479 5480 5481

5482

5483

5484

5485

5486

5487

5488

5489

5471

5472

5473

5474

5475

5476

5477

5478

At job processing time, an implementation that supports the value of 'attempted' might do one of several different actions:

- 1) Generate an output device specific command sequence to realize the feature represented by the IPP attribute value.
- 2) Parse the document data itself and replace the conflicting embedded instruction with a new embedded instruction that matches the intent of the IPP attribute value.
- 3) Indicate to the Printer that external supplied attributes take precedence over embedded instructions and then pass the external IPP attribute values to the document data interpreter.
- 4) Anything else that allows for the semantics that IPP attributes override embedded document data instructions.

549054915492

5493

5494

Since 'attempted' does not offer any type of guarantee, even though a given Printer object might not do a very "good" job of attempting to ensure that IPP attributes take a higher precedence over instructions embedded in the document data, it would still be a conforming implementation.

 At job processing time, an implementation that supports the value of 'not-attempted' might do one of the following actions:

- 1) Simply pre-pend the document data with the PDL instruction that corresponds to the client-supplied PDL attribute, such that if the document data also has the same PDL instruction, it will override what the Printer object pre-pended. In other words, this implementation is using the same implementation semantics for the client-supplied IPP attributes as for the Printer object defaults.
- 2) Parse the document data and replace the conflicting embedded instruction with a new embedded instruction that approximates, but does not match, the semantic intent of the IPP attribute value.

Note: The "ipp-attribute-fidelity" attribute applies to the Printer's ability to either accept or reject other unsupported Job Template attributes. In other words, if "ipp-attribute-fidelity" is set to 'true', a Job is accepted if and only if the client supplied Job Template attributes and values are supported by the Printer. Whether these attributes actually affect the processing of the Job when the document data contains embedded instructions depends on the ability of the Printer to override the instructions embedded in the document data with the semantics of the IPP attributes. If the document data attributes can be overridden ("pdl-override-supported" set to 'attempted'), the Printer makes an attempt to use the IPP attributes when processing the Job. If the document data attributes can not be overridden ("pdl-override-supported" set to 'not-attempted'), the Printer makes no attempt to override the embedded document data instructions with the IPP attributes when processing the Job, and hence, the IPP attributes may fail to affect the Job processing and output when the corresponding instruction is embedded in the document data.

# 16.3 Using Job Template Attributes During Document Processing.

The Printer object uses some of the Job object's Job Template attributes during the processing of the document data associated with that job. These include, but are not limited to, "orientation-requested", "number-up", "sides", "media", and "copies". The processing of each document in a Job Object MUST follow the steps below. These steps are intended only to identify when and how attributes are to be used in processing document data and any alternative steps that accomplishes the same effect can be used to implement this specification.

- 1. Using the client supplied "document-format" attribute or some form of document format detection algorithm (if the value of "document-format" is not specific enough), determine whether or not the document data has already been formatted for printing. If the document data has been formatted, then go to step 2. Otherwise, the document data MUST be formatted. The formatting detection algorithm is implementation defined and is not specified by this specification. The formatting of the document data uses the "orientation-requested" attribute to determine how the formatted print data should be placed on a print-stream page, see section 4.2.10 for the details.
- 2. The document data is in the form of a print-stream in a known media type. The "page-ranges" attribute is used to select, as specified in section 4.2.7, a sub-sequence of the pages in the print-stream that are to be processed and images.

3. The input to this step is a sequence of print-stream pages. This step is controlled by the "number-up" attribute. If the value of "number-up" is N, then during the processing of the print-stream pages, each N print-stream pages are positioned, as specified in section 4.2.9, to create a single impression. If a given document does not have N more print-stream pages, then the completion of the impression is controlled by the "multiple-document-handling" attribute as described in section 4.2.4; when the value of this attribute is 'single-document' or 'single-document-new-sheet', the print-stream pages of document data from subsequent documents is used to complete the impression.

The size(scaling), position(translation) and rotation of the print-stream pages on the impression is implementation defined. Note that during this process the print-stream pages may be rendered to a form suitable for placing on the impression; this rendering is controlled by the values of the "printer-resolution" and "print-quality" attributes as described in sections 4.2.12 and 4.2.13. In the case N=1, the impression is nearly the same as the print-stream page; the differences would only be in the size, position and rotation of the print-stream page and/or any decoration, such as a frame to the page, that is added by the implementation.

4. The collection of impressions is placed, in sequence, onto sides of the media sheets. This placement is controlled by the "sides" attribute and the orientation of the print-stream page, as described in section 4.2.8. The orientation of the print-stream pages affects the orientation of the impression; for example, if "number-up" equals 2, then, typically, two portrait print-stream pages become one landscape impression. Note that the placement of impressions onto media sheets is also controlled by the "multiple-document-handling" attribute as described in section 4.2.4.

5. The "copies" and "multiple-document-handling" attributes are used to determine how many copies of each media instance are created and in what order. See sections 4.2.5 and 4.2.4 for the details.

6. When the correct number of copies are created, the media instances are finished according to the values of the "finishings" attribute as described in 4.2.6. Note that sometimes finishing operations may require manual intervention to perform the finishing operations on the copies, especially uncollated copies. This specification allows any or all of the processing steps to be performed automatically or manually at the discretion of the Printer object.

# 17. APPENDIX E: Generic Directory Schema

This section defines a generic schema for an entry in a directory service. A directory service is a means by which service users can locate service providers. In IPP environments, this means that IPP Printers can be registered (either automatically or with the help of an administrator) as entries of type printer in the directory using an implementation specific mechanism such as entry attributes, entry type fields, specific branches, etc. IPP clients can search or browse for entries of type printer. Clients use the directory service to find entries based on naming, organizational contexts, or filtered searches on attribute values of entries. For example, a client can find all printers in the "Local Department" context. Authentication and authorization are also often part of a directory service so that an administrator can

place limits on end users so that they are only allowed to find entries to which they have certain access rights. IPP itself does not require any specific directory service protocol or provider.

Note: Some directory implementations allow for the notion of "aliasing". That is, one directory entry object can appear as multiple directory entry object with different names for each object. In each case, each alias refers to the same directory entry object which refers to a single IPP Printer object.

The generic schema is a subset of IPP Printer Job Template and Printer Description attributes (sections 5582 4.2 and 4.4). These attributes are identified as either RECOMMENDED or OPTIONAL for the 5583 directory entry itself. This conformance labeling is NOT the same conformance labeling applied to the 5584 attributes of IPP Printers objects. The conformance labeling in this Appendix is intended to apply to 5585 directory templates and to IPP Printer implementations that subscribe by adding one or more entries to a 5586 directory. RECOMMENDED attributes SHOULD be associated with each directory entry. OPTIONAL 5587 attributes MAY be associated with the directory entry (if known or supported). In addition, all directory 5588 entry attributes SHOULD reflect the current attribute values for the corresponding Printer object. 5589

The names of attributes in directory schema and entries SHOULD be the same as the IPP Printer attribute names as shown.

In order to bridge between the directory service and the IPP Printer object, one of the RECOMMENDED directory entry attributes is the Printer object's "printer-uri-supported" attribute. The IPP client queries the "printer-uri-supported" attribute in the directory entry and then addresses the IPP Printer object using one of its URIs. The "uri-security-supported" attribute identifies the protocol (if any) used to secure a channel.

The following attributes define the generic schema for directory entries of type PRINTER:

printer-uri-supported	RECOMMENDED	Section 4.4.1
uri-security-supported	RECOMMENDED	Section 4.4.2
printer-name	RECOMMENDED	Section 4.4.3
printer-location	RECOMMENDED	Section 4.4.4
printer-info	OPTIONAL	Section 4.4.5
printer-more-info	OPTIONAL	Section 4.4.6
printer-make-and-model	RECOMMENDED	Section 4.4.8
charset-supported	OPTIONAL	Section 4.4.15
generated-natural-language-		
supported	OPTIONAL	Section 4.4.17
document-format-supported	RECOMMENDED	Section 4.4.19
color-supported	RECOMMENDED	Section 4.4.23
finishings-supported	OPTIONAL	Section 4.2.6
number-up-supported	OPTIONAL	Section 4.2.7
sides-supported	RECOMMENDED	Section 4.2.8
media-supported	RECOMMENDED	Section 4.2.11
printer-resolution-supported	OPTIONAL	Section 4.2.12
print-quality-supported	OPTIONAL	Section 4.2.13
pages-per-minute	OPTIONAL	Section 4.4.33
pages-per-minute-color	OPTIONAL	Section 4.4.34
	uri-security-supported printer-name printer-location printer-info printer-more-info printer-make-and-model charset-supported generated-natural-language- supported document-format-supported color-supported finishings-supported number-up-supported sides-supported media-supported printer-resolution-supported print-quality-supported pages-per-minute	uri-security-supported RECOMMENDED printer-name RECOMMENDED printer-location RECOMMENDED printer-info OPTIONAL printer-more-info OPTIONAL printer-make-and-model RECOMMENDED charset-supported OPTIONAL generated-natural-language- supported OPTIONAL document-format-supported RECOMMENDED color-supported RECOMMENDED finishings-supported OPTIONAL number-up-supported OPTIONAL sides-supported RECOMMENDED media-supported RECOMMENDED printer-resolution-supported OPTIONAL print-quality-supported OPTIONAL pages-per-minute OPTIONAL

deBry, Hastings, Herriot, Isaacson, Powell

5597

February 17, 1999

5625

5626

5634

5635

5639

5640

5641

5642

5643

5644

5645

18. APPENDIX F: Differences between the IPP/1.0 and IPP/1.1 "Model and Semantics" Specifications

The following IPP/1.0 [IPP-MOD1.0] extensions and clarifications have been incorporated into IPP/1.1:

- 1. Section 3.1.7 clarified that only the version number parameter will be carried forward into future major or minor versions of the protocol.
- 5623 2. Section 3.2.1.1 clarified that the Printer object rejects a Print-Job request if it does not support the "compression" operation attribute and a client supplies it.
  - 3. Sections 3.2.7, 3.2.8, and 3.2.9 added the OPTIONAL Pause-Printer, Resume-Printer, and Purge-Jobs operations
- 4. Sections 3.3.5, 3.3.6, and 3.3.7 added the OPTIONAL Hold-Job, Release-Job, and Restart-Job operations.
- 5. Section 4.1.9 added 'image-tiff' and 'application/pdf' values.
- 6. Section 4.2.2 added the 'indefinite' keyword value to the "job-hold-until" attribute for use with the create operations and Hold-Job and Restart-Job operations.
- 7. Section 4.2.6 added more enum values to the "finishings" Job Template attribute.
- 8. Section 4.3.7.1 added the Partitioning of Job States section.
  - 9. Section 4.3.8 added the 'job-restartable' keyword value to the "job-state-reasons" attribute for use with the Restart-Job operation.
- 10. Section 4.4.2 added the 'tls' keyword value to the "uri-security-supported" attribute.
- 11. Section 4.4.11 added the 'moving-to-paused' keyword value to the "printer-state-reasons" attribute for use with the Pause-Job operation.
  - 12. Section 4.4.11 replaced the duplicate 'marker-supply-low' keyword with the missing 'toner-empty' keyword for the "printer-state-reasons" attribute.
    - 13. Section 4.4.13 added the enum values to the "operations-supported" attribute for the new operations. Clarified that the values of this attribute are encoded as any enum, namely 32-bit values.
    - 14. Sections 4.4.33 and 4.4.34 added the OPTIONAL "pages-per-minute" and "pages-per-minute-color" Printer Description attributes.
- 15. Section 8.5 added the security discussion around the new operator operations.
- 16. Section 17 added the OPTIONAL "pages-per-minute" and "pages-per-minute-color" Printer attributes to the Directory schema.
- The following changes were made to IPP/1.0 [IPP-MOD1.0] to create this IPP/1.1 document:
- 1. Section 3.1.7, 5.2.4, and 14.1.5.4 IPP objects MUST support both version 1.0 and 1.1. Clients MUST support version 1.1 and MAY support version 1.0.
- 2. Section 4.1.9 deleted 'text/plain; charset=iso-10646-ucs-2', since binary is not legal with the 'text' type.
- 3. Section 5.4, 8.2, and 8.7 changed the IPP object security requirements from OPTIONAL nonstandards track SSL3 to RECOMMENDED standards track TLS. Changed the client security

IPP/1.1: Model and Semantics

INTERNET-DRAFT

5660

February 17, 1999